TOOLING TYPE	TOOLING NO.
内模(P1)	MPM-0561
外模(P1)	MPM-0559
内模(P2)	MPM-0074
外模(P2)	MPM-0359

REVISIONS

REV.	ECN NO.	DESCRIPTION	DRAW	DATE
A0	NA	初始版本	杜建才	2021.09.08

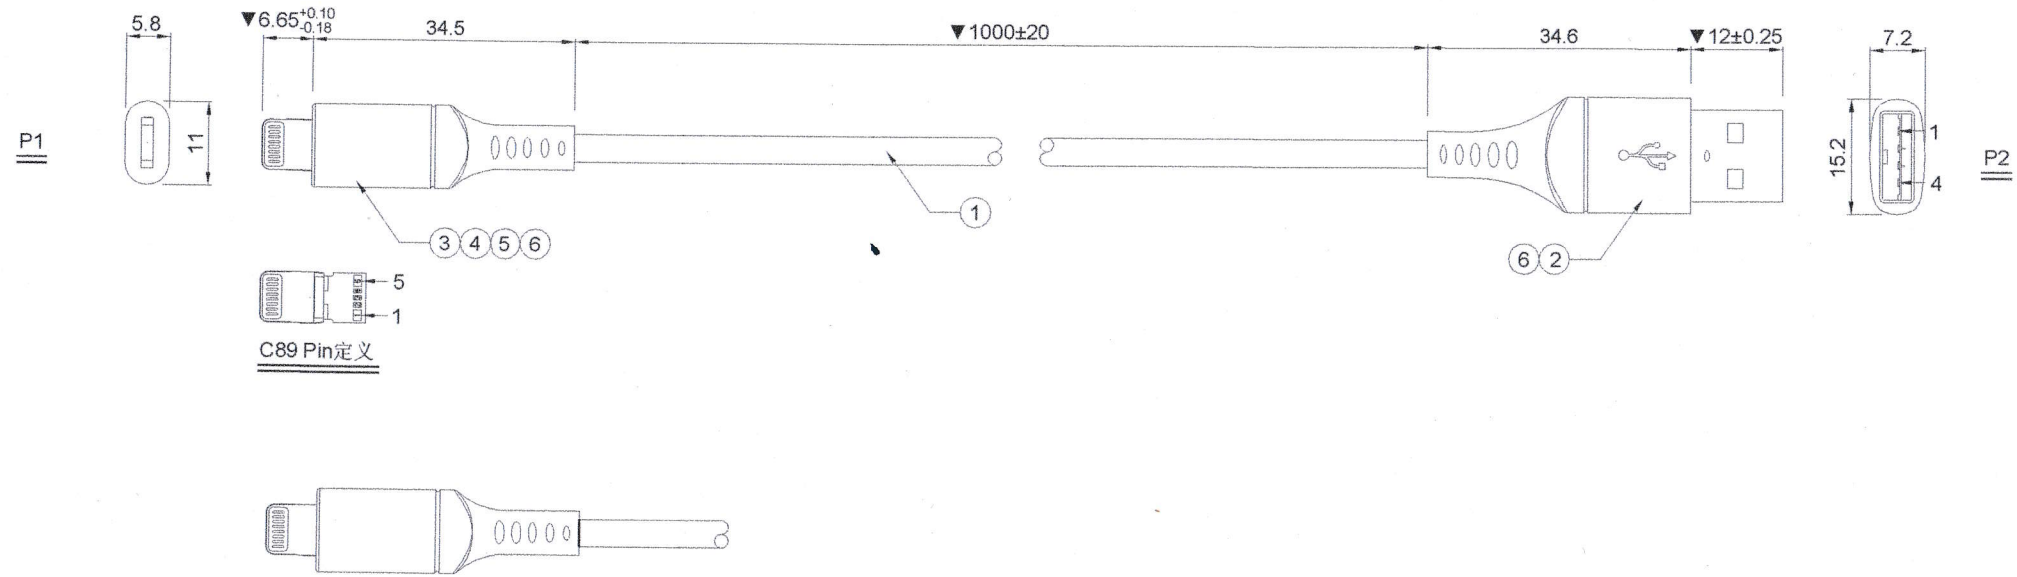

ITEM	PART NO.	NAME	DESCRIPTION	Q'TY	UNIT
6	OTH-000000164	塑胶原料	塑胶原料 45P PVC材质,苹果白/过ROHS2.0+过加州65	0.008	KG
5	OTH-000000174	塑胶原料	塑胶原料 PE材质,低密度/透明/LLDPE线材内模用/过REACH/ROHS2.0/SCCP/17P	0.004	KG
4	MMT-CA7903400	马口铁	C94短体马口铁/一体式带尾卡 材质:SUS:304 L=12.6mm 尺寸:7.9*3.4mm(T06027-1G)	1	PCS
3	ETT-IPH5C8900	MFI IPH5端子/C89	MFI IPH5端子/C89 充电加数据线专用(端子头上不带铁壳)MFI677-16892 A公对lightning(新)	1	PCS
2	ETC-D04205000	USB2.0 端子	USB2.0 AM 防开口 白色PBT胶芯 端子黄铜镀金1U" 铁壳镀镍80U" 铁壳与第4pin短路 L=20.50mm RoHS2.0	1	PCS
1	EWD-435100023	数据线线	23AWG(53/0.08TC)(ID:1.0 HDPE红黑)*2C+30AWG(11/0.08TC)(ID:0.7 白绿HDPE)*2C+AL+B(16/8/0.08TC)编织/白色PVC外被/OD=3.5MM(裁线尺寸:L=1070±5MM)过CE/ROHS	1	PCS

注意:

一、测试要求:

1.100%无开路、短路及错位。

2.绝缘阻抗:DC300V/0.01s,10MΩ。

3.导通阻抗:2Ω。

二、标示"▼"的尺寸为重点尺寸。

三、本产品使用原物料及制程必须符合RoHS2.0环境管理物质相关规定。

SHELL	SHIELD	DRAIN+BRAID	SHELL
5	GND		4
4	NC		NC
3	D+	GREEN	3
2	D-	WHITE	2
1	VBUS	RED	1
P1	SIGNAL	COLOR	P2

WIRE CONNECTION TABLE

X.±1	X°.
.X±0.3	.X°
.XX±0.20	.XX°
.XXX±0.100	.XXX°
UNITS:	mm

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MSH ECECTRONIC AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF MSH ECECTRONIC

Customer NO: 6015

Customer P/N: NA

PART NO. FCA2493/FCA2494

DRAW: 杜建才2021.09.08

CHKD:

APPD: 周亚丽 8/sep-21

Mei Shun He Electronic Limited

TITLE: USB2.0 AM TO Lightning(C89)

DWG NO: FCA2493/FCA2494

SCALE	SHEET	REV.
1:1	1/1	A0