


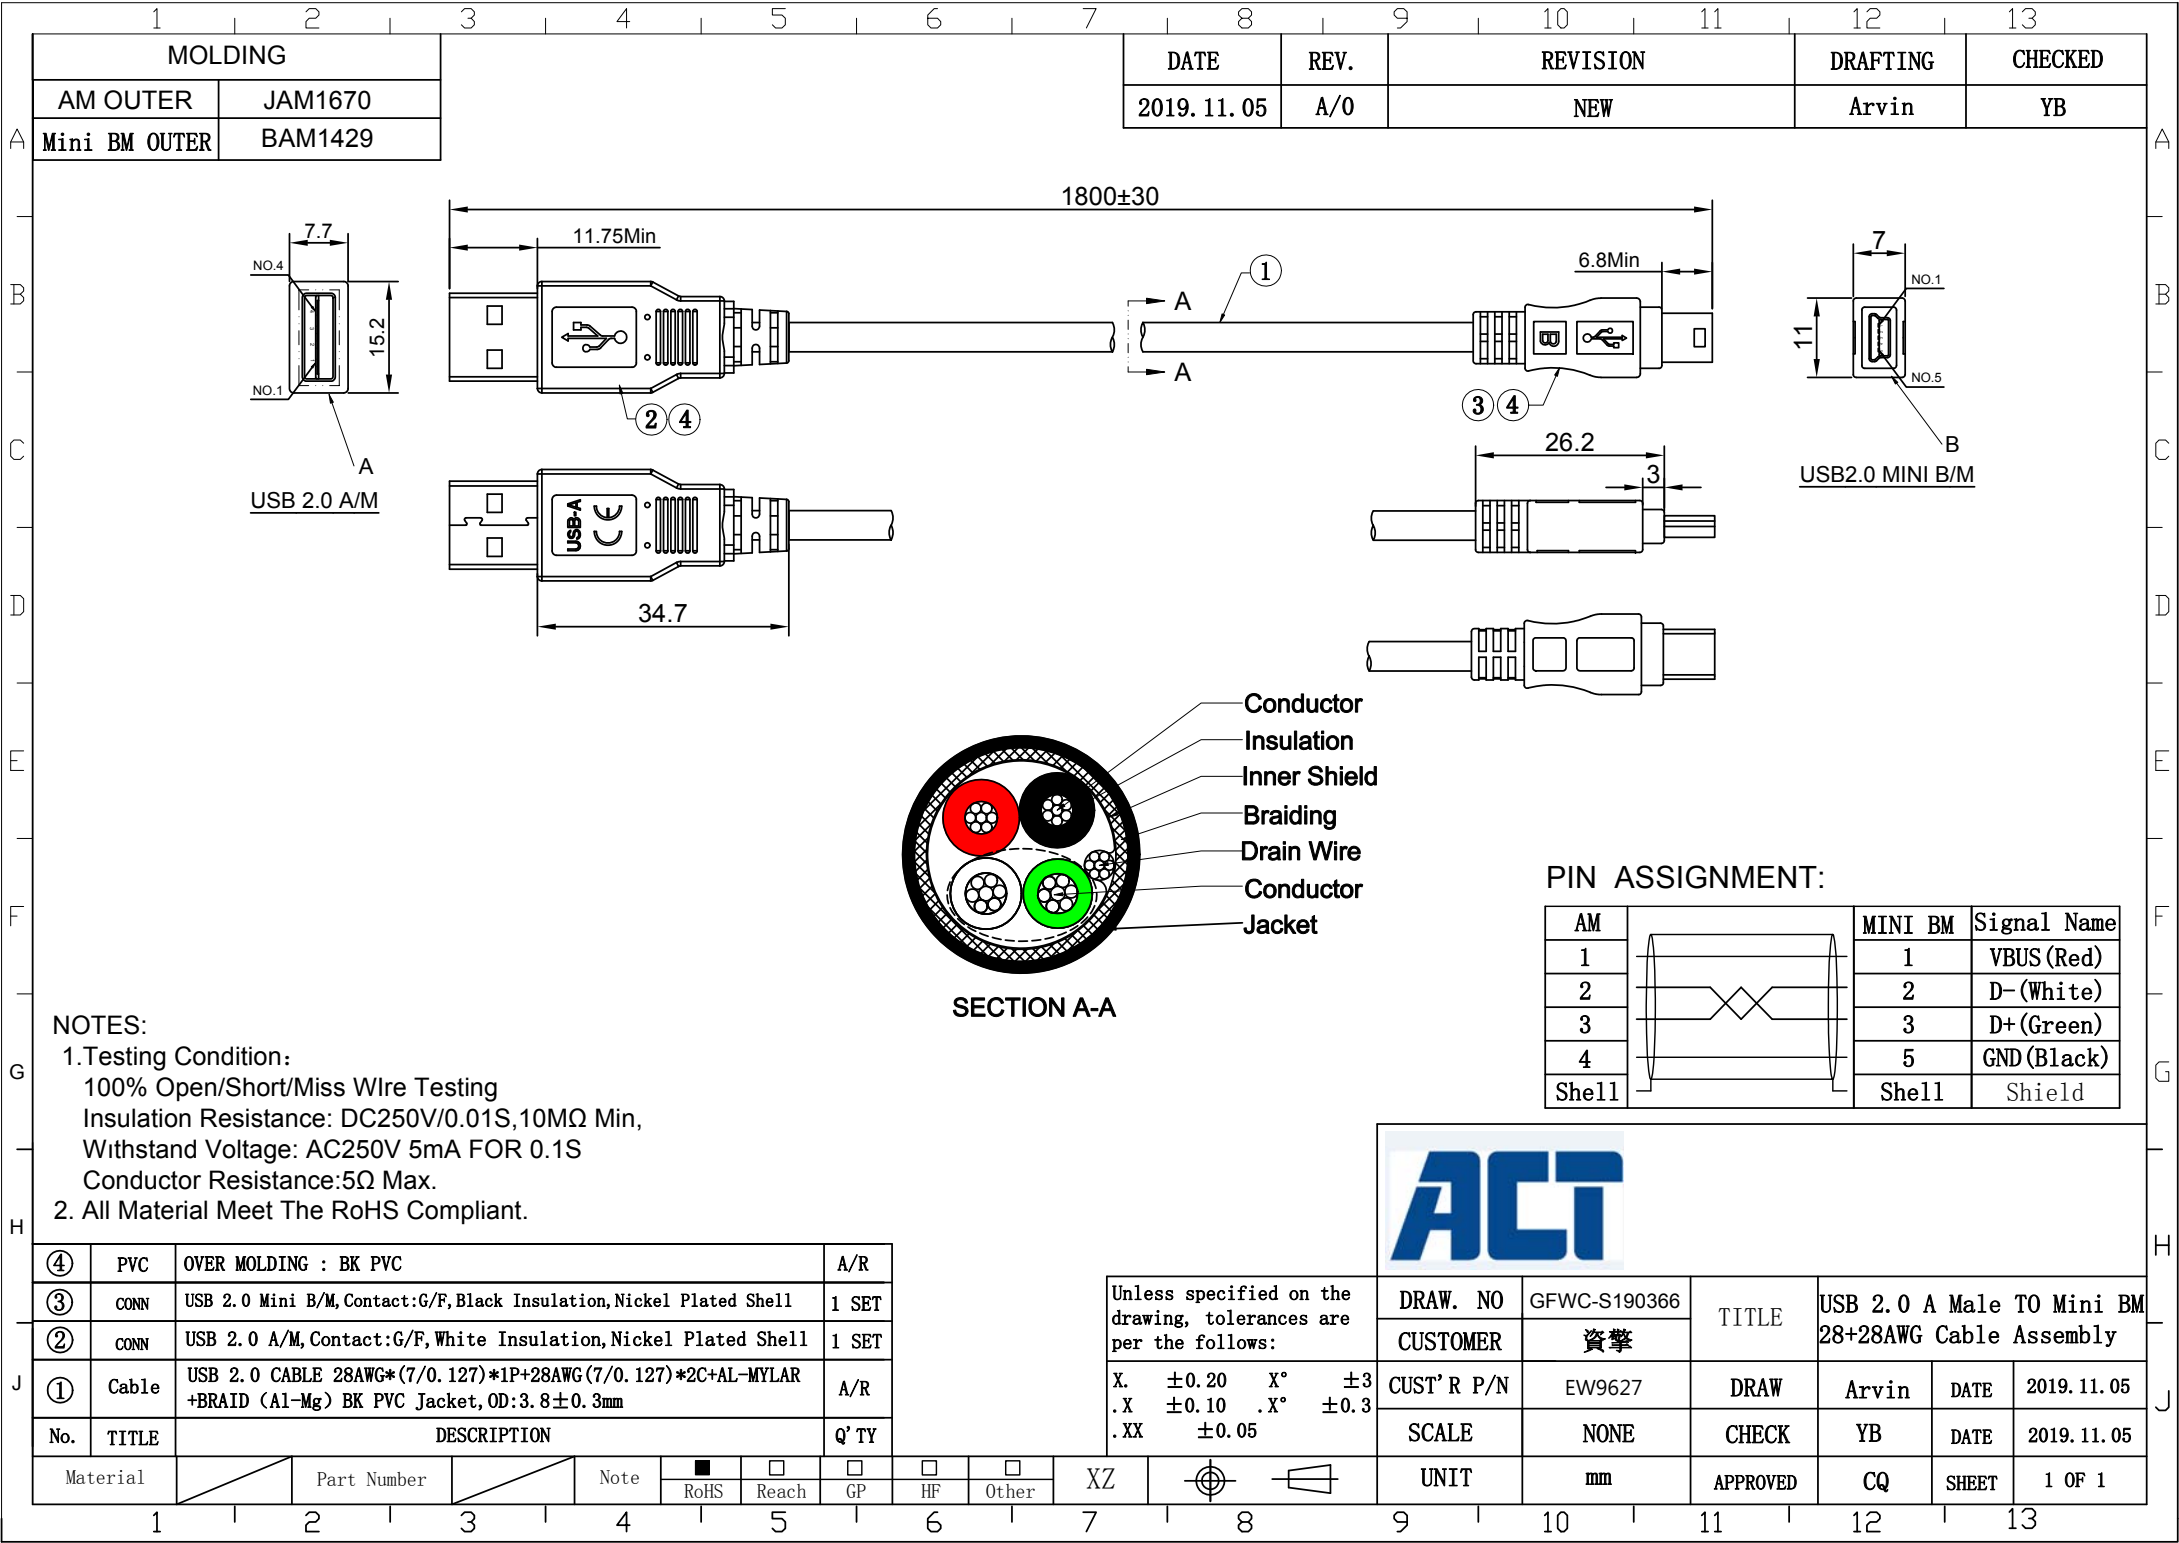

NOTES:

1. Testing Condition:

100% Open/Short/Miss Wire Testing

Insulation Resistance: DC250V/0.01S, 10MΩ Min,

Withstand Voltage: AC250V 5mA FOR 0.1S

Conductor Resistance: 5Ω Max.

2. All Material Meet The RoHS Compliant.

④	PVC	OVER MOLDING : BK PVC	A/R
③	CONN	USB 2.0 Mini B/M, Contact:G/F, Black Insulation, Nickel Plated Shell	1 SET
②	CONN	USB 2.0 A/M, Contact:G/F, White Insulation, Nickel Plated Shell	1 SET
①	Cable	USB 2.0 CABLE 28AWG*(7/0.127)*1P+28AWG(7/0.127)*2C+AL-MYLAR +BRAID (Al-Mg) BK PVC Jacket, OD:3.8±0.3mm	A/R
No.	TITLE	DESCRIPTION	Q' TY
Material		Part Number	Note

Unless specified on the drawing, tolerances are per the follows:				DRAW. NO				GFWC-S190366				TITLE			
X. ±0.20 X° ±3				CUSTOMER				資擎				USB 2.0 A Male TO Mini B/M 28+28AWG Cable Assembly			
.X ±0.10 .X° ±0.3				CUST' R P/N				EW9627				DRAW			
.XX ±0.05				SCALE				NONE				CHECK			
				UNIT				mm				APPROVED			
												YB			
												DATE			
												2019.11.05			
												YB			
												DATE			
												2019.11.05			
												1 OF 1			