


AV Presentation and Collaboration System

AT-OME-CS31-SA-HDBT

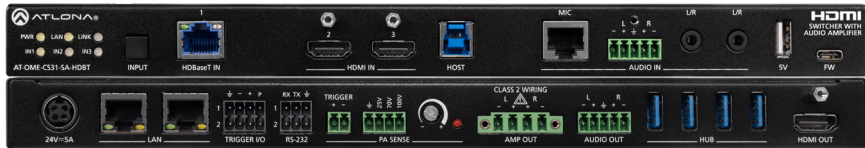

The Atlona **AT-OME-CS31-SA-HDBT** is an AV presentation and collaboration system for classrooms and conference rooms. It features AV switching of remote and local sources, a mixer amplifier, and USB hub.

The switcher has one HDBaseT® input supporting extension of HDMI, Ethernet, power, control, and USB 2.0 data up to 330 feet (100 meters) as well as two HDMI® inputs. Sources connected to these inputs, such as laptops, computers, and document cameras, are routed to the HDMI output connected to a projector or display. The amplifier of the OME-CS31-SA-HDBT delivers either two channels of 25 watts or a single channel of 50 watts into 4 or 8 ohms. It features one balanced stereo audio input and two unbalanced stereo audio inputs with independent level control for each. A balanced stereo line level output allows the mixed signal to be passed to an assistive listening system or separate amplifier. The OME-CS31-SA-HDBT's USB system integrates a USB 2.0 host over HDBaseT with a local USB 3.0 host and connections for four peripheral devices such as cameras, speakerphones, interactive displays, keyboards, mice, or storage devices.

Package Contents


- 1 x AT-OME-CS31-SA-HDBT
- 1 x Envelope of mating connectors for all captive-screw connectors
- 1 x Surface mount brackets
- 4 x rubber feet
- 1 x 24 V / 5 A power supply
- 1 x AC cord
- 1 x Insert w/ QR code



IMPORTANT: Visit <https://www.atlona.com/product/at-ome-cs31-sa-hdbt> for the latest firmware updates and User Manual.



Front Panel Descriptions

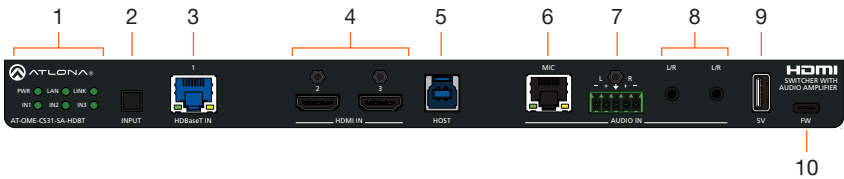

1 LED Indicators

Displays the current state of the unit:
PWR - LED will be red while the unit is booting and green when operating normally.

LAN - LED will be green when connected to a switch or other LAN device.

LINK - LED will be green when connected to an HDBaseT transmitter.

IN1, IN2, IN3 - LED will be green when set to the current input.

2 INPUT

Press and release this button to cycle between each of the available inputs.

3 HDBaseT IN

Connect a category cable from this port to a compatible HDBaseT transmitter or switcher.

4 HDMI IN

Connect an HDMI cable from each of these ports to an HDMI source.

5 HOST

Connect a USB cable from this port to the host USB device.

6 MIC

This port is for future use.

7 VOICE L/R

Connect the included 5-pin captive screw connector from this port to a music player, Bluetooth receiver, or other unbalanced stereo source.

8 L/R

Connect a wireless microphone to each of these 3.5 mm mini-stereo ports.


9 5V

Provides +5 V USB power. Can be used to attach Bluetooth™ audio adapters or powered USB hubs.

10 FW

This USB-C port is used to update the firmware. Refer to the User Manual for more information.

Rear Panel Descriptions

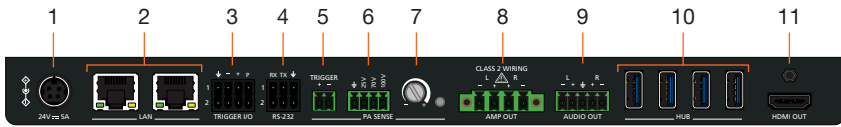

- 1 24V / 5A**
 Connect the included 24 V / 5 A power supply from this port to an available AC electrical outlet.
- 2 LAN**
 Connect an Ethernet cable from either of these ports to the LAN. The other LAN port can be used to connect an Ethernet cable to a display or other device.
- 3 TRIGGER I/O**
 Connect the included double-stack 4-pin connector to this port. This port consists of two separate ports: **TRIGGER I/O 1** (top) and **TRIGGER I/O 2** (bottom).
- 4 RS-232**
 Connect the included double-stack 3-pin captive screw connector to this port. This port consists of two separate ports: **RS-232 1** (top) and **RS-232 2** (bottom).
- 5 TRIGGER (PA SENSE)**
 Connect the included 2-pin captive screw connector to this port. Supports audio mute with contact closure or PA sense so announcements can be heard clearly.
- 6 GND/25V/75V/100V (PA SENSE)**
 Connect the included 4-pin captive screw connector from this port to a PA speaker system.
- 7 Potentiometer (PA SENSE)**
 Adjusts the trigger voltage sensitivity.
- 8 AMP OUT**
 Connect the included 4-pin captive screw connector from this port to a pair of program / stereo speakers. Supports 2 x 25 watts @ 4/8 ohms amplifier (stereo or dual mono) or 1 x 50 watts @ 4/8 ohms (bridged).
- 9 AUDIO OUT**
 Connect the included 5-pin captive screw connector from this port to an assistive listening device or additional amplifier.
- 10 HUB**
 Connect up to 4 USB devices to these ports.
- 11 HDMI OUT**
 Connect an HDMI cable from this port to a display.

Installation


1. Connect an HDMI cable from a source to these **HDMI IN** ports.
2. Connect an HDMI cable from the **HDMI OUT** port to a local display.
3. Connect a category cable from the **HDBaseT IN** port to a compatible HDBaseT transmitter or switcher. Refer to the table below for information on maximum cable length and supported resolutions.



IMPORTANT: Stranded or patch cable is not recommended due to performance issues. Shielded cables are strongly recommended to minimize signal noise and interference.

| Cable | 4K/UHD - Feet / Meters | | 1080p - Feet / Meters | |
|-----------|------------------------|-----|-----------------------|-----|
| HDMI | 15 | 5 | 30 | 10 |
| CAT5e | 295 | 90 | 330 | 100 |
| CAT6/6a/7 | 330 | 100 | 330 | 100 |


4. Connect a USB cable from the **HOST** port to a computer.
5. Connect an Ethernet cable from one of the **LAN** port to the Local Area Network (LAN). This step will be required in order to access the built-in web server. Connect the other **LAN** port to a display or other Ethernet device.
6. Connect the included 5-pin captive screw connector from the **AUDIO IN** port to source with a balanced audio output. This port also has a chassis ground that is to be used if there is any noise in the balanced signal.
7. Connect a music player, Bluetooth receiver, or other unbalanced stereo source to each of these **L/R** 3.5 mm mini-stereo ports.
8. Connect a USB device that needs power to this port, such as a Bluetooth receiver, to the **5V** port.
9. Connect the included double-stacked 4-pin captive screw connector to this port. If only a single port is being used, then connect the included single 4-pin captive screw. Two **TRIGGER I/O** ports are provided: **TRIGGER I/O 1** and **TRIGGER I/O 2**. These ports can be used to control projection screens or other devices.

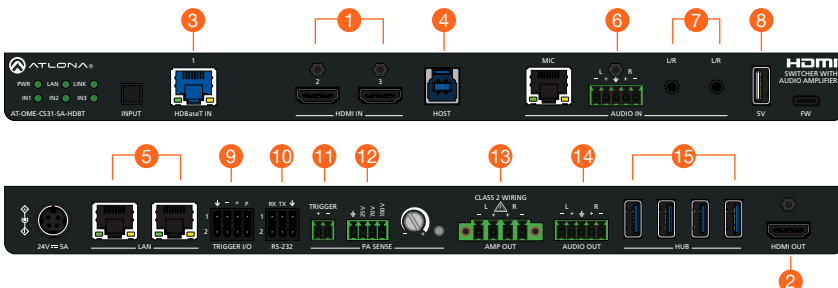



Installation (continued)

10. Connect the included double-stacked 3-pin captive screw connector to this port. If only a single port is being used, then connect the included single 3-pin captive screw. Two RS-232 ports are provided: **RS-232 1** and **RS-232 2**. These ports can be used for console and display control.
11. Connect the included 2-pin captive screw connector from the **TRIGGER (PA SENSE)** port to a fire alarm system or other contact-closure input.
12. Connect the included 4-pin captive screw connector from the **GND/25V/70V/100V** port to a PA speaker system. Make sure to connect the wires to the matching voltage of the PA system.
13. Connect the included 4-pin captive screw connector from the **AMP OUT** port to a pair of program / stereo speakers. Supports 2 x 25 watts @ 4/8 ohms amplifier (stereo or dual mono) or 1 x 50 watts @ 4/8 ohms (bridged).
14. Connect the included 5-pin captive screw connector from the **AUDIO OUT** port to an assistive listening device or additional amplifier.
15. Connect up to 4 USB devices to these **HUB** ports.
16. Connect the included power supply from the **24V/5A** port to an available AC electrical outlet.

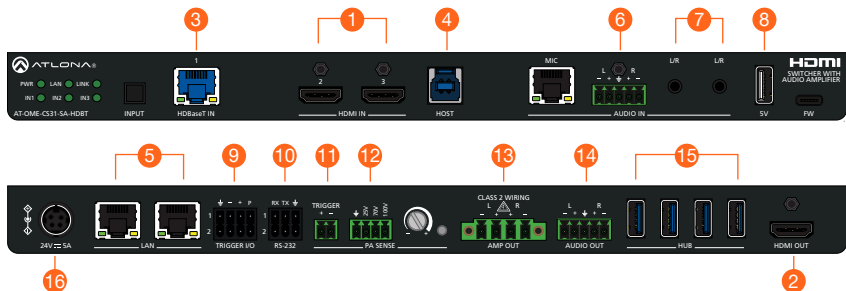



Accessing the built-in Web Server

The AT-OME-CS31-SA-HDBT includes a built-in web server, which allows easy management and control of all features. Before using the web server, a password must be created.

1. Make sure that an Ethernet cable is connected between one of the **LAN** ports on the AT-OME-CS31-SA-HDBT and the network.
2. Launch a web browser and enter the IP address of the unit.
3. The **Login** page will be displayed.
4. Enter **Atlona** in the provided field.
5. Click the **Login** button.
6. The **Change Password** screen will be displayed.
7. Enter the desired password in the **Admin Password** field.
8. Click the **Save** button.

Warranty

To view the product warranty, use the following link or QR code:

<https://atlona.com/warranty/>.



English Declaration of Conformity

The English version can be found under the resources tab at:

<https://atlona.com/product/at-ome-cs31-sa-hdbt/>.



Chinese Declaration of Conformity 中国RoHS合格声明

由SKU列出於:

<https://atlona.com/about-us/china-rohs/>.



The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.