


ELECTRICAL TEST:

- 1.100% OPEN SHORT MIS WIRE TEST
- 2.CONTACT RESISTANCE:5 OHM MAX
- 3.INSULATION RESISTANCE:5M OHM MIN
- 4.HI-POT TEST:DC 300V/10ms
- 5.PASS 4K@60HZ TEST



CONSUMER ITEM	LENGTH(mm)
AC3902	2000±30

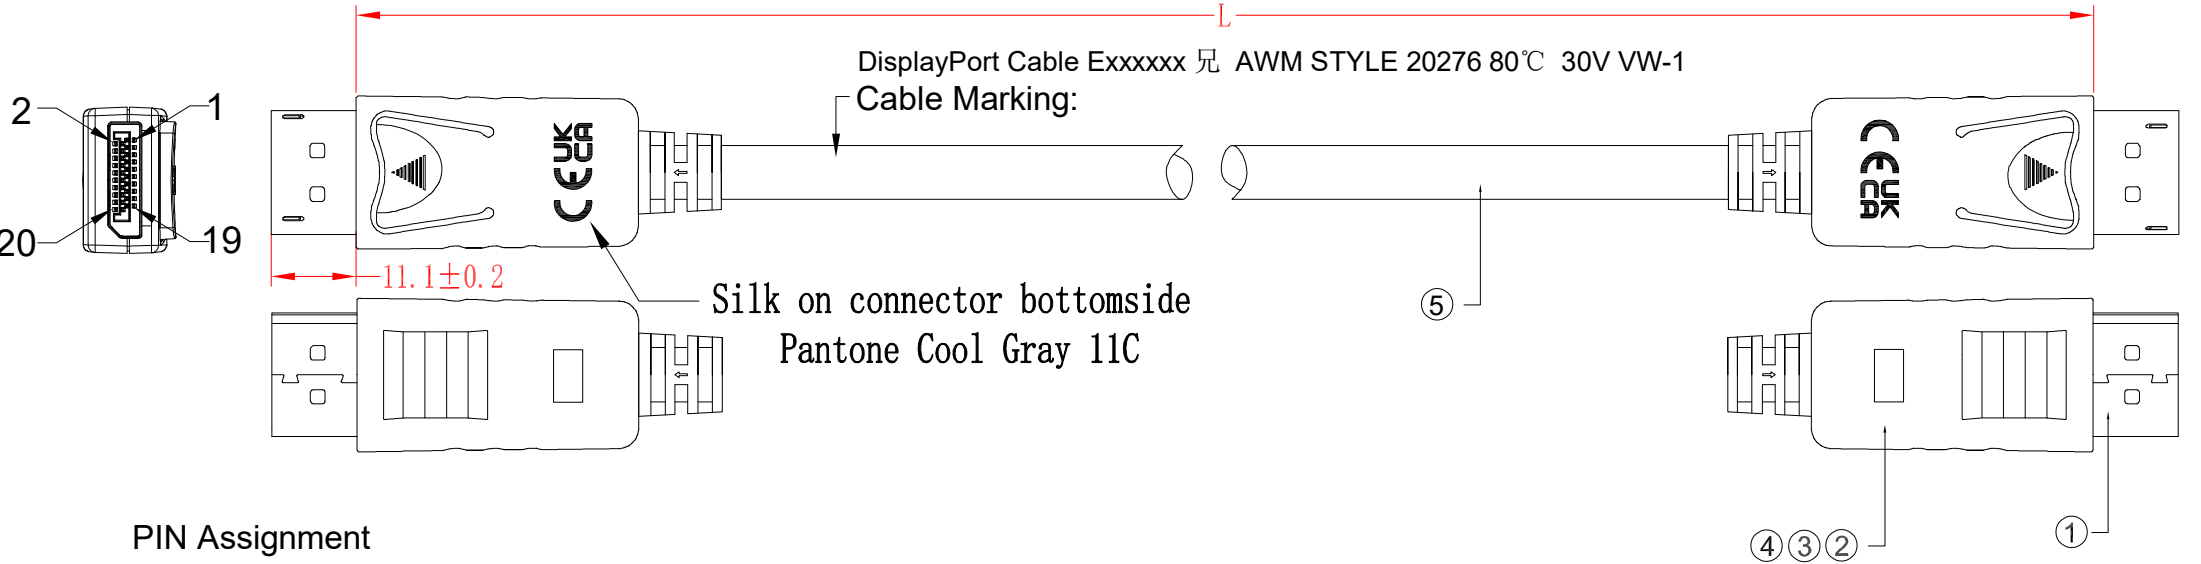

PIN Assignment

DP M

DP M

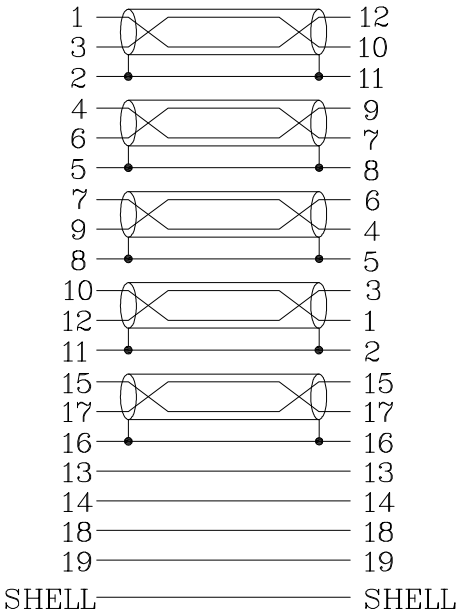

⑤	CABLE	DP1.2V 30AWG BC 30AWG BC,(1/0.254BC*1P+1/0.254TCCS+AL-foil+ADHESIVE PET)*5C+1/0.254*4C+AL-foil+144#/0.12AL-Mg Alloy Black PVC Jacket OD:6.3±0.12mm	m
④	SHELL	Black ABS SHELL	2PCS
③	MODEL	Black 45P PVC	20g
②	MODEL	PE,Nature color	10g
①	plug	DP M 20P PIN:G/F,SHELL: Gold plated	2PCS
PART NAME		DESCRIPTION	QTY

ACT				DESCRIPTION	FINISHED PRODUCT'S FIGURE	SCALE	FIT	UNITS: MM	1RD ANGLE
				MODEL NO.		△			
APPROVED	CHECKED	DRAWING	DESIGNED	DRAWING NO.		△			
				FINISHING		△			
				MATERIAL		SYM	DATE		REVISION