
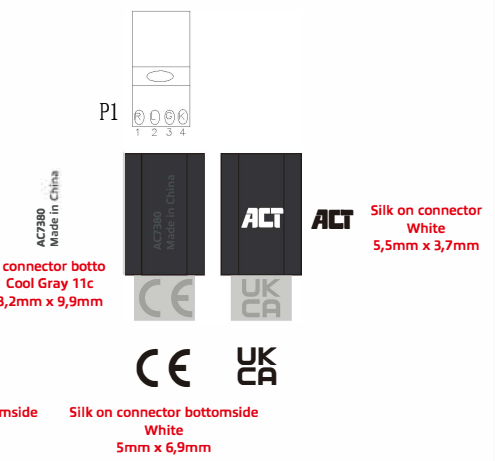
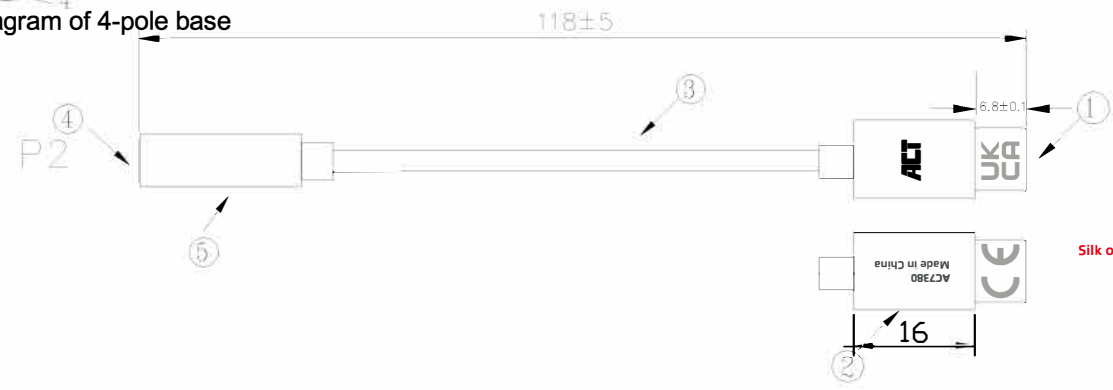


REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2021/12/03	

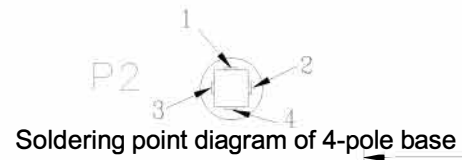

CONNECTION

P1	P2
1	1
2	2
3	3
4	4

Item No.	Length(m)
AC7380	0.11m

Remark:

- 1.Measured left channel, right channel, microphone, plus / minus tone adjustment, paused.
- 2.Swing test: Bearing capacity 200g + / - 60 degrees, 30 times / minute, after 5000 times, the product function is normal.
- 3.Weight lifting test: The plug has a load of 20N, the load-bearing time is 1 minute, and the appearance and function of the product are normal.
- 4.Plug test: 15 times / min, 3000 times, normal product function.

ITEM	DESCRIPTIONS & SPECIFICATIONS	QTY	REMARK
⑦	External Mold Exterrnal Mould, 85A, Black	1PC	
⑥	Internal Mold Exterrnal Mould, TPE 63D, Black	1PC	
⑤	Plastic Shell 23.2x φ 7.5mm,Black	1PC	
④	Connector 3.5-4pole Female, Gold-Plated	1PC	
③	Cable Varnished + Silk Wire (14/0.06mm+500D)*3C + OD:3.0mm White, L=158mm	1PC	
②	Plastic Shell Plastic Shell,16x10.3mm(4.0 hole),Black	1PC	
①	Connector GHW-POF, SPDIF, Type C/M,Nickel-Plated	1PC	

TOLERANCES UNLESS OTHERWISE STATED

X. = ±1  
X = ±0.2  
XX = ±0.1

ERP NO.:		SAMPLE DWG NO.:	
Art No.:	AC7380	REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	Type C Male to 3.5-4Pole Female	PAGE NO	1/1
		DATE	2021/12/03
APPROVAL	CHECKED	DRAWN	