

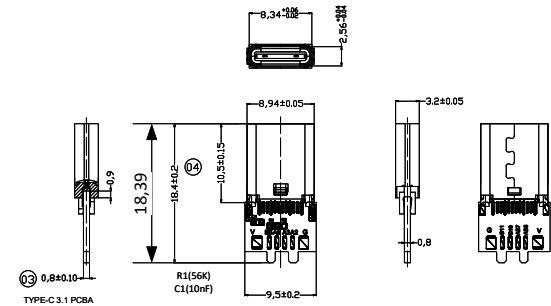


Signal Assignment

CN2(USB AM)	CN1(Type CF)
04	A1 A12 B1 B12
07	A5
01	A4 A9 B4 B9
02	A7 B7
03	A6 B6
05	B10
06	B11
08	A3
09	A2
Shell	Shell

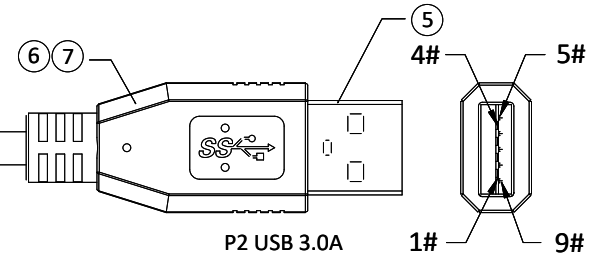

ITEM	PART	DESCRIPTION	SPEC
P1	Connector	USB Type-C female	Connector
P2	Connector	USB-A male	Connector
1	Cable Specs	Cable colour	Black
		Outer jacket	PVC
		Wire gauge	28 + 28 + 24
		Outer diameter	Ø5.5 mm
		Bend radius	30mm
2	Connector	Connector type	USB Type-C female
		Contacts	Nickel plated
		Hood	Black PVC
		E-marker	No
		USB spec	USB 3.0
3		Inner Mold	PE
4		Outer Mold	45P PVC
5	Connector	Connector type	USB-A male
		Contacts	Nickel plated
		Hood	Black PVC
		E-marker	No
		USB spec	USB 3.0
6		Inner Mold	PE
7		Outer Mold	45P PVC
Technical Specification			
		USB version	USB 3.2 Gen 1 - SuperSpeed (USB 3.0)
		Data transfer speed	5 Gbps

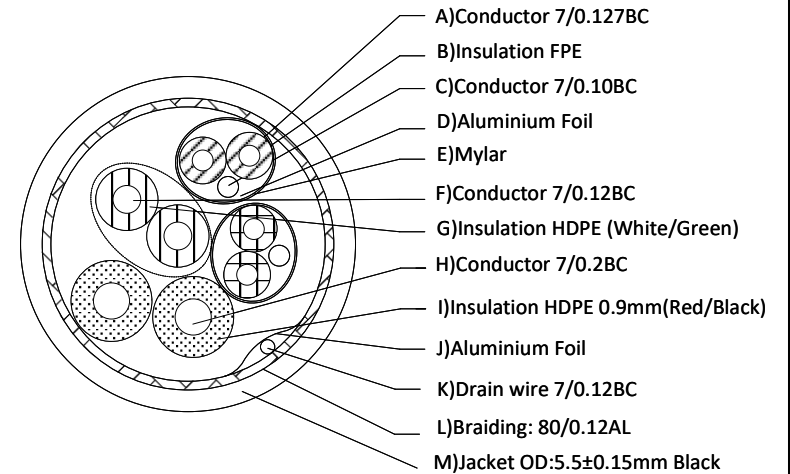

ACT

Drawn by : EP

AC7460 - USB Type-A male to USB Type-C® female adapter 0.2m

This drawing is proprietary information of ACT Connectivity Solutions and confidential and provided to you for internal use on a need to know basis only. This document may not be duplicated for or disseminated to any third party without the prior explicit written consent of ACT Connectivity Solutions. Copies of this document, Printed or electronic, are uncontrolled and intended only for immediate use.