



ACT Connectivity Solutions – Koolhovenstraat 1E – 3772MT – Barneveld – The Netherlands



ITEM	PART	DESCRIPTION
P1	USB-C male	Connector (up or down angled)
P2	USB-C male	Connector (up or down angled)
P1 + P2	Connector type	USB-C male
	Contacts	Nickel plated
	Hood	Black PVC
	E-marker	No
	Shielding	Aluminium Mylar
Cable Specs	Cable colour	Black
	Outer jacket	PVC
	Wire gauge	32, 24
	Outer diameter	Ø4.8 mm
	Bend radius	72mm
	Conductive Resistance	3 ohms MAX
USB Specs	Insulation Resistance	5M ohm MIN.
	Max. bandwidth	up to 10Gbps
	PD profiles	5, 9, 12, 15, 20 up to 3A
	Max. PD	60W
	DP-Alt mode	Yes
	Max. resolution @ 30Hz	4096 x 2160 (4K)
	Max. resolution @ 60Hz	4096 x 2160 (4K)
	Thunderbolt support	No

Item No.	Length	Max. PD
AC7476	0.5m	60W
AC7477	1m	60W
AC7478	2m	60W

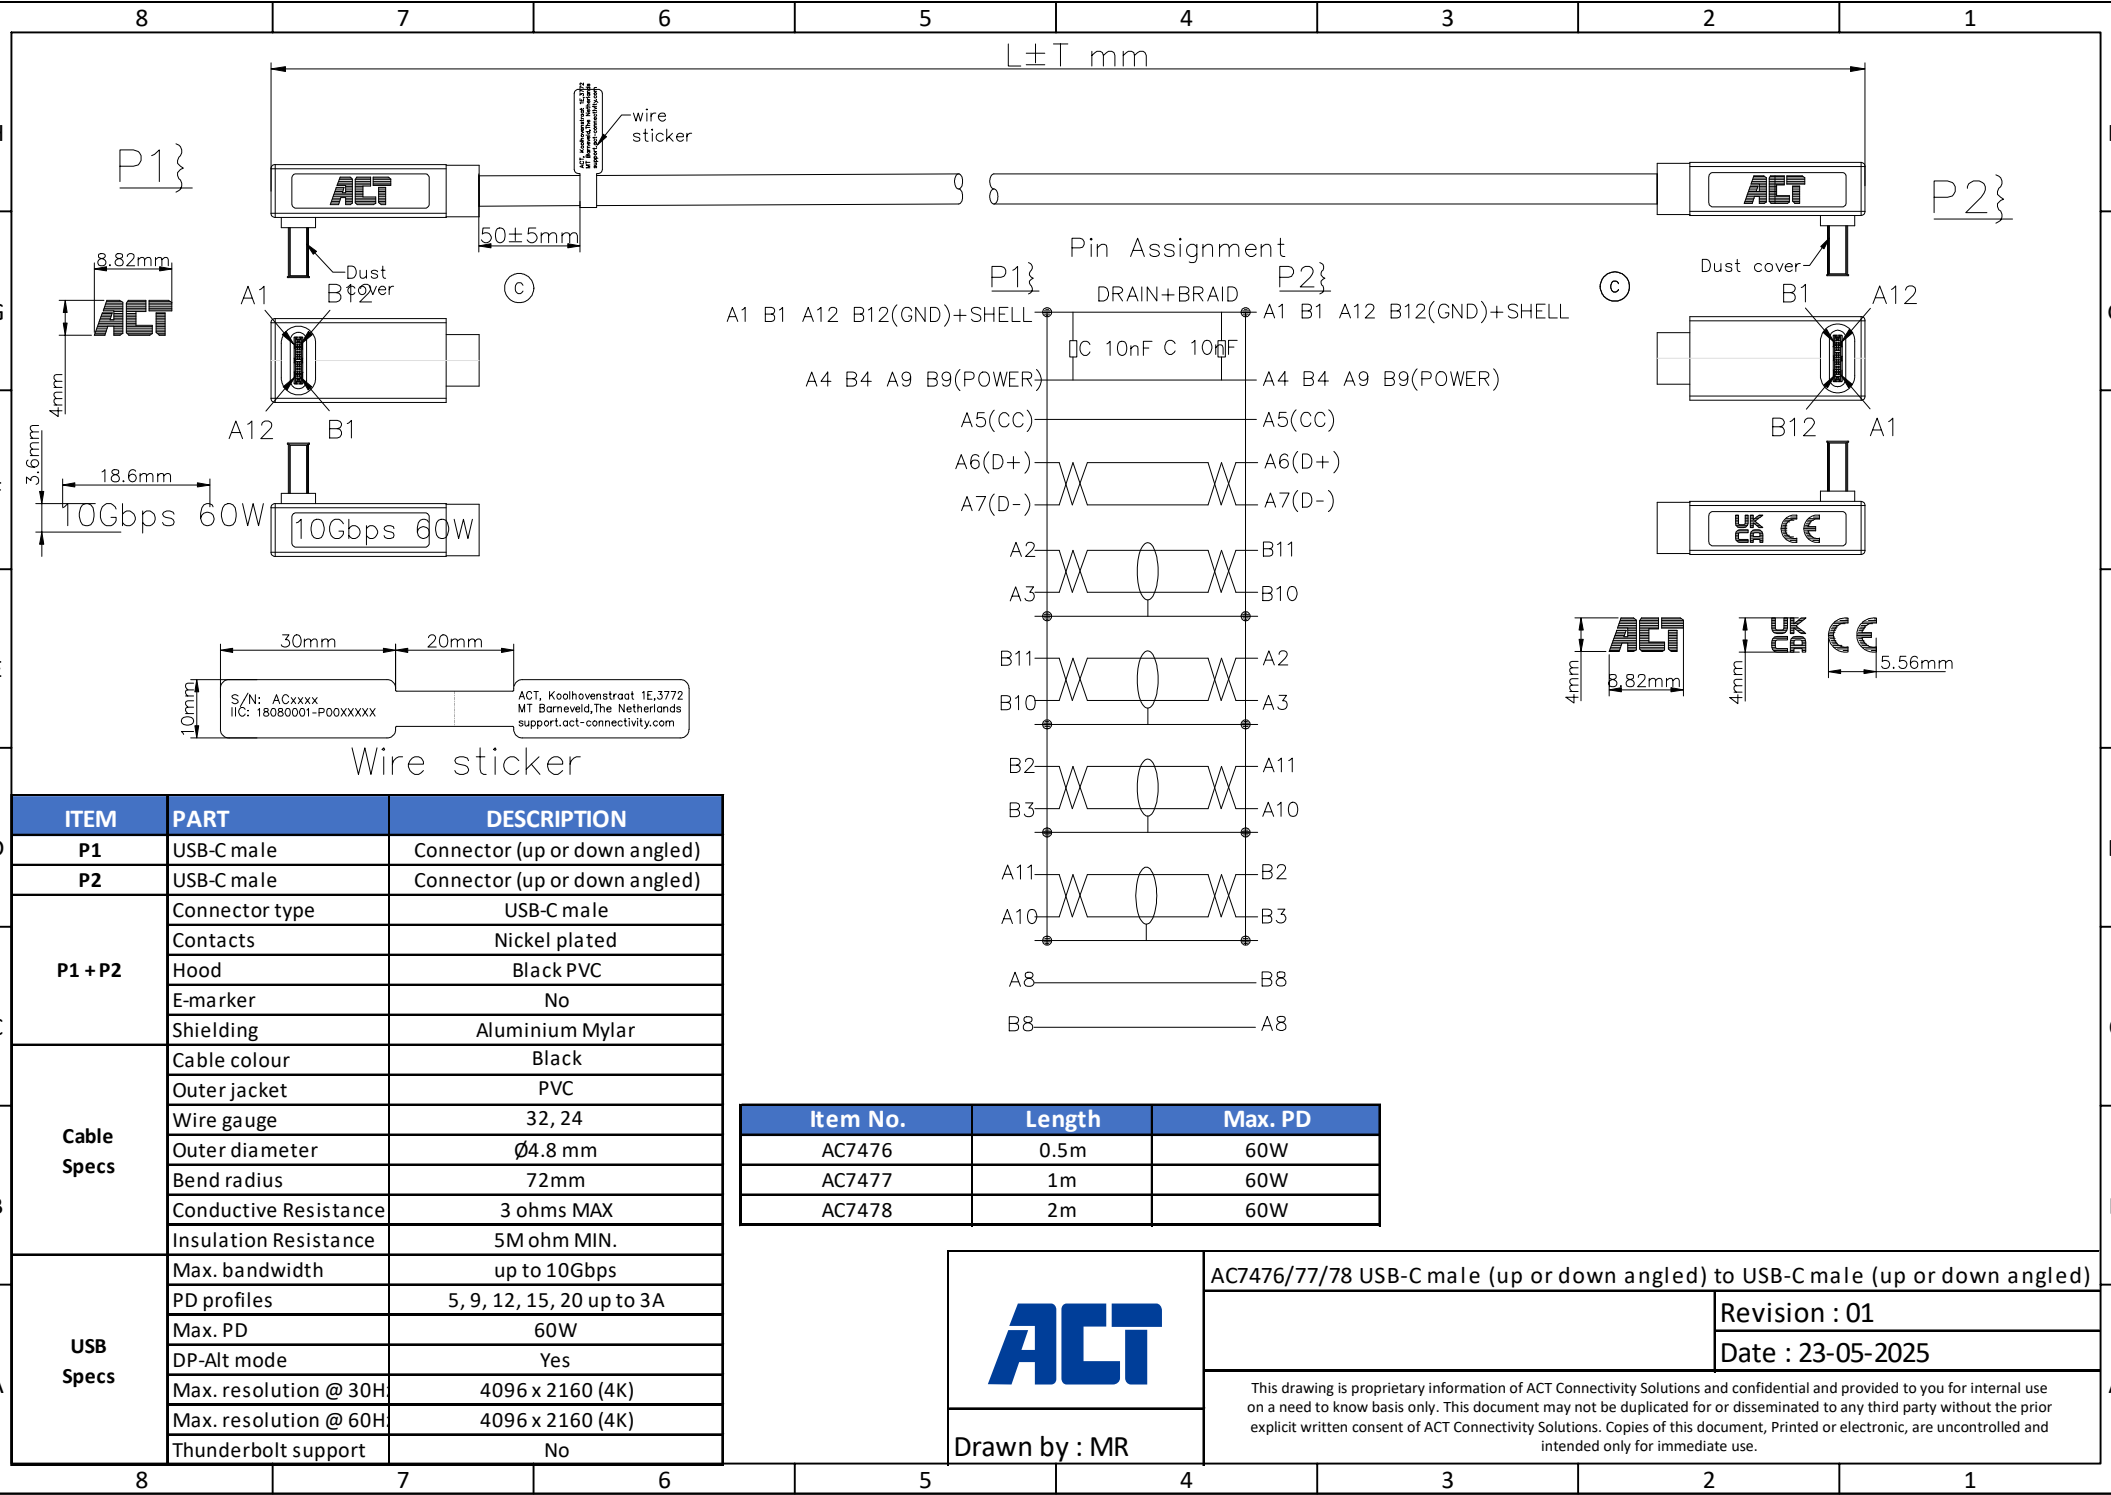

Drawn by : MR

AC7476/77/78 USB-C male (up or down angled) to USB-C male (up or down angled)

	Revision : 01
	Date : 23-05-2025

This drawing is proprietary information of ACT Connectivity Solutions and confidential and provided to you for internal use on a need to know basis only. This document may not be duplicated for or disseminated to any third party without the prior explicit written consent of ACT Connectivity Solutions. Copies of this document, Printed or electronic, are uncontrolled and intended only for immediate use.