

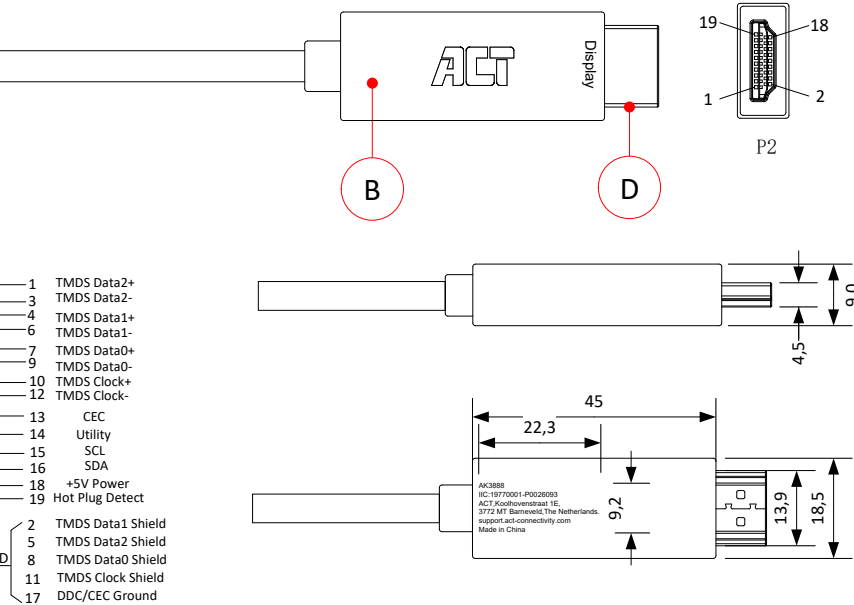



ACT Connectivity Solutions – Koolhovenstraat 1E – 3772MT – Barneveld – The Netherlands

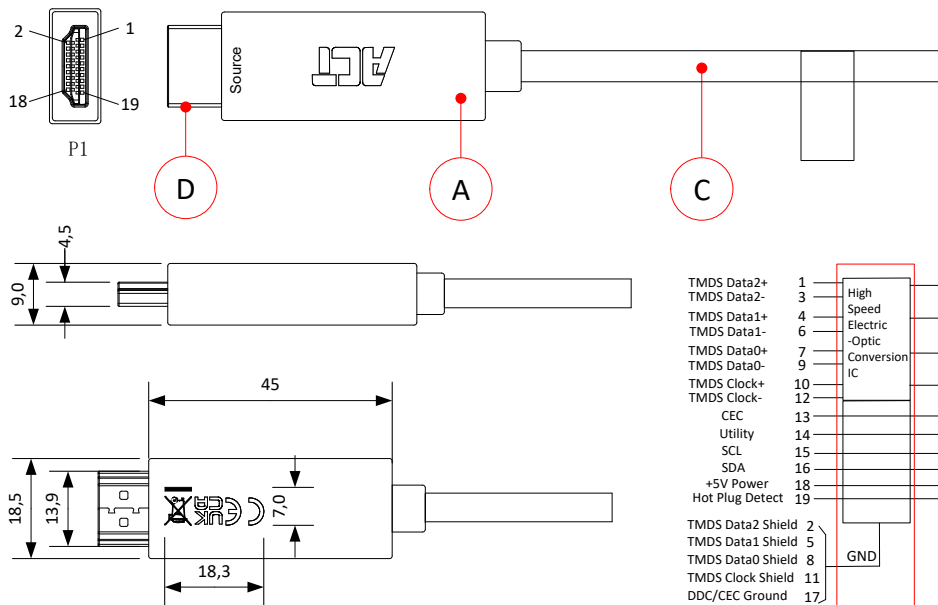

ITEM	PART	DESCRIPTION
A + B	Connector type	HDMI A male with copper-foil-wrapped module/PCBA
	Contacts	Gold plated
	Hood	Aluminum
	Shield type	Copper-braided cordage
	Conductor material	4x fiber + 7x copper
C	Cable colour	Black
	Outer jacket	LSZH
	Outer diameter	Ø4.8 ±0.2mm
	Bend radius	≥48mm
	Temperature range	0°C to +50°C (+5%)
	Humidity range	5% to 85% (non-condensing)
	Max. bandwidth	18 Gbps
	HDMI version	HDMI 2.0
	HDMI standard	Premium High Speed HDMI
	Max. resolution @ 60Hz	3840 x 2160 (4K)
	Max. resolution @ 240Hz	3840 x 2160 (4K)
	Chroma sampling	4:4:4
	Colour bit depth	24bit
D	Protective cap	PE

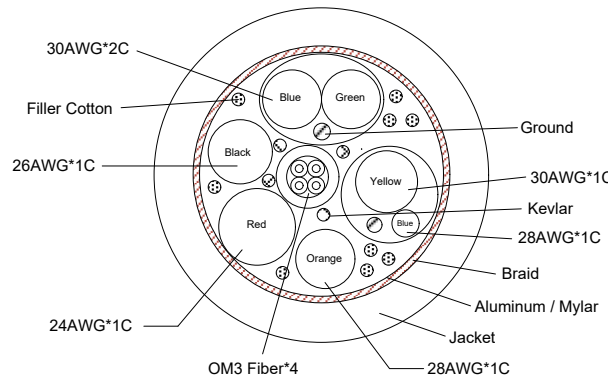

Item No.	Length
AK3888	10m
AK3889	15m
AK3890	20m
AK3891	25m
AK3892	30m
AK3893	40m
AK3894	50m
AK3895	60m
AK3896	70m
AK3897	80m
AK3898	90m
AK3899	100m



Premium High Speed HDMI LSZH AOC 4K@60Hz	
Item : AK3888~AK3899	Unit: mm
	Revision : 01-AA
	Date: 27-05-2025
This drawing is proprietary information of ACT Connectivity Solutions and confidential and provided to you for internal use on a need to know basis only. This document may not be duplicated for or disseminated to any third party without the prior explicit written consent of ACT Connectivity Solutions. Copies of this document, Printed or electronic, are uncontrolled and intended only for immediate use.	

Drawn by : EP