


KVM Extender

6.1

KVM Extender
Extension systems to bridge IT distances

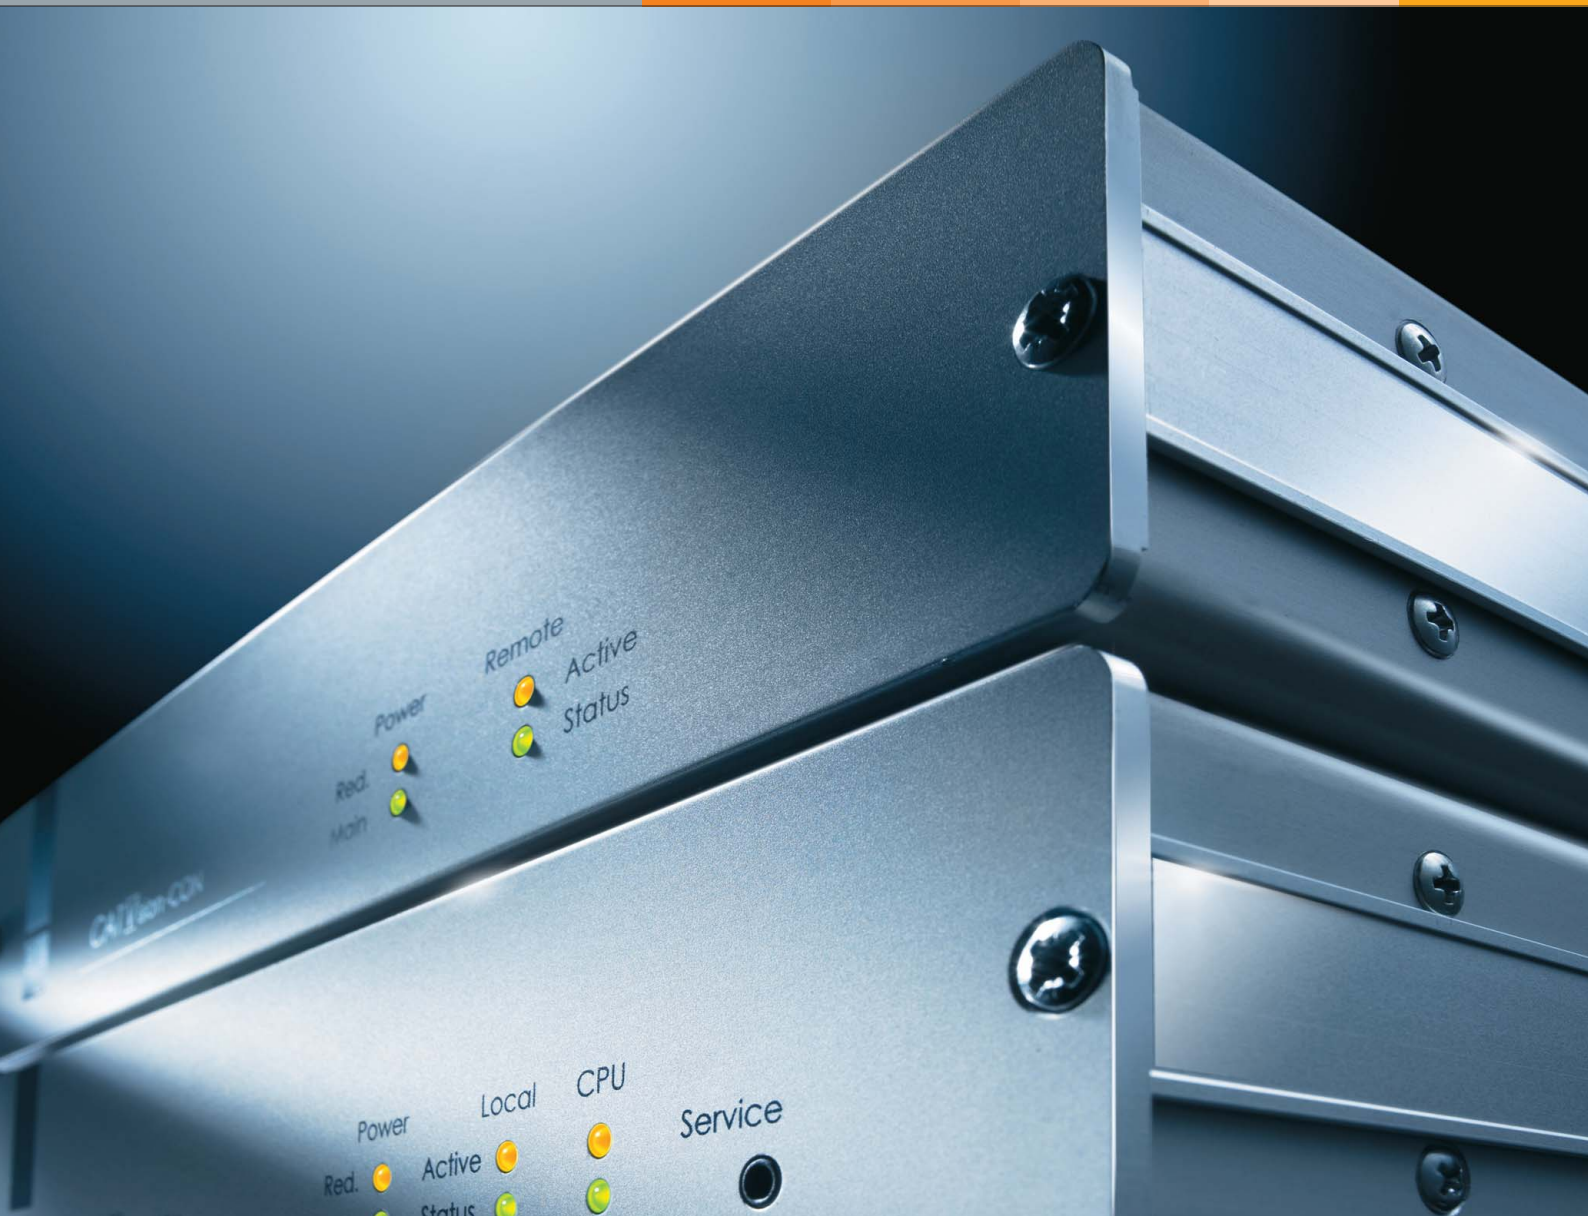

Guntermann & Drunck GmbH
Dortmunder Straße 4a
D-57234 Wilnsdorf, Germany

Telephone +49 (0) 2739 8901-100
Fax +49 (0) 2739 8901-120

sales@GDsys.de
www.GDsys.de

Intelligent solutions

Guntermann & Drunck GmbH was founded in 1985 by the people that gave the company its name.

Over 20 years have since past, and we are now a leading manufacturer of analogue and digital KVM switching systems.

As an owner-managed company we work closely with the marketplace and take our decisions with and in the interests of our customers. It is our philosophy to meet our customers en route to making decisions, to accompany them in the process and ensure that they achieve their goals.

We can do this because as a medium-sized company, we have short communication paths and also have all core competencies available in-house – from development through to production. This way we can even make the impossible possible at times. Whether this is thanks to the modularity of the products or by implementing a customised solution. We orient ourselves towards the needs of the customer – and not the other way round.

Organisations, service providers and companies of all sizes in the management of numerous computers, servers and other network devices trust the comprehensive advice and service provided by Guntermann & Drunck GmbH.

Thanks to these different fields of specialisation, the demands placed on the products are many and varied. They need to offer a long service life, and have to be secure, uncomplicated, user-friendly, understandable and adaptable.

Contents

DVIVision	System		6
	Equipment features		10
	Extension		11
	Variants	Single-channel	12
		Multi-channel	14
	Order list		18
CATVision	System		22
	Equipment features		26
	Extension		27
	Variants	Single-channel	28
		Multi-channel	30
	Order list		37
LwLVision	System		42
	Equipment features		46
	Variants	Single-channel	48
		Multi-channel	50
	Order list		53
RS232 Extender	System		56
	Order list		58
USB Extender	System		59
	Order list		62
AudioTransceiver	System		63
	Order list		65
VideoSplitter 2plus	System		66
	Order list		68
FireWire-800 Transceiver	System		69
	Order list		70

Taric Code

Devices: 8 5 1 7 6 2 0 0

Cables: 8 5 4 4 2 0 0 0

Waste Electrical and
Electronic Equipment

WEEE register no. DE 3 0 7 6 3 2 4 0

KVM Extenders are used to extend the access to your computer or server for one or 2 concurrent workstations. In principle, the systems consist of two main components: the computer modules (computer / server link) and the remote workstation modules (link to the user peripherals).

The KVM Extenders extend the computer signals:

Digital video/analogue video • Keyboard/mouse PS/2 and USB • Transparent USB 1.1 or USB 2.0 • RS232 • Audio • and FireWire

Depending on the product and application, different signals are bundled together – from one single signal extension for audio through to 4-way video/audio/RS232/USB1.1 and keyboard/mouse in one product.

Depending on the signal being extended and the transmission medium being used, distances of 50 - 10,000 metres can be bridged. The transmission paths are similar in character to a dedicated 1:1 link.

Multi-Signal KVM Extenders

● DVIVision

- Digital video, keyboard/mouse PS/2 and USB, USB 1.1 transparent, audio, RS232
- CAT-x cable
- Up to 140 metres

● CATVision

- Analogue video, keyboard/mouse PS/2 and USB, USB 1.1 transparent, audio, RS232
- CAT-x cable
- Up to 300 metres (USB 1.1 reduced to 100 m)

● LwLVision

- Analogue + digital video, keyboard/mouse PS/2 and USB, USB 1.1 transparent, audio, RS232
- 2 optic fibres
- Up to 10,000 metres (USB 1.1 reduced to 2000 m)

Multi-Channel-Video KVM Extender

- **DVIVision-MC** as for DVIVision, but with up to 3 digital video channels per system
- **CATVision-MC** as for CATVision, but with up to 4 analogue video channels per system
- **LwLVision-MC** as for LwLVision, but with up to 2 digital / analogue video channels per system

Single-Signal KVM Extender

- | | |
|-----------------------------------|---|
| ● USB 1.1 Extender | USB 1.1 signals up to 100 metres via CAT-x cable |
| ● USB 2.0 Extender | USB 2.0 signals up to 50 metres via CAT-x cable |
| ● AudioTransceiver | Stereo audio up to 600 metres via CAT-x cable |
| ● FireWire-800 Transceiver | IEEE1394b signals up to 500 metres via 2 optical fibres |
| ● RS232 Extender | RS232 data up to 400 metres via CAT-x cable |
| ● VS2plus | Analogue video up to 110 metres via multi-coaxial cable |

Applications

Our customers use these products in the fields of control rooms, digital signage, mobile and stationary radio technology as well as process control, just to give a few examples.

Flexibility

Due to the variety of signals in the IT sector and the corresponding incoming connection options, the products cannot support all types. To be able to offer a wide range despite this, we have the appropriate converters and adapters which can integrate even the "exotic ones" into your KVM solution. Speak to us.

Combinability

Virtually all products in our range can be combined with one another. If you are setting up a complex system or if the performance of a product is not sufficient for your specific application, our sales team will be pleased to advise you on the relevant combined solutions to achieve your overall functionality.

KVM Extender

The DVIVision system forms part of the KVM Extender group and extends keyboard, digital video, mouse, audio, RS232 and transparent USB 1.1 signals via CAT-x cable up to 140 m. The multi-channel variants can transmit 2 or 3 video channels.

The system consists of two main components; the computer module (transmitter) and the workstation module (receiver). The modules are interconnected via CAT-x cable. The system facilitates the operation of a computer via 2 concurrent (1 x transmitter-side, 1 x receiver-side) workstations.

Highlights

- Resolution up to 1920 x 1200 @ 60Hz
- Max. transmission length up to 140 m via CAT-x cable
- PS/2 and USB keyboard/mouse support
- 24 Bit colour depth
- E-DDC support
- Redundant power supply (optional)
- Optional equipment features: Audio, RS232 (data and handshake), USB 1.1 (transparent, high power)
- Multi-channel variants for up to 3 video transmissions
- Local workstation included in the modules as standard
- Integrated power pack
- Suitable for all operating systems

Computer module DVIVision MC3-ARU-CPU

The DVIVision computer modules transmit the following signals as standard:

- 1 x digital video and
- 1 x PS/2 or USB keyboard/mouse

The computer modules are available in variants with up to 3 video channels.

Each of these variants is also available with the following equipment features as an option:

- Audio + transparent RS232 (only in combination)
- Transparent USB 1.1

Article no.
A131 0028



Front view

Workstation module DVIVision MC3-ARU-CON

As computer and workstation modules are fundamentally compatible, the workstation modules DVIVision-CON also transmit the following signals as standard:

- 1 x digital video and
- 1 x PS/2 or USB keyboard/mouse

The workstation modules are available in the same variants and with the same optional equipment features.

Article no.
A132 0018



Front view



LEGEND

Abbreviations:

CPU	=	Computer module
CON	=	Workstation module
AR	=	Audio + RS232
U	=	Transparent USB 1.1
RM	=	For assembly in a 19" rack

Equipment features:

 = Digital video	 = Power
 = Audio	 = Desktop
 = RS232	 = Rackmount
 = USB	

Note:

To ensure that the computer and workstation modules are compatible, please check that functional features (letters "ARU") are identical on both modules.

Example:

DVIVision-ARU-CPU + DVIVision-ARU-CON = OK
 DVIVision-ARU-CPU + DVIVision-U-CON = not OK

A wealth of variants thanks to the modular design, e.g. DVIVision-MC3-ARU-CPU

Their modularity enables DVIVision systems to be customised individually to your requirements. The legend opposite shows which equipment options are available to you for your application.

Configure your DVIVision systems according to your requirements – naturally either as desktop or rackmount versions.

Operating the main components

The system itself needs no explicit operation.

The switching between the two workstations is carried out automatically via keyboard or mouse inputs.

Operation

KVM Extender

System features

Workstation per system	2 (concurrent)
Number of monitors/workstation	1 to 3
Computers per system	1
Signal type/video	digital video
Analogue resolution (only connection to workstations)	up to 1920 x 1200 @ 60 Hz
Digital resolution	from 640 x 480 @ 100 Hz to 1920 x 1200 @ 60 Hz
Digital colour mode	24 Bit
Transmission type	
Computer module – workstation module	dedicated CAT-x link
Transmission length (max.)	
Computer module – workstation module	140 m (depending on cable)
Transmission cable type	CAT-x cable
Update process	local service socket
Operation environment	
Temperature	+5 to +45 °C
Air humidity	20 – 80 %, non-condensing
Conformity	CE, RoHS

x = 5e, 6, 7

System hardware

The design of the system hardware offers a range of advantages in use, and here are just a few of those benefits as an illustration.


Area:

Video	Resolutions up to 1920 x 1200 @ 60 Hz can be selected Forwarding and saving of enhanced DDC info between remote monitor and computer
Connection	Computer hot plug: Computer and system modules can be connected during operation Stay-alive: When switching off the extender the computer remains unaffected
Expansion	Thanks to the different types of signal, the variants always provide the right transmission solution Remote power switching with "DVI Power" add-on component



System diagram

- 1 DVIVision-MC2-ARU-CPU
- 2 DVIVision-MC2-ARU-CON

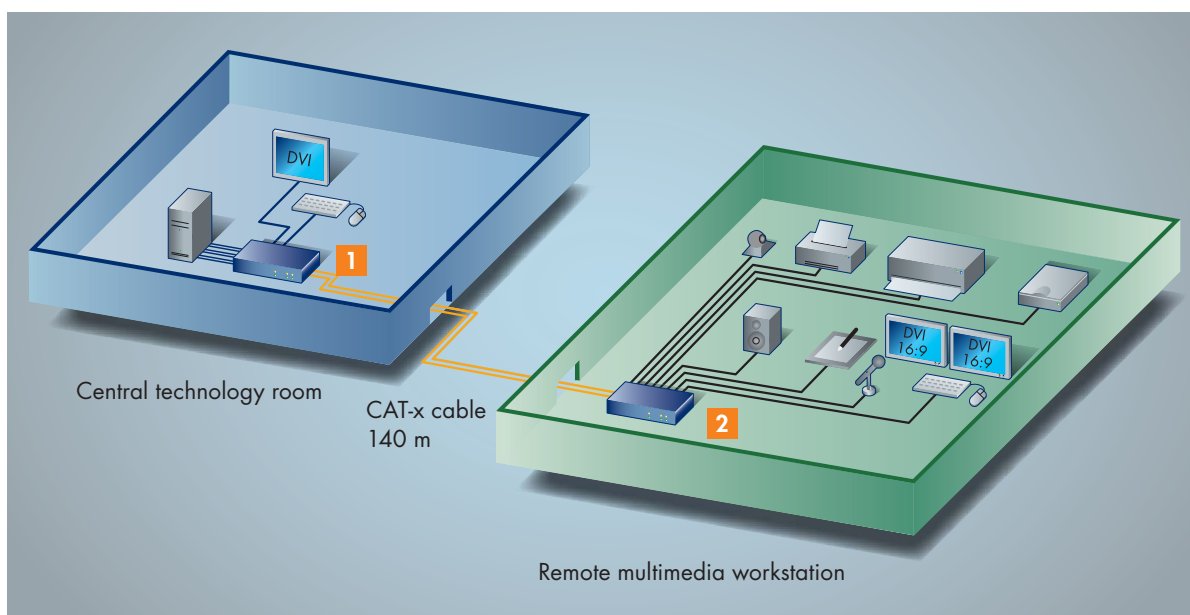

Example: Multimedia workstation

The multimedia computer is positioned in an air-conditioned, sound-proofed technology room. For maintenance purposes the computer can be accessed in the technology room via the connected boot monitor.

The DVIVision extends the signals 2-way digital video, RS232, audio and USB 1.1 via 140 m CAT-x cable to the remote workstation.

The operator has up to 4 USB devices available; a serial graphics panel, bidirectional audio signals in the form of microphone and loudspeaker as well as two digital 16:9 graphics displays.

The workstation is not affected by fan noise or heat developing from the computer. Optimum access to the computer is provided in the technology room.

KVM Extender

Equipment

Every DVIVision system can be ordered with the following equipment features as an option.

- Audio and RS232 (only in combination)
- Transparent USB 1.1

The equipment features given make up the corresponding equipment of a DVIVision device.

These can also be retrofitted at the factory on request.

Audio-RS232



Component for transmitting audio and transparent RS232 signals

Technical data		Computer module DVIVision CPU	Workstation module DVIVision CON
Interfaces and specifications			
for workstation	audio	–	2 x 3.5 mm jack (speaker, micro in)
	RS232	–	1 x D-sub 9 plug
to computer	Audio	2 x 3.5 mm jack (line in, line out)	–
	RS232	1 x D-sub 9 socket	–
Transmission	Additional CAT-x cable	no	no
Design		internal	
Audio specification	Resolution	24-bit digital	
	Sampling rate	96 kHz	
	Bandwidth	22 kHz	
	Microphone preamplification	20 dB	
RS232 specification	Transmission rate	max. 115,200 bit/s	
	Signals transmitted	RxD, TxD, RTS, CTS, DTR, DSR, DCD	

Transparent USB 1.1



Component for transmitting transparent USB 1.1 signals

Technical data		Computer module DVIVision CPU	Workstation module DVIVision CON
Interfaces and specifications			
for workstation		–	4 x USB-A socket
	to computer	1 x USB-B socket (both for keyboard/mouse)	–
Transmission	Additional CAT-x cable	no	
Design		internal	
USB specifications		transparent USB 1.1	
	Transmission length	up to 140 m	
	Support	High power devices up to 500 mA	
	USB transmission rate	up to 12 Mbit/s	

x = 5e, 6, 7

Expansion DVI Power



This component can be retrofitted at the factory on request.

The component "DVI Power" permits the computer to be switched on and off remotely (reset and ATX power switching). To do this, a slot card is inserted into the computer to be controlled and connected to the computer module.

On the remote workstation there is corresponding operating hardware from the customer (button, etc.) which is connected to the workstation module.

The function is normally available for all DVIVision variants. The prerequisite for "DVI-Power" is a "Audio-RS232" component being fitted. For more details, please contact our sales team.

Technical data		Computer module DVIVision CPU	Workstation module DVIVision CON
Interfaces and specifications	for workstation	–	RJ9 socket (modular 4/4)
	to computer	RJ9 socket (modular 4/4)	–
	Transmission Additional CAT-x cable	no	

x = 5e, 6, 7

KVM Extender

1. Single-channel (1 x video)

**DVIVision
ARU-CPU**
Computer module

Article no.
A111 0071



Rear view

**DVIVision
ARU-CON**
Workstation module

Article no.
A112 0069



Rear view

The DVIVision single-channel is also available as a **twin variant**.
It combines two computer or workstation modules in a 19" height module.
This provides a space-saving way of operating two computers remotely.

Individual features of the modules

Technical data			Computer module DVIVision-CPU	Workstation module DVIVision-CON
Power supply	Main	Type	internal power pack	internal power pack
		Connection	1 x inlet connector for non-heating devices (IEC-320 C14)	1 x inlet connector for non-heating devices (IEC-320 C14)
		Power supply	AC100-240V/60-50Hz 0.4-0.2A	AC100-240V/60-50Hz 0.4-0.2A
	Redundant (optional)	Type	external power pack	external power pack
		Connection	mini-DIN 4 Power socket	mini-DIN 4 Power socket
		Power supply	+12VDC/1.2A	+12VDC/1.2A
Casing	Material	anodised aluminium	anodised aluminium	
	Dimensions (W x H x D)	Desktop	210 x 44 x 210 mm	210 x 44 x 210 mm
		Rackmount	19" x 1 HU x 210 mm	19" x 1 HU x 210 mm
Weight			approx. 1.2 kg	approx. 1.2 kg
Interfaces				
for workstation	Monitor	Keyboard/mouse	1 x DVI-I socket	1 x DVI-I socket
		USB keyboard/mouse	2 x mini-DIN 6 socket	2 x mini-DIN 6 socket
		USB keyboard/mouse	–	2 x USB-A socket
to computer	Keyboard/mouse CPU	Keyboard/mouse CPU	2 x mini-DIN 6 socket	–
		Video CPU	1 x DVI-D socket	–
		USB keyboard/mouse CPU	1 x USB-B socket	–
for transmission	Computer module – workstation module	Computer module – workstation module	1 x RJ45 socket	1 x RJ45 socket
		No. of CAT-x cables from		
		Computer module – workstation module	1	1
for updates			1 x 2.5 mm jack	1 x 2.5 mm jack

x = 5e, 6, 7

KVM Extender

2. Multi-channel 2 (2 x video)

DVIVision
MC2-ARU-CPU
Computer module



Article no.
A121 0060



Rear view

DVIVision
MC2-ARU-CON
Workstation module



Article no.
A122 0041



Rear view

Individual features of the modules

Technical data			Computer module DVIVision-MC2-CPU	Workstation module DVIVision-MC2-CON
Power supply	Main	Type	internal power pack	internal power pack
		Connection	1 x inlet connector for non-heating devices (IEC-320 C14)	1 x inlet connector for non-heating devices (IEC-320 C14)
		Power supply	AC100-240V/60-50Hz 0.4-0.3A	AC100-240V/60-50Hz 0.4-0.2A
	Redundant (optional)	Type	external power pack	external power pack
		Connection	mini-DIN 4 Power socket	mini-DIN 4 Power socket
		Power supply	+12VDC/1.7A	+12VDC/1.5A
Casing	Material	anodised aluminium	anodised aluminium	
	Dimensions (W x H x D)	Desktop	435 x 44 x 210 mm	435 x 44 x 210 mm
		Rackmount	19" x 1 HU x 210 mm	19" x 1 HU x 210 mm
Weight			approx. 3 kg	approx. 3 kg
Interfaces				
for workstation	Monitor	Keyboard/mouse	2 x DVI-I socket	2 x DVI-I socket
		USB keyboard/mouse	2 x mini-DIN 6 socket	2 x mini-DIN 6 socket
		USB keyboard/mouse	–	2 x USB-A socket
to computer	Keyboard/mouse CPU	Keyboard/mouse CPU	2 x mini-DIN 6 socket	–
		Video CPU	2 x DVI-D socket	–
		USB keyboard/mouse CPU	1 x USB-B socket	–
for transmission	Computer module – workstation module	Computer module – workstation module	2 x RJ45 socket	2 x RJ45 socket
		No. of CAT-x cables from		
		Computer module – workstation module	2	2
for updates			1 x 2.5 mm jack	1 x 2.5 mm jack

x = 5e, 6, 7

KVM Extender

3. Multi-channel 3 (3 x video)

DVIVision MC3-ARU-CPU Computer module

Article no.
A131 0028



Rear view

DVIVision MC3-ARU-CON Workstation module

Article no.
A132 0018



Rear view

Individual features of the modules

Technical data			Computer module DVIVision-MC3 CPU	Workstation module DVIVision-MC3 CON
Power supply	Main	Type	internal power pack	internal power pack
		Connection	1 x inlet connector for non-heating devices (IEC-320 C14)	1 x inlet connector for non-heating devices (IEC-320 C14)
		Power supply	AC100-240V/60-50Hz 0.7-0.3A	AC100-240V/60-50Hz 0.6-0.3A
	Redundant (optional)	Type	external power pack	external power pack
		Connection	mini-DIN 4 Power socket	mini-DIN 4 Power socket
		Power supply	+12VDC/2.4A	+12VDC/2.0A
Casing	Material	anodised aluminium	anodised aluminium	
	Dimensions (W x H x D)	Desktop	435 x 44 x 210 mm	435 x 44 x 210 mm
		Rackmount	19" x 1 HU x 210 mm	19" x 1 HU x 210 mm
Weight			approx. 3.2 kg	approx. 3.1 kg
Interfaces				
for workstation	Monitor	Keyboard/mouse	2 x mini-DIN 6 socket	2 x mini-DIN 6 socket
		USB keyboard/mouse	–	2 x USB-A socket
		Keyboard/mouse CPU	2 x mini-DIN 6 socket	–
to computer	Video CPU	USB keyboard/mouse CPU	3 x DVI-D socket	–
		USB keyboard/mouse CPU	1 x USB-B socket	–
		Computer module – workstation module	3 x RJ45 socket	3 x RJ45 socket
for transmission	No. of CAT-x cables from Computer module – workstation module			
for updates				

x = 5e, 6, 7

KVM Extender

1. Single-channel (1 x video)

Computer modules



Art. no.	Designation	Audio RS232	transp. USB 1.1	Desktop	Rackmount
A111 0063	DVIVision-CPU			●	
A111 0064	DVIVision-CPU-RM				●
A111 0069	DVIVision-AR-CPU	●		●	
A111 0070	DVIVision-AR-CPU-RM	●			●
A111 0065	DVIVision-U-CPU		●	●	
A111 0066	DVIVision-U-CPU-RM		●		●
A111 0071	DVIVision-ARU-CPU	●	●	●	
A111 0072	DVIVision-ARU-CPU-RM	●	●		●
A111 0067	Twin-DVIVision-CPU			●	●*1
A111 0073	Twin-DVIVision-AR-CPU	●		●	●*1
A111 0068	Twin-DVIVision-U-CPU		●	●	●*1
A111 0074	Twin-DVIVision-ARU-CPU	●	●	●	●*1

Workstation modules



Art. no.	Designation	Audio RS232	transp. USB 1.1	Desktop	Rackmount
A112 0049	DVIVision-CON			●	
A112 0050	DVIVision-CON-RM				●
A112 0067	DVIVision-AR-CON	●		●	
A112 0068	DVIVision-AR-CON-RM	●			●
A112 0051	DVIVision-U-CON		●	●	
A112 0052	DVIVision-U-CON-RM		●		●
A112 0069	DVIVision-ARU-CON	●	●	●	
A112 0070	DVIVision-ARU-CON-RM	●	●		●
A112 0053	Twin-DVIVision-CON			●	●*1
A112 0071	Twin-DVIVision-AR-CON	●		●	●*1
A112 0054	Twin-DVIVision-U-CON		●	●	●*1
A112 0072	Twin-DVIVision-ARU-CON	●	●	●	●*1

*1 Devices with rackmount kits can be installed at the front or rear of the rack

2. Multi-channel 2 (2 x video)

To ensure that the computer module and workstation module match, please check that the functional features (letters "ARU") are identical for both modules.

Computer modules



Art. no.	Designation	Audio RS232	transp. USB 1.1	Desktop	Rackmount
A121 0053	DVIVision-MC2-CPU			●	● *1
A121 0058	DVIVision-MC2-AR-CPU	●		●	● *1
A121 0055	DVIVision-MC2-U-CPU		●	●	● *1
A121 0060	DVIVision-MC2-ARU-CPU	●	●	●	● *1

Workstation modules



Art. no.	Designation	Audio RS232	transp. USB 1.1	Desktop	Rackmount
A122 0034	DVIVision-MC2-CON			●	● *1
A122 0039	DVIVision-MC2-AR-CON	●		●	● *1
A122 0036	DVIVision-MC2-U-CON		●	●	● *1
A122 0041	DVIVision-MC2-ARU-CON	●	●	●	● *1

*1 Devices with rackmount kits can be installed at the front or rear of the rack

NOTE

The abbreviations, such as CPU and others, are explained in more detail on page 7.

When ordering, please quote the article number and designation.

KVM Extender

3. Multi-channel 3 (3 x video)

To ensure that the computer module and workstation module match, please check that the functional features (letters "ARU") are identical for both modules.

Computer modules



Art. no.	Designation	Audio RS232	transp. USB 1.1	Desktop	Rackmount
A131 0025	DVIVision-MC3-CPU			●	● *1
A131 0026	DVIVision-MC3-AR-CPU	●		●	● *1
A131 0027	DVIVision-MC3-U-CPU		●	●	● *1
A131 0028	DVIVision-MC3-ARU-CPU	●	●	●	● *1

Workstation modules



Art. no.	Designation	Audio RS232	transp. USB 1.1	Desktop	Rackmount
A132 0015	DVIVision-MC3-CON			●	● *1
A132 0016	DVIVision-MC3-AR-CON	●		●	● *1
A132 0017	DVIVision-MC3-U-CON		●	●	● *1
A132 0018	DVIVision-MC3-ARU-CON	●	●	●	● *1

*1 Devices with rackmount kits can be installed at the front or rear of the rack

Connectivity

According to the equipment features selected, the computer connection cables are included, length 2 m. Power supply cable and power packs are included as standard, redundant power supply always needs to be ordered separately. Alternative lengths are available and are priced to order.

Art. no.	Designation	Category in KVM Connectivity	Function
see KVM Connectivity	DVI-D-SL-M/M-x	Video cables	computer connection
	RS232-M/F-x	Serial cables	computer connection
	Audio-M/M-x	Audio cables	computer connection
	USB-AM/BM-x	USB cables	computer connection
	PS/2-M/M purple-x	Keyboard/mouse cables	computer connection
	PS/2-M/M green-x	Keyboard/mouse cables	computer connection
	ADAPTER DVI-I-HD15F	Adapters (passive)	adapter for comp. connect.
	K-C5/HR-x	Ready-made cables	transmission up to 100 m
	K-C7/LD-x	Ready-made cables	transmission over 100 m

x = length in metres, see KVM Connectivity for lengths available.

Expansion DVI Power


Art. no.	Designation
A180 0003	DVI-Power-CPU
A180 0004	DVI-Power-CON

Accessories

Art. no.	Designation
A411 0008	Power-Set 12-Type 2

x = 5e, 6, 7

When ordering, please quote the article number and designation.

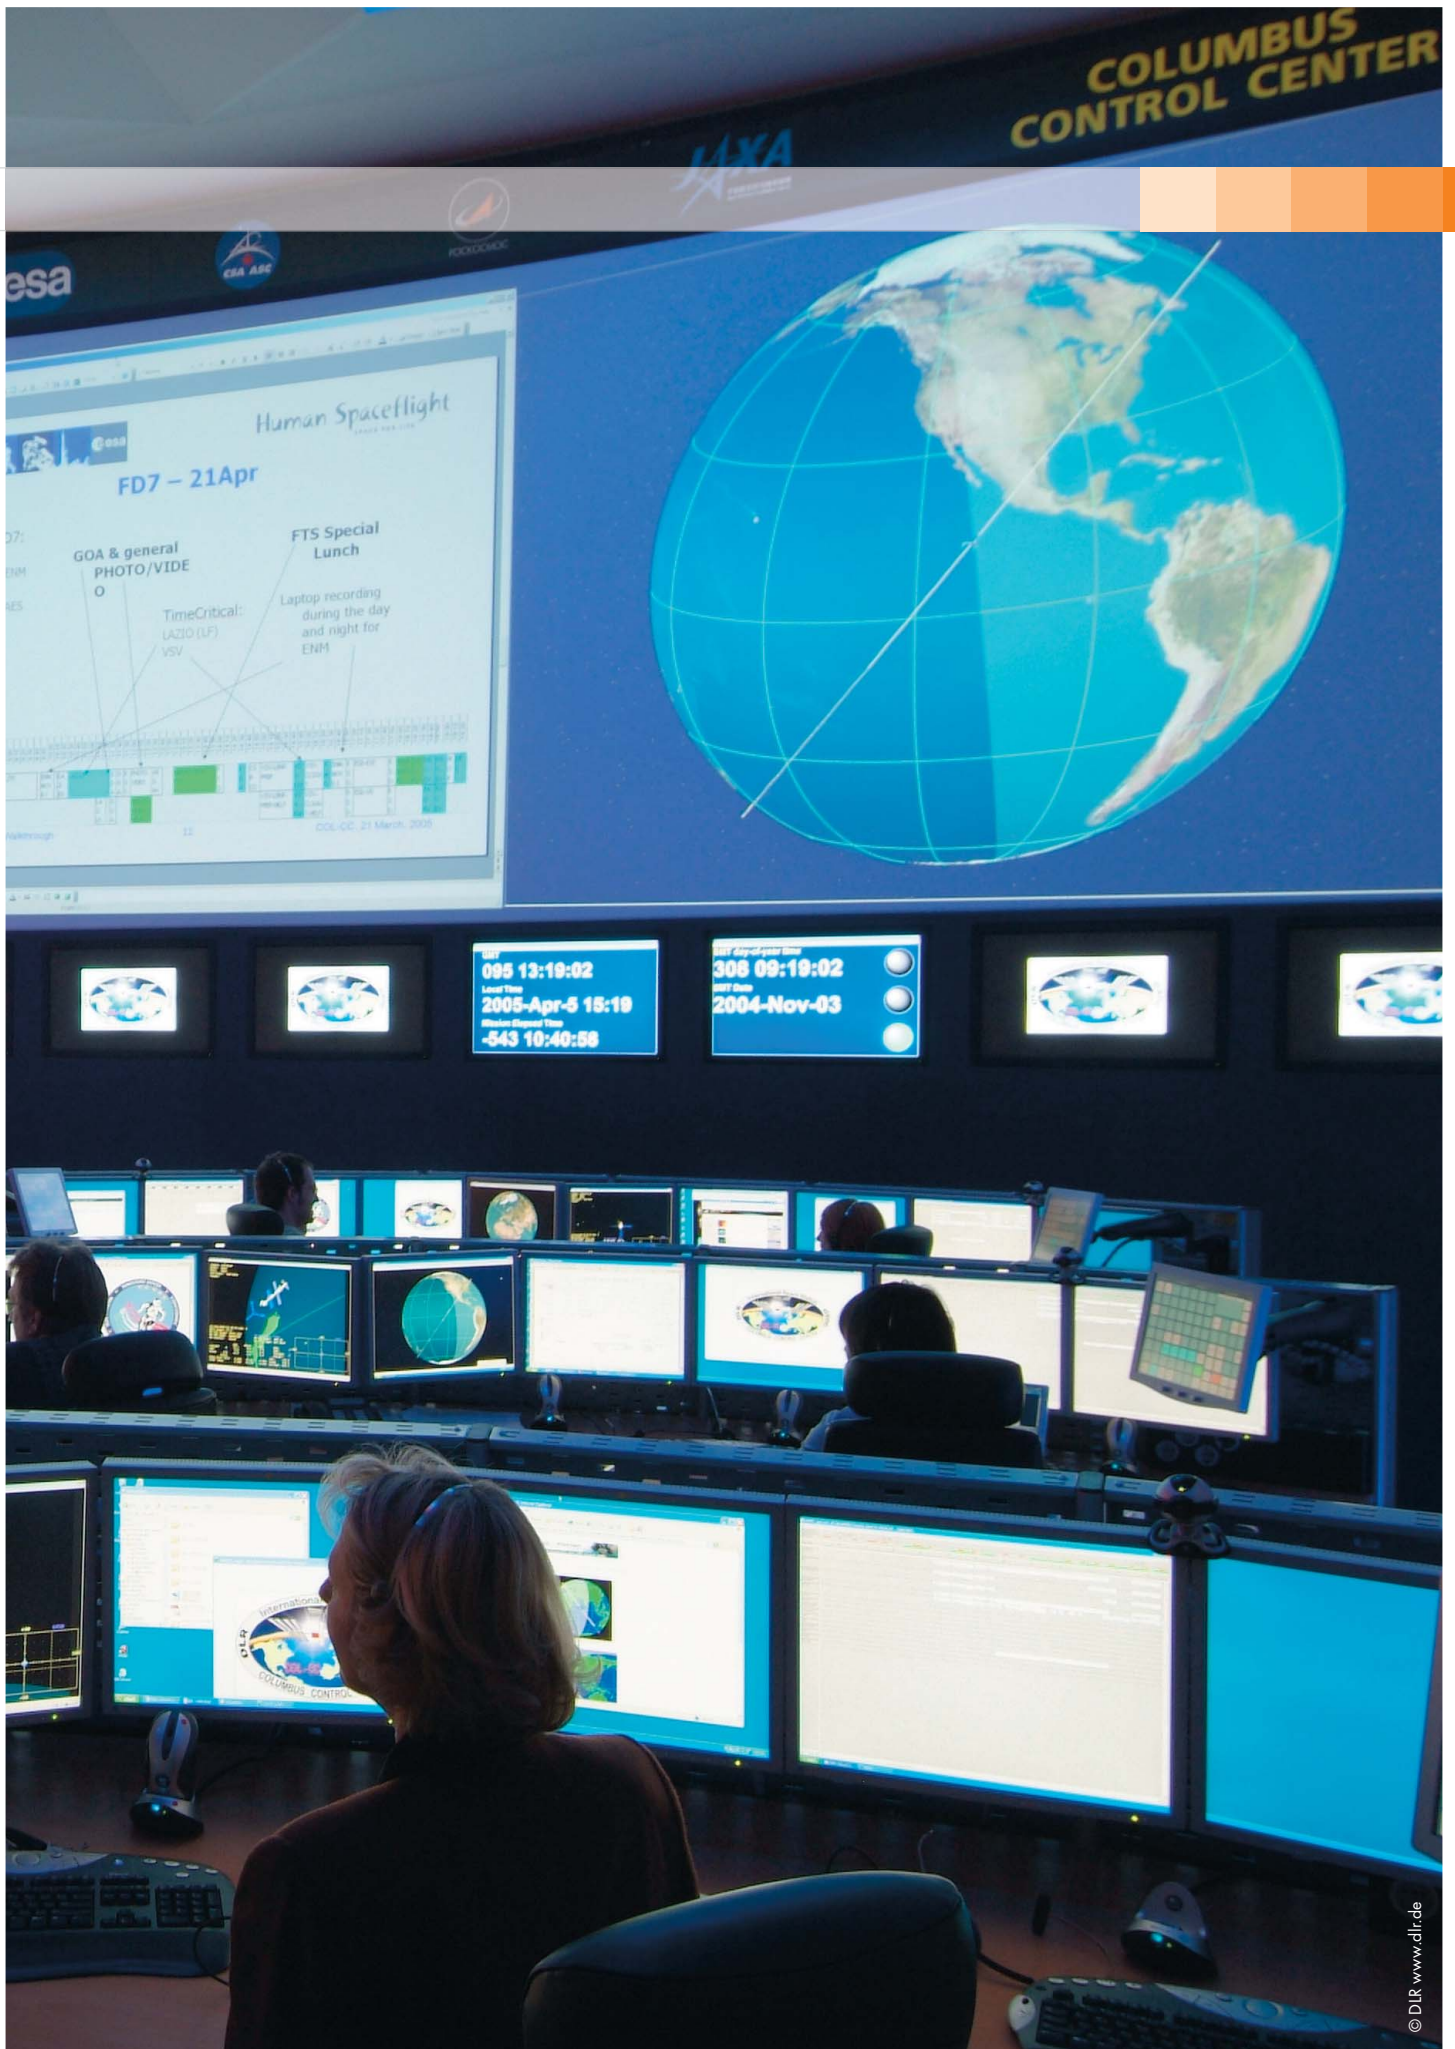

KVM Extender

The CATVision system is part of the group of KVM Extenders and extends keyboard, analogue video, mouse, audio and RS232 signals via CAT cable up to 300 m. Transparent USB 1.1 signals are transmitted up to 100 m. The multi-channel variants can transmit 2, 3 or 4 video channels.

The system consists of two main components; the computer module (transmitter) and the workstation module (receiver). The modules are interconnected via CAT-x cable. The system facilitates the operation of a computer via 2 concurrent (1 x transmitter-side, 1 x receiver-side) workstations.

Highlights

- Resolution up to 1920 x 1440 @ 75 Hz
- Max. transmission length up to 300 m via CAT-x cable
- PS/2 and USB keyboard/mouse support
- Video optimisation via automatic cable compensation
- Individual video-tuning via OSD (IVT)
- Access protection (username/password)
- Rights management for multiple users
- Redundant power supply (optional)
- Compensation of runtime differences/delay (optional)
- Optional equipment features: Audio, RS232 (data and handshake), USB 1.1 (transparent, high power)
- Multi-channel variants for up to 4 video transmissions
- Local workstation included in the modules as standard
- Integrated power pack

Computer module CATVision- MC4-ARUD-CPU

The CATVision computer modules transmit the following signals as standard:

- 1 x analogue video and
- 1 x PS/2 or USB keyboard/mouse

The computer modules are available in variants with up to 4 video channels.

Each of these variants is also available with the following equipment features as an option:

- Audio
- Transparent RS232
- Transparent USB 1.1
- Delay



Front view



Article no.
A141 0023

Workstation module CATVision MC4-ARU-CON

As computer and workstation modules are fundamentally compatible, the workstation modules DVIVision-CON also transmit the following signals as standard:

- 1 x analogue video and
- 1 x PS/2 or USB keyboard/mouse

The workstation modules are available in the same variants and with the same optional equipment features. An exception to this is the "delay" feature. This only works in the computer module and therefore does not need to be considered on the workstation side.



Front view



Article no.
A142 0011



LEGEND

Abbreviations:

CPU	=	Computer module
CON	=	Workstation module
AR	=	Audio + RS232
R	=	RS232
U	=	Transparent USB 1.1
D	=	Delay
RM	=	For assembly in a 19" rack

Equipment features:

 = Analogue video	 = Delay
 = Audio	 = Power
 = RS232	 = Desktop
 = USB	 = Rackmount

Note:

So that the computer and workstation modules correspond, please ensure that the functional features (letters "ARUD") are identical for both modules. An exception to this is the "delay" component (letter D) which is only used in the computer module.

Example:

CATVision-ARUD-CPU + CATVision-ARU-CON = OK
 CATVision-ARUD-CPU + CATVision-U-CON = not OK

A wide range of variants thanks to the modular design, e.g. CV-MC4-ARUD-CPU

The CATVision™ systems can be customised individually to your requirements thanks to their modular nature. The legend opposite shows which equipment options are available to you for your application.

Configure your CATVision systems according to your requirements – naturally also as desktop or rackmount as options.

Operating the main components

The system itself needs no explicit operation. Additional functions (e.g. blanking) are initiated via the OSD AdonIS or keyboard hotkeys.
 The configuration of the system is also carried out via AdonIS.

OSD
 (AdonIS and IVT)

KVM Extender

System features

Workstation per system	2 (concurrent)
Number of monitors/workstation	1 to 4
Computers per system	1
Video format	analogue video
Resolution	up to 1920 x 1440 @ 75 Hz (depending on cable length)
Video bandwidth	250 MHz
Transmission type	
Computer module – workstation module	dedicated CAT-x link
Transmission length (max.)	
Computer module – workstation module	300 m (depending on resolution)
Transmission cable type	CAT-x cable
Update process	local service socket
Operation/configuration via	OSD (AdonIS)
	Individual video tuning (IVT)
	Hotkeys
Operation environment	
Temperature	+5 to +40 °C
Air humidity	20 – 80 %, non-condensing
Conformity	CE, RoHS

x = 5, 6, 7

System hardware

The design of the system hardware offers a range of advantages in use, and here are just a few of those benefits as an illustration.


Area:

Video	VGA resolutions up to 1920 x 1440 @ 75 Hz can be selected
	Automatic and individual video optimisation possible
Connection	No installation preparations
	Individual system modules do not need to be switched on in a specific sequence
	Computer hot-plug: Computer and system modules can be connected during operation
	Stay-alive: When switching off the extender the computer remains unaffected
Expansion	Thanks to the different types of signal, the variants always provide the right transmission solution
	Remote power switching with add-on component "CV Power"



System diagram

- 1** CATVision-MC4-CPU
- 2** CATVision-MC4-CON
- 3** CATVision-MC2-R-CPU
- 4** CATVision-MC2-R-CON
- 5** miniMUX2

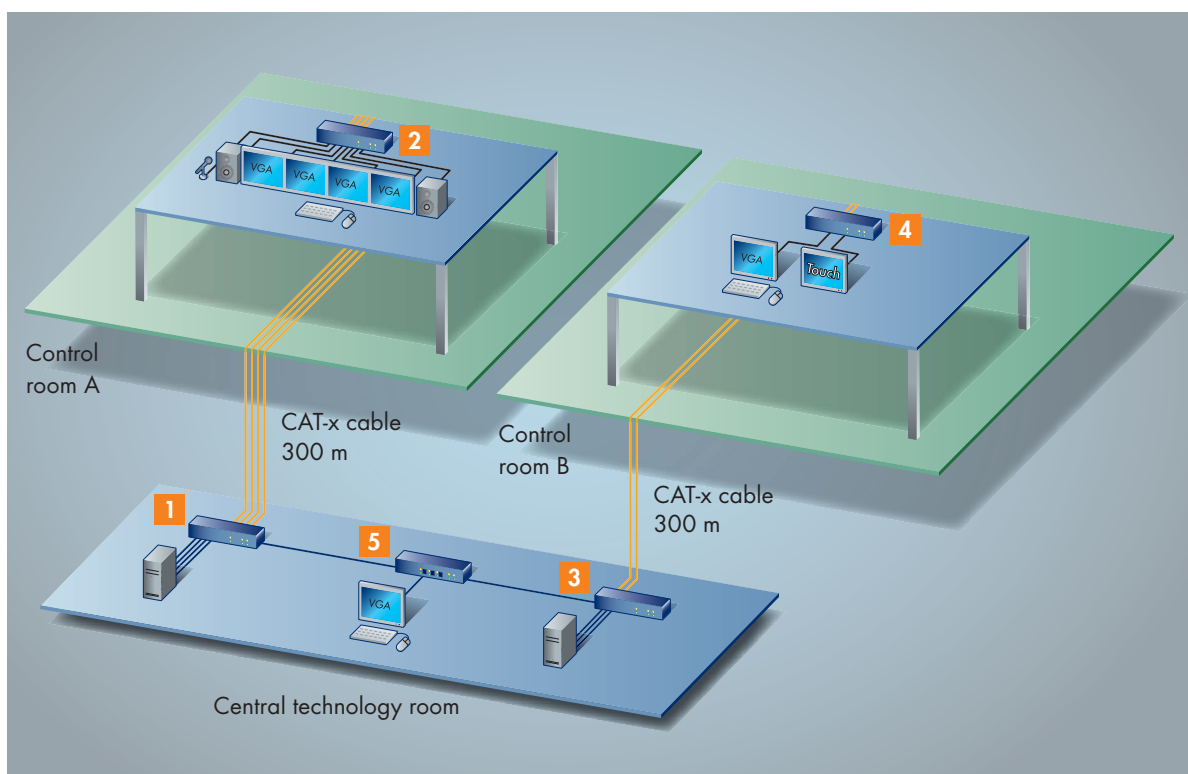

Example: Control room

The operation of process computers located in the technology room is carried out from remote control rooms. Multiple analogue video, audio, RS232 as well as keyboard/mouse are transmitted across a distance of up to 300 m. The computers in the technology room are accessible for maintenance work at all times and are provided with the optimum operation conditions.

For maintenance purposes, the computers in the technology room are interconnected via a miniMUX2.

The boot monitor is visible in each case. This means that one workstation can be used to operate both computers.

When work is being carried out in the technology room, the operator workstations are blocked.

Technicians and operators are separated from one another. The operators do not have to worry about the technology.

KVM Extender

Equipment

Each CATVision system can be ordered with the following equipment features as an option.

- **Transparent RS232**
- **Audio (only in combination with RS232)**
- **Transparent USB 1.1**
- **Delay**

The equipment features given produce the relevant equipment specifications of a CATVision device. Equipment features can be retrofitted at the factory on request.

Transparent RS232



Component for the transmission of transparent RS232 signals

Technical data		Computer module CATVision-CPU	Workstation module CATVision-CON
Interfaces and specifications			
for workstation	RS232	–	1 x D-sub 9 plug
to computer	RS232	1 x D-sub 9 socket	–
Transmission	Additional CAT-x cable	no	no
Design		internal	
RS232 specification	Transmission rate 300 m	Max. 38,400 bit/s	
	Transmission rate 100 m	Max. 57,600 bit/s	
	Signals that can be transmitted	TxD, RxD, RTS, CTS, DTR, DSR	

Audio



Component for the transmission of audio signals (only in combination with RS232)

Technical data		Computer module CATVision-CPU	Workstation module CATVision-CON
Interfaces and specifications			
for workstation	Audio	–	3 x 3.5 mm jack (Line in, micro in, speaker)
to computer	Audio	2 x 3.5 mm jack (line in, line out)	–
Transmission	Additional CAT-x cable	no	no
Design		internal	
Audio specification	Resolution	18-bit digital	
	Sampling rate	48 kHz	
	Bandwidth	22 kHz	
	Microphone preamplification	20 dB	

Delay



Component for compensating of runtime differences (delay)

Inside CAT cables the individual wire pairs are stranded in different ways. This means that the overall lengths of the individual wires change. The RGB colour components of the analogue graphics signal therefore reach the remote monitor after a time delay. These runtime differences generate colour shadows which produce an overall impression of fuzziness. The "delay compensation" equalises runtime differences up to 46 ns and ensures the simultaneous "arrival" of the colours on the monitor.

The delay compensation is used only in the computer module and can be carried out both automatically as well as manually.

With G&D cables the use of the "delay" component is basically recommended for distances exceeding 100 meters. Using the cable "K-C5-OIL", "delay" is obligatory. At use of non-G&D cables even below 100 meters a use might be reasonable.

Technical data		Computer module CATVision-CPU	Workstation module CATVision-CON
Interfaces and specifications			
Design		internal	–
Transmission	Additional CAT-x cable	no	

Transparent USB 1.1



Component for transmitting transparent USB 1.1 signals

Technical data		Computer module CATVision-CPU	Workstation module CATVision-CON
Interfaces and specifications			
for workstation		–	4 x USB-A socket
to computer		1 x USB-B socket	–
Transmission	Additional CAT-x cable	1	
	Interface	1 x RJ45 socket	1 x RJ45 socket
	No. of CAT-x cable from Computer module – workstation module	1	
Design		internal	
USB specifications		transparent USB 1.1	
	Transmission length	up to 100 m	
	Support	High power devices up to 500 mA	
	USB transmission rate	up to 12 Mbit/s	

Expansion CV Power



"CV Power" component for power switching

This component can be retrofitted at the factory on request.

The "CV Power" component allows the computer to be switched on and off remotely (reset and ATX power switching). To do this, a slot card is inserted into the computer to be controlled and connected to the computer module.

On the remote workstation there is corresponding operating hardware from the customer (button, etc.) which is connected to the workstation module. The function is normally available for all CATVision variants. For more details, please contact our sales team.

Technical data		Computer module CATVision-CPU	Workstation module CATVision-CON
Interfaces and specifications			
for workstation		–	3-pole flange plug
to computer		3-pole flange plug	–
Transmission	Additional CAT-x cable	no	

x = 5, 6, 7

KVM Extender

1. Single-channel (1 x video)

**CATVision
ARU-CPU**
Computer module

Article no.
A111 0023



Rear view

**CATVision
ARU-CON**
Workstation module

Article no.
A112 0013



Rear view

The CATVision single-channel is also available as a twin variant.
It combines two computer or workstation modules in a 19" height module.
This provides a space-saving way of operating two computers remotely.

Individual features of the modules

Technical data			Computer module CATVision-CPU	Workstation module CATVision-CON
Power supply	Main	Type	internal power pack	internal power pack
		Connection	1 x inlet connector for non-heating devices (IEC-320 C14)	1 x inlet connector for non-heating devices (IEC-320 C14)
		Power supply	AC100-240V/60-50Hz 140-80 mA	AC100-240V/60-50Hz 240-100 mA
	Redundant (optional)	Type	external power pack	external power pack
		Connection	mini-DIN 4 Power socket	mini-DIN 4 Power socket
		Power supply	+12VDC/0.6A	+12VDC/0.9A
Casing	Material	anodised aluminium	anodised aluminium	
	Dimensions (W x H x D)	Desktop	210 x 44 x 210 mm	210 x 44 x 210 mm
		Rackmount	19", x 1 HU x 210 mm	19", x 1 HU x 210 mm
Weight			approx. 1.1 kg	approx. 1.1 kg
Interfaces				
for workstation	Monitor	Keyboard/mouse	1 x D-sub HD 15 socket	1 x D-sub HD 15 socket
		USB keyboard/mouse	2 x mini-DIN 6 socket	2 x mini-DIN 6 socket
		USB keyboard/mouse	–	2 x USB-A socket
to computer	KVM in	USB keyboard/mouse in	1 x 20-pole MDR socket	–
		USB keyboard/mouse in	1 x USB-B socket	–
for transmission	Computer module – workstation module		1 x RJ45 socket	1 x RJ45 socket
	No. of CAT-x cables from computer module – workstation module		1	1
for updates			1 x 2.5 mm jack	1 x 2.5 mm jack

x = 5, 6, 7

KVM Extender

2. Multi-channel 2 (2 x video)

CATVision MC2-ARU-CPU Computer module

Article no.
A121 0021



Rear view

CATVision MC2-ARU-CON Workstation module

Article no.
A122 0011



Rear view

The CATVision multi-channel 2 is also available as a twin variant. It combines two computer or workstation modules in a 19" height module. This provides a space-saving way to operate two computers with dual-head graphics card remotely.

Individual features of the modules

Technical data			Computer module CATVision-MC2-CPU	Workstation module CATVision-MC2-CON
Power supply	Main	Type	internal power pack	internal power pack
		Connection	1 x inlet connector for non-heating devices (IEC-320 C14)	1 x inlet connector for non-heating devices (IEC-320 C14)
		Power supply	AC100-240V/60-50Hz 0.41-0.2A	AC100-240V/60-50Hz 0.3-0.16A
	Redundant (optional)	Type	external power pack	external power pack
		Connection	mini-DIN 4 Power socket	mini-DIN 4 Power socket
		Power supply	+12VDC/2A	+12VDC/1.5A
Casing	Material	anodised aluminium	anodised aluminium	
	Dimensions (W x H x D)	Desktop	435 x 44 x 210 mm	270 x 44 x 210 mm
		Rackmount	19" x 1 HU x 210 mm	19" x 1 HU x 210 mm
Weight			approx. 1.8 kg	approx. 1.3 kg
Interfaces				
for workstation	Monitor	Keyboard/mouse	2 x D-sub HD 15 socket	2 x D-sub HD 15 socket
		USB keyboard/mouse	–	2 x USB-A socket
		Keyboard/Video/Mouse CPU	1 x 20-pole MDR socket	–
to computer	Video CPU	Video CPU	1 x D-sub HD 15 socket	–
		USB keyboard/mouse CPU	1 x USB-B socket	–
		Computer module – workstation module	2 x RJ45 socket	2 x RJ45 socket
for transmission	No. of CAT-x cable from Computer module – workstation module		2	2
for updates			1 x 2.5 mm jack	1 x 2.5 mm jack

x = 5, 6, 7

KVM Extender

3. Multi-channel 3 (3 x video)

CATVision MC3-ARU-CPU Computer module

Article no.
A131 0021



Rear view

CATVision MC3-ARU-CON Workstation module

Article no.
A132 0011



Rear view

Individual features of the modules

Technical data			Computer module CATVision-MC3-CPU	Workstation module CATVision-MC3-CON
Power supply	Main	Type	internal power pack	internal power pack
		Connection	1 x inlet connector for non-heating devices (IEC-320 C14)	1 x inlet connector for non-heating devices (IEC-320 C14)
		Power supply	AC100-240V/60-50Hz 0.41-0.2A	AC100-240V/60-50Hz 0.3-0.16A
	Redundant (optional)	Type	external power pack	external power pack
		Connection	mini-DIN 4 Power socket	mini-DIN 4 Power socket
		Power supply	+12VDC/2A	+12VDC/1.5A
Casing	Material	anodised aluminium	anodised aluminium	
	Dimensions (W x H x D)	Desktop	435 x 44 x 210 mm	435 x 44 x 210 mm
		Rackmount	19" x 1 HU x 210 mm	19" x 1 HU x 210 mm
Weight			approx. 2.0 kg	approx. 1.9 kg
Interfaces				
for workstation	Monitor	Keyboard/mouse	3 x D-sub HD 15 socket	3 x D-sub HD 15 socket
		USB keyboard/mouse	2 x mini-DIN 6 socket	2 x mini-DIN 6 socket
		USB keyboard/mouse	–	2 x USB-A socket
to computer	Keyboard/Video/Mouse CPU	Keyboard/Video/Mouse CPU	1 x 20-pole MDR socket	–
		Video CPU	2 x D-sub HD 15 socket	–
		USB keyboard/mouse CPU	1 x USB-B socket	–
for transmission	Computer module – workstation module	Computer module – workstation module	3 x RJ45 socket	3 x RJ45 socket
		No. of CAT-x cables from		
		Computer module – workstation module	3	3
for updates			1 x 2.5 mm jack	1 x 2.5 mm jack

x = 5, 6, 7

KVM Extender

4. Multi-channel 4 (4 x video)

CATVision MC4-ARU-CPU Computer module

Article no.
A141 0021



Rear view

CATVision MC4-ARU-CON Workstation module

Article no.
A142 0011



Rear view

Individual features of the modules

Technical data			Computer module CATVision-MC4-CPU	Workstation module CATVision-MC4-CON
Power supply	Main	Type	internal power pack	internal power pack
		Connection	1 x inlet connector for non-heating devices (IEC-320 C14)	1 x inlet connector for non-heating devices (IEC-320 C14)
		Power supply	AC100-240V/60-50Hz 0.41-0.2A	AC100-240V/60-50Hz 0.31-0.16A
	Redundant (optional)	Type	external power pack	external power pack
		Connection	mini-DIN 4 Power socket	mini-DIN 4 Power socket
		Power supply	+12VDC/2A	+12VDC/1.5A
Casing	Material	anodised aluminium	anodised aluminium	
	Dimensions (W x H x D)	Desktop	435 x 44 x 210 mm	435 x 44 x 210 mm
		Rackmount	19" x 1 HU x 210 mm	19" x 1 HU x 210 mm
Weight			approx. 2.0 kg	approx. 2.0 kg
Interfaces				
for workstation	Monitor	Keyboard/mouse	4 x D-sub HD 15 socket	4 x D-sub HD 15 socket
		USB keyboard/mouse	2 x mini-DIN 6 socket	2 x mini-DIN 6 socket
		USB keyboard/mouse	–	2 x USB-A socket
to computer	Keyboard/Video/Mouse CPU	Keyboard/Video/Mouse CPU	1 x 20-pole MDR socket	–
		Video CPU	2 x D-sub HD 15 socket	–
		USB keyboard/mouse CPU	1 x USB-B socket	–
for transmission	Computer module – workstation module	Computer module – workstation module	4 x RJ45 socket	4 x RJ45 socket
		No. of CAT-x cables from		
		Computer module – workstation module	4	4
for updates			1 x 2.5 mm jack	1 x 2.5 mm jack

x = 5, 6, 7

KVM Extender

Functional features

The user is provided with numerous functions which can be used to modify the operation of CATVision in accordance with individual requirements and security guidelines.

User	Up to 8 individual accounts can be configured (+ supervisor and open access account)
	Define user-based OSD displays
	Assign user-based configuration rights
	Workstation logs itself off automatically following inactivity (optional)
Workstation	Integrate keyboards with special functions (optional)
	Set up open, direct access without password prompt
	OSD position and size can be freely defined
	Password protection can be activated
	Blanking a workstation while working on the other workstation (optional)
	Activate continuous access to a workstation on the computer
	Image and access to a workstation is only enabled after entering a hotkey
	Activate the permanent display of the workstation name on the screen
	Edit designation of the system workstation
Update	Exclusive operating mode available for every workstation
	Perform firmware updates via service socket
Video	Trigger the automatic video tuning
	Individual video tuning via IVT, for individual modification of the automatic features (video amplification, cable type matching, delay setting)







NOTE

The abbreviations, such as CPU and others, are explained in more detail on page 23.

1. Single-channel (1 x video)

Computer modules

So that the computer and workstation modules correspond, please ensure that the functional features (letters "ARUD") are identical for both modules. An exception to this is the "delay" component (letter D) which is only used in the computer module. The "D" should not be taken into account when selecting the matching workstation modules (-CON).







Art. no.	Designation	 Audio	 RS232	 transp. USB 1.1	 Delay	 Desktop	 Rackmount
A111 0003	CATVision-CPU					●	
A111 0004	CATVision-CPU-RM						●
A111 0005	CATVision-D-CPU				●	●	
A111 0006	CATVision-D-CPU-RM				●		●
A111 0007	CATVision-R-CPU		●			●	
A111 0008	CATVision-R-CPU-RM		●				●
A111 0009	CATVision-RD-CPU		●		●	●	
A111 0010	CATVision-RD-CPU-RM		●		●		●
A111 0011	CATVision-AR-CPU	●	●			●	
A111 0012	CATVision-AR-CPU-RM	●	●				●
A111 0013	CATVision-ARD-CPU	●	●		●	●	
A111 0014	CATVision-ARD-CPU-RM	●	●		●		●
A111 0015	CATVision-U-CPU			●		●	
A111 0016	CATVision-U-CPU-RM			●			●
A111 0017	CATVision-UD-CPU			●	●	●	
A111 0018	CATVision-UD-CPU-RM			●	●		●
A111 0019	CATVision-RU-CPU		●	●		●	
A111 0020	CATVision-RU-CPU-RM		●	●			●
A111 0021	CATVision-RUD-CPU		●	●	●	●	
A111 0022	CATVision-RUD-CPU-RM		●	●	●		●
A111 0023	CATVision-ARU-CPU	●	●	●		●	
A111 0024	CATVision-ARU-CPU-RM	●	●	●			●
A111 0025	CATVision-ARUD-CPU	●	●	●	●	●	
A111 0026	CATVision-ARUD-CPU-RM	●	●	●	●		●
A111 0027	Twin-CATVision-CPU					●	● *1
A111 0028	Twin-CATVision-D-CPU				●	●	● *1
A111 0029	Twin-CATVision-R-CPU		●			●	● *1
A111 0030	Twin-CATVision-RD-CPU		●		●	●	● *1
A111 0031	Twin-CATVision-AR-CPU	●	●			●	● *1
A111 0032	Twin-CATVision-ARD-CPU	●	●		●	●	● *1
A111 0033	Twin-CATVision-U-CPU			●		●	● *1
A111 0034	Twin-CATVision-UD-CPU			●	●	●	● *1
A111 0035	Twin-CATVision-RU-CPU		●	●		●	● *1
A111 0036	Twin-CATVision-RUD-CPU		●	●	●	●	● *1
A111 0037	Twin-CATVision-ARU-CPU	●	●	●		●	● *1
A111 0038	Twin-CATVision-ARUD-CPU	●	●	●	●	●	● *1

*1 Devices with rackmount kits can be installed at the front or rear of the rack

KVM Extender







1. Single-channel (1 x video)

Workstation modules

Art. no.	Designation	 Audio	 RS232	 transp. USB 1.1	 Delay	 Desktop	 Rackmount
A112 0003	CATVision-CON					●	
A112 0004	CATVision-CON-RM						●
A112 0005	CATVision-R-CON		●			●	
A112 0006	CATVision-R-CON-RM		●				●
A112 0007	CATVision-AR-CON	●	●			●	
A112 0008	CATVision-AR-CON-RM	●	●				●
A112 0009	CATVision-U-CON			●		●	
A112 0010	CATVision-U-CON-RM			●			●
A112 0011	CATVision-RU-CON		●	●		●	
A112 0012	CATVision-RU-CON-RM		●	●			●
A112 0013	CATVision-ARU-CON	●	●	●		●	
A112 0014	CATVision-ARU-CON-RM	●	●	●			●
A112 0043	Twin-CATVision-CON					●	● *1
A112 0044	Twin-CATVision-R-CON		●			●	● *1
A112 0045	Twin-CATVision-AR-CON	●	●			●	● *1
A112 0046	Twin-CATVision-U-CON			●		●	● *1
A112 0047	Twin-CATVision-RU-CON		●	●		●	● *1
A112 0048	Twin-CATVision-ARU-CON	●	●	●		●	● *1







2. Multi-channel 2 (2 x video)

Computer modules







Art. no.	Designation	 Audio	 RS232	 transp. USB 1.1	 Delay	 Desktop	 Rackmount
A121 0001	CATVision-MC2-CPU					●	● *1
A121 0003	CATVision-MC2-D-CPU				●	●	● *1
A121 0005	CATVision-MC2-R-CPU		●			●	● *1
A121 0007	CATVision-MC2-RD-CPU		●		●	●	● *1
A121 0009	CATVision-MC2-AR-CPU	●	●			●	● *1
A121 0011	CATVision-MC2-ARD-CPU	●	●		●	●	● *1
A121 0013	CATVision-MC2-U-CPU			●		●	● *1
A121 0015	CATVision-MC2-UD-CPU			●	●	●	● *1
A121 0017	CATVision-MC2-RU-CPU		●	●		●	● *1
A121 0019	CATVision-MC2-RUD-CPU		●	●	●	●	● *1
A121 0021	CATVision-MC2-ARU-CPU	●	●	●		●	● *1
A121 0023	CATVision-MC2-ARUD-CPU	●	●	●	●	●	● *1

2. Multi-channel 2 (2 x video)

Computer modules

Art. no.	Designation	 Audio	 RS232	 transp. USB 1.1	 Delay	 Desktop	 Rackmount
A121 0025	Twin-CATVision-MC2-CPU					●	● *1
A121 0026	Twin-CATVision-MC2-D-CPU				●	●	● *1
A121 0027	Twin-CATVision-MC2-R-CPU		●			●	● *1
A121 0028	Twin-CATVision-MC2-RD-CPU		●		●	●	● *1
A121 0029	Twin-CATVision-MC2-AR-CPU	●	●			●	● *1
A121 0030	Twin-CATVision-MC2-ARD-CPU	●	●		●	●	● *1

Workstation modules

Art. no.	Designation	 Audio	 RS232	 transp. USB 1.1	 Delay	 Desktop	 Rackmount
A122 0001	CATVision-MC2-CON					●	
A122 0002	CATVision-MC2-CON-RM						●
A122 0003	CATVision-MC2-R-CON		●			●	
A122 0004	CATVision-MC2-R-CON-RM		●				●
A122 0005	CATVision-MC2-AR-CON	●	●			●	
A122 0006	CATVision-MC2-AR-CON-RM	●	●				●
A122 0007	CATVision-MC2-U-CON			●		●	
A122 0008	CATVision-MC2-U-CON-RM			●			●
A122 0009	CATVision-MC2-RU-CON		●	●		●	
A122 0010	CATVision-MC2-RU-CON-RM		●	●			●
A122 0011	CATVision-MC2-ARU-CON	●	●	●		●	
A122 0012	CATVision-MC2-ARU-CON-RM	●	●	●			●
A122 0031	Twin-CATVision-MC2-CON					●	● *1
A122 0032	Twin-CATVision-MC2-R-CON		●			●	● *1
A122 0033	Twin-CATVision-MC2-AR-CON	●	●			●	● *1

*1 Devices with rackmount kits can be installed at the front or rear of the rack

So that the computer and workstation modules correspond, please ensure that the functional features (letters "ARUD") are identical for both modules. An exception to this is the "delay" component (letter D) which is only used in the computer module. The "D" should not be taken into account when selecting the matching workstation modules (-CON).

NOTE







The abbreviations, such as CPU and others, are explained in more detail on page 23.

When ordering, please quote the article number and designation.







KVM Extender

3. Multi-channel 3 (3 x video)

Computer modules







Art. no.	Designation	 Audio	 RS232	 transp. USB 1.1	 Delay	 Desktop	 Rackmount
A131 0001	CATVision-MC3-CPU					●	● *1
A131 0003	CATVision-MC3-D-CPU				●	●	● *1
A131 0005	CATVision-MC3-R-CPU		●			●	● *1
A131 0007	CATVision-MC3-RD-CPU		●		●	●	● *1
A131 0009	CATVision-MC3-AR-CPU	●	●			●	● *1
A131 0011	CATVision-MC3-ARD-CPU	●	●		●	●	● *1
A131 0013	CATVision-MC3-U-CPU			●		●	● *1
A131 0015	CATVision-MC3-UD-CPU			●	●	●	● *1
A131 0017	CATVision-MC3-RU-CPU		●	●		●	● *1
A131 0019	CATVision-MC3-RUD-CPU		●	●	●	●	● *1
A131 0021	CATVision-MC3-ARU-CPU	●	●	●		●	● *1
A131 0023	CATVision-MC3-ARUD-CPU	●	●	●	●	●	● *1

Workstation modules

Art. no.	Designation	 Audio	 RS232	 transp. USB 1.1	 Delay	 Desktop	 Rackmount
A132 0001	CATVision-MC3-CON					●	● *1
A132 0003	CATVision-MC3-R-CON		●			●	● *1
A132 0005	CATVision-MC3-AR-CON	●	●			●	● *1
A132 0007	CATVision-MC3-U-CON			●		●	● *1
A132 0009	CATVision-MC3-RU-CON		●	●		●	● *1
A132 0011	CATVision-MC3-ARU-CON	●	●	●		●	● *1

4. Multi-channel 4 (4 x video)







Computer modules

Art. no.	Designation	 Audio	 RS232	 transp. USB 1.1	 Delay	 Desktop	 Rackmount
A141 0001	CATVision-MC4-CPU					●	● *1
A141 0003	CATVision-MC4-D-CPU				●	●	● *1
A141 0005	CATVision-MC4-R-CPU		●			●	● *1
A141 0007	CATVision-MC4-RD-CPU		●		●	●	● *1
A141 0009	CATVision-MC4-AR-CPU	●	●			●	● *1
A141 0011	CATVision-MC4-ARD-CPU	●	●		●	●	● *1
A141 0013	CATVision-MC4-U-CPU			●		●	● *1
A141 0015	CATVision-MC4-UD-CPU			●	●	●	● *1
A141 0017	CATVision-MC4-RU-CPU		●	●		●	● *1
A141 0019	CATVision-MC4-RUD-CPU		●	●	●	●	● *1
A141 0021	CATVision-MC4-ARU-CPU	●	●	●		●	● *1
A141 0023	CATVision-MC4-ARUD-CPU	●	●	●	●	●	● *1

4. Multi-channel 4 (4 x video)

So that the computer and workstation modules correspond, please ensure that the functional features (letters "ARUD") are identical for both modules. An exception to this is the "delay" component (letter D) which is only used in the computer module. The "D" should not be taken into account when selecting the matching workstation modules (-CON).

Workstation modules

Art. no.	Designation	 Audio	 RS232	 transp. USB 1.1	 Delay	 Desktop	 Rackmount
A142 0001	CATVision-MC4-CON					●	● *1
A142 0003	CATVision-MC4-R-CON		●			●	● *1
A142 0005	CATVision-MC4-AR-CON	●	●			●	● *1
A142 0007	CATVision-MC4-U-CON			●		●	● *1
A142 0009	CATVision-MC4-RU-CON		●	●		●	● *1
A142 0011	CATVision-MC4-ARU-CON	●	●	●		●	● *1

*1 Devices with rackmount kits can be installed at the front or rear of the rack

When ordering, please quote the article number and designation.

Connectivity

Depending on the equipment features selected, the computer connection cable is included, length 2 m. Power supply cable and power packs are included as standard, redundant power supply always needs to be ordered separately. Alternative lengths are available and are priced to order.

Art. no.	Designation	Category in KVM Connectivity	Function
see KVM Connectivity	CPU-x	Computer connection cables	computer connection
	VGA-M/M-x	Video cables	computer connection
	RS232-M/F-x	Serial cables	computer connection
	Audio-M/M-x	Audio cables	computer connection
	USB-AM/BM-x	USB cables	computer connection
	K-C7-x	Ready-made cables	transmission up to 100 m
	K-C5-OIL-x ¹⁾	Ready-made cables	outside transmission up to 100 m
	K-C7-LD-x	Ready-made cables	transmission over 100 m

x = length in metres, see KVM Connectivity for lengths available.

¹⁾ Choose the equipment feature "delay" using this cable

Expansions CV Power

Art. no.	Designation
A180 0001	CV-Power-CPU
A180 0002	CV-Power-CON

Accessories

Art. no.	Designation
A411 0008	Power-Set 12-Type 2 Power supply, redundant

x = 5, 6, 7

KVM Extender

The LwLVision system forms part of the KVM extender group and extends the signals keyboard, analogue/digital video, mouse, audio, RS232 and transparent USB 1.1 via optical fibre (2 fibres) up to 10,000 m. Transparent USB 1.1 signals are transmitted up to 2,000 m. The multi-channel variant can transmit 2 video channels.

The system consists of two main components; the computer module (transmitter) and the workstation module (receiver). The modules are interconnected via optical fibre. The system facilitates the operation of a computer via 2 concurrent (1 x transmitter-side, 1 x receiver-side) workstations.

Highlights

- Resolution up to 1600 x 1200 @ 60 Hz
- Max. transmission length up to 10,000 m via optical fibre
- PS/2 and USB keyboard/mouse support
- Support of digital and analogue video
- Access protection (username/password)
- Rights management for multiple users
- Redundant power supply (optional)
- Transmission of audio and RS232 signals (data and handshake) included as standard
- Optional equipment feature: USB 1.1 (transparent, high power)
- Multi-channel variants for up to 2 video transmissions
- Local workstation included in the modules as standard
- Integrated power pack

Computer module LwLVision(S) MC2-ARU-PC

The LwLVision computer modules transmit the following signals as standard:

- 1 x analogue/digital video
- 1 x PS/2 or USB keyboard/mouse
- 1 x audio + transparent RS232 (in combination)

The computer modules are available as a variant with up to 2 video channels.

Both variants are available with the equipment feature "transparent USB 1.1" as an option.



Front view



Article no.
A121 0051

Workstation module LwLVision(S) MC2-ARU-REM

As the computer and workstation modules essentially correspond to one another, the workstation modules LwLVision-REM also transmit the following signals as standard:

- 1 x analogue/digital video
- 1 x PS/2 or USB keyboard/mouse
- 1 x audio + transparent RS232 (in combination)

The workstation modules are available in the same variant and with the same optional equipment features.



Front view



Article no.
A122 0027

LEGEND

Abbreviations:

PC	=	Computer module
REM	=	Workstation module
AR	=	Audio + RS232
U	=	Transparent USB 1.1
RM	=	For assembly in a 19" rack
M	=	Multimode
S	=	Singlemode

Equipment features:

	=	Analogue video		=	USB
	=	Digital video		=	Desktop
	=	Audio		=	Rackmount
	=	RS232			

Note:

To ensure that the computer and workstation modules match, please check that the functional features (letters "ARU" and "M" and "S") are identical for both modules.

Example:

LwLVision(S)-MC2-ARU-PC + LwLVision(S)-MC2-ARU-REM = OK

LwLVision(S)-MC2-ARU-PC + LwLVision(M)-MC2-AR-REM = not OK

A wealth of variants thanks to modular design, e.g. LwLVision-MC2-ARU-PC

The LwLVision systems can be modified specifically to your requirements thanks to their modular design. The legend opposite shows which equipment options are available to you for your application.

Configure your LwLVision systems exactly as you want them – either as desktop or rackmount, as you prefer.

Operating the main components

The system itself needs no explicit operation. Additional functions (e.g. blanking) are initiated via the OSD AdonIS or keyboard hotkeys.

The configuration of the system is also carried out via AdonIS.

OSD
(AdonIS)

KVM Extender

System features

Workstation per module	2 (concurrent)
Number of monitors/workstation	1 to 2
Computers per system	1
Signal type/video	analogue/digital video
Resolution	from 640 x 350 @ 120 Hz to 1600 x 1200 @ 60 Hz (multi-channel per channel)
Transmission technology	
Computer module – workstation module	dedicated fibre optic link
Transmission length (max.)	
Computer module – workstation module	550 m via 2 multimode fibres (50/125 µm)
Transmission length (max.)	
Computer module – workstation module	10,000 m via 2 singlemode fibres (9/125 µm)
Transmission cable type	Fibre optic (2 fibres)
Update process	local service socket
Operation/configuration via	OSD (AdonIS) Hotkeys
Operation environment	
Temperature	+5 to +40 °C
Air humidity	20 – 80 %, non-condensing
Conformity	CE, RoHS

System hardware


The design of the system hardware offers a range of advantages in use, and here are just a few of those benefits as an illustration.

Area:

Video	VGA resolutions up to 640 x 350 @ 120 Hz to 1600 x 1200 @ 60 Hz digital (Multi-channel per channel)
Connection	No prior installation work Computer hot-plug: Computer and system modules can be connected during operation Stay-alive: When switching off the extender the computer remains unaffected

System diagram

- 1 LwLVision-AR-PC
- 2 LwLVision-AR-REM
- 3 DVIMUX4

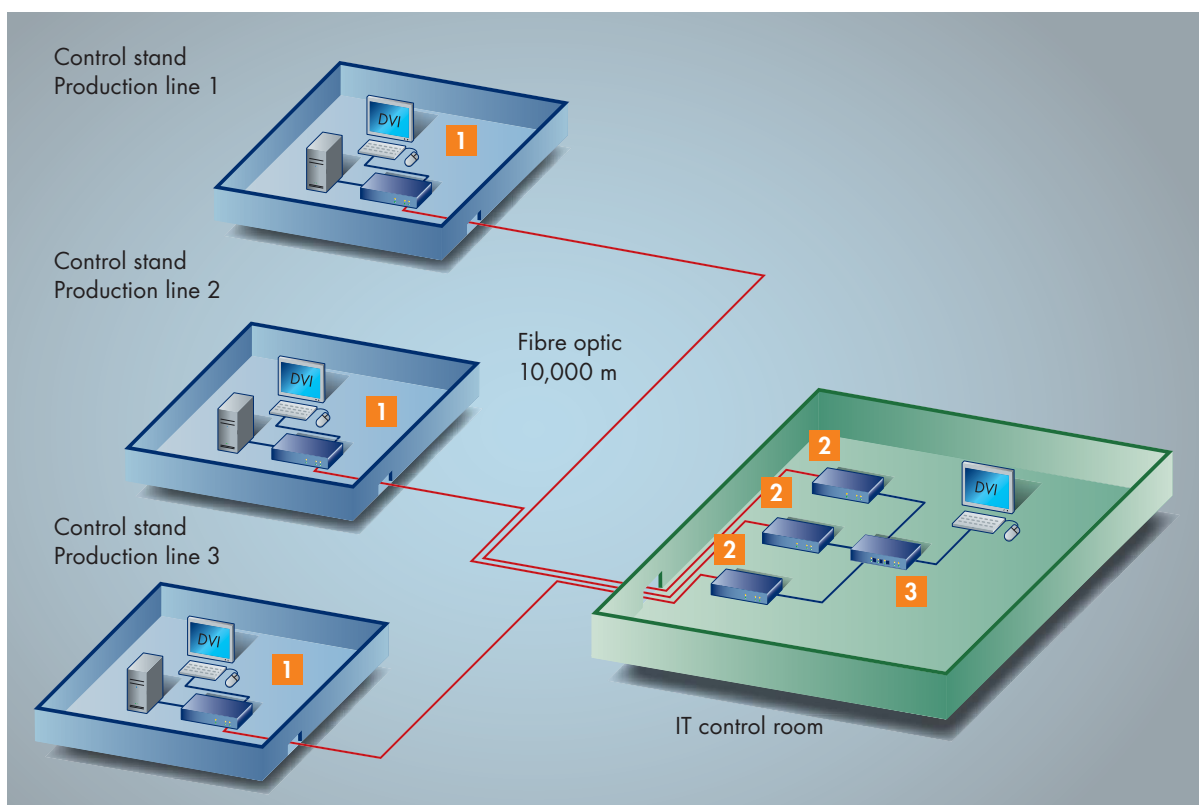

Example: Monitoring three production lines

Three production lines are monitored via local control stands. These three control stands are connected to the administration office of the IT control centre 10,000 m away via LwLVision.

In the event of an error, the administrator can access all three production lines at all times on the control computer. The LwLVision system receivers have been centralised via a DVIMUX4 and collected together on an admin workstation. The admin can therefore switch to the relevant line and needs only one monitor, one keyboard and one mouse. The fibre optic transmission is not susceptible to interference from this environment.

The control stand computers can be operated and maintained by the machine operator and the remote administrator. The IT administrator does not need to be on site in the production environment.

Equipment

Each LwLVision system can be ordered with the following optional equipment feature:
- **Transparent USB 1.1**
This equipment feature can be retrofitted at the factory on request.

Transparent USB 1.1




Component for transmitting transparent USB 1.1 signals

Technical data		Computer module LwLVision-PC	Workstation module LwLVision-REM
Interfaces and specifications	for workstation	–	4 x USB-A socket
	to computer	1 x USB-B socket	–
	Transmission	Additional fibre optic cable	
	Design	no	
	USB specifications	internal	
		transparent USB 1.1	
		Transmission length	
		up to 2000 m	
		Support	
High power devices up to 500 mA			
USB transmission rate			
up to 12 Mbit/s			

NOTE

The abbreviations such as ARU and others are explained in more detail on page 43.

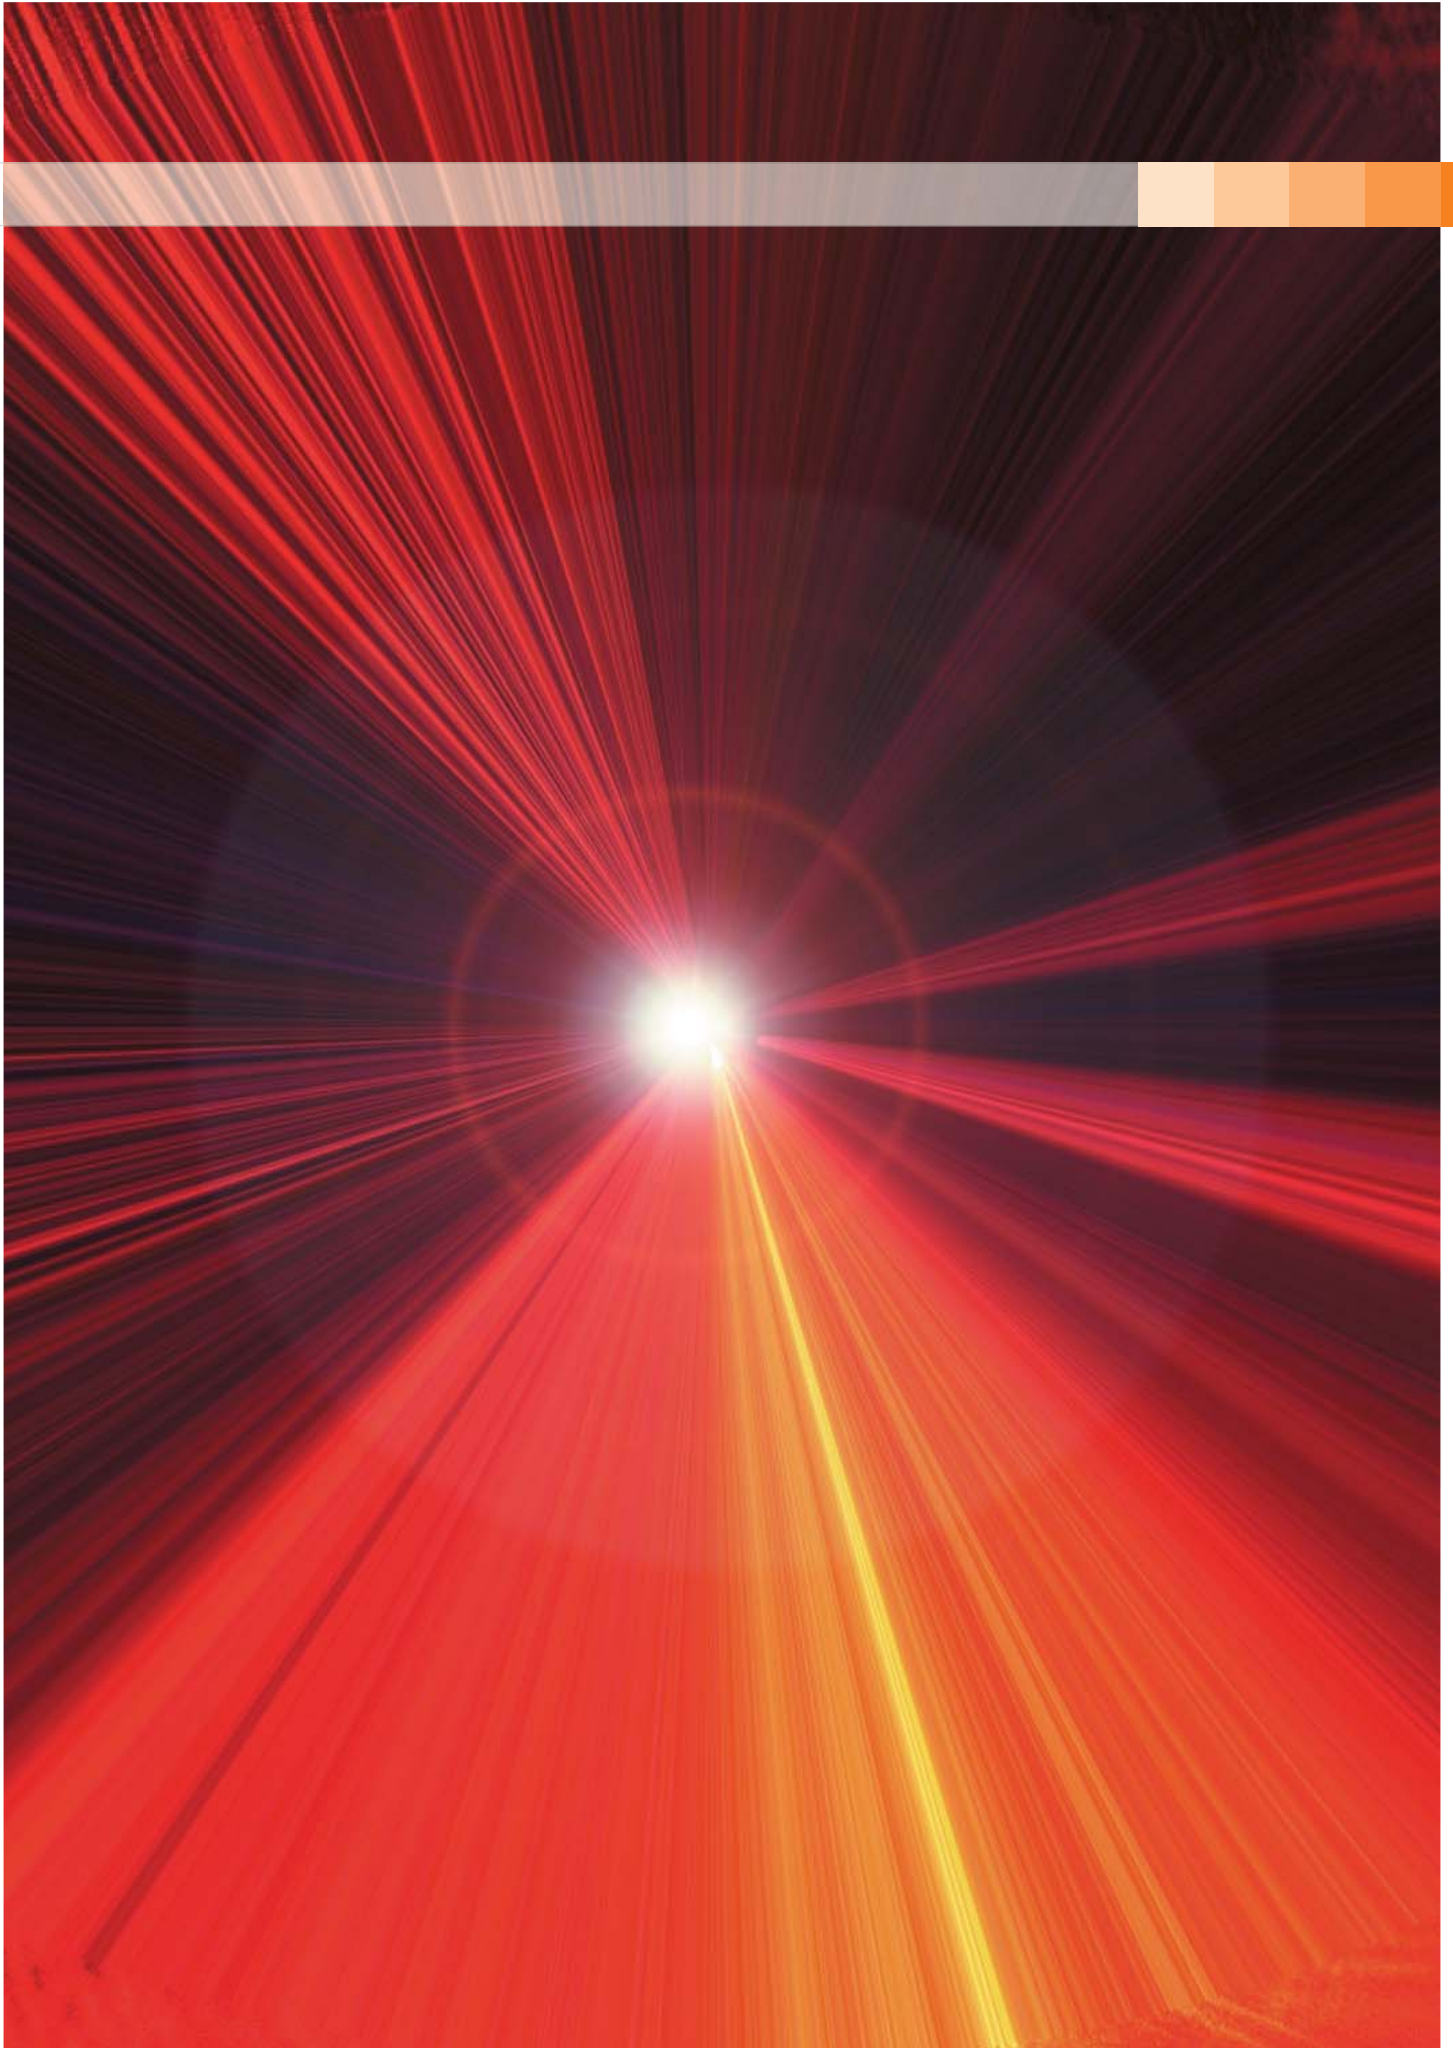

KVM Extender

1. Single-channel (1 x video)

The LwLVision single-channel is available in 2 variants:

When used with multimode fibres (50/125 µm), LwLVision(M) bridges up to 550 m.

When used with singlemode fibres (9/125 µm), LwLVision(S) bridges up to 10,000 m.

LwLVision(S)- ARU-PC

Computer module

Article no.
A111 0057



Rear view

LwLVision(S)- ARU-REM

Workstation module

Article no.
A112 0029



Rear view

The LwLVision single-channel is also available as a twin variant.

This combines two computer modules or workstation modules on one 19" height module.

This provides a space-saving way of operating two computers remotely.

Individual features of the modules

Technical data			Computer module LwLVision-AR-PC	Workstation module LwLVision-AR-REM
Power supply	Main	Type	internal power pack	internal power pack
		Connection	1 x inlet connector for non-heating devices (IEC-320 C14)	1 x inlet connector for non-heating devices (IEC-320 C14)
		Power supply	AC100-240V/60-50Hz 0.3-0.2A	AC100-240V/60-50Hz 0.4-0.2A
	Redundant (optional)	Type	external power pack	external power pack
		Connection	mini-DIN 4 Power socket	mini-DIN 4 Power socket
		Power supply	+12VDC/1.2A	+12VDC/1.2A
Casing	Material	anodised aluminium	anodised aluminium	
	Dimensions (W x H x D)	Desktop	210 x 44 x 210 mm	210 x 44 x 210 mm
		Rackmount	19" x 1 HU x 210 mm	19" x 1 HU x 210 mm
Weight			approx. 1.3 kg	approx. 1.3 kg
Interfaces/specifications				
for workstation	Monitor		1 x DVI-I socket	1 x DVI-D socket 1 x D-sub HD 15 socket
		Keyboard/mouse	2 x mini-DIN 6 socket	2 x mini-DIN 6 socket
		USB keyboard/mouse	–	2 x USB-A socket
	Audio		–	2 x 3.5 mm jack (micro in, speaker)
		Resolution	18 bit digital	
		Sampling rate	48 kHz	
		Bandwidth	22 kHz	
		Microphone pre-amplification	20 dB	
	RS232		–	1 x D-sub 9 plug
		Transmission rate	max. 57,600 bit/s	
		Signals that can be transmitted:	TxD, RxD, RTS, CTS, DTR, DSR, DCD	
	to computer	Keyboard/Mouse CPU	1 x D-sub HD 15 plug	–
		Video CPU	1 x DVI-I-socket	–
		USB keyboard/mouse CPU	1 x USB-B socket	–
		Audio (for specifications, see above)	2 x 3.5 mm jack (Line in, Line out)	–
		RS232 (for specifications, see above)	1 x D-sub 9 socket	–
for transmission	Computer module – workstation module		1 x SC Duplex socket	1 x SC Duplex socket
	No. of optical fibres from Computer module – workstation module		2	
	for updates		1 x 2.5 mm jack	1 x 2.5 mm jack

KVM Extender

2. Multi-channel 2 (2 x video)

The LwLVision Multi-channel is available in 2 variants:

When used with multimode fibres (50/125 µm), LwLVision(M)-MC2 bridges up to 550 m.

When used with singlemode fibres (9/125 µm), LwLVision(S)-MC2 bridges up to 10,000 m.

LwLVision(S)- MC2-ARU-PC Computer module

Article no.
A121 0051



Rear view

LwLVision(S)- MC2-ARU-REM Workstation module

Article no.
A122 0027



Rear view

Individual features of the modules

Technical data			Computer module LwLVision-MC2-AR-PC	Workstation module LwLVision-MC2-AR-REM
Power supply	Main	Type	internal power pack	internal power pack
		Connection	1 x inlet connector for non-heating devices (IEC-320 C14)	1 x inlet connector for non-heating devices (IEC-320 C14)
		Power supply	AC100-240V/60-50Hz 0.4-0.2A	AC100-240V/60-50Hz 0.4-0.2A
	Redundant (optional)	Type	external power pack	external power pack
		Connection	mini-DIN 4 Power socket	mini-DIN 4 Power socket
		Power supply	+12VDC/1.9A	+12VDC/1.9A
Casing	Material	anodised aluminium	anodised aluminium	
	Dimensions (W x H x D)	Desktop	435 x 44 x 210 mm	435 x 44 x 210 mm
		Rackmount	19" x 1 HU x 210 mm	19" x 1 HU x 210 mm
Weight			approx. 2.1 kg	approx. 2.1 kg
Interfaces/specifications				
for workstation	Monitor		2 x DVI-I socket –	2 x DVI-D socket 2 x D-sub HD 15 socket
		Keyboard/mouse	2 x mini-DIN 6 socket	2 x mini-DIN 6 socket
		USB keyboard/mouse	–	2 x USB-A socket
		Audio	–	2 x 3.5 mm jack (micro in, speaker)
		Resolution	18 bit digital	
		Sampling rate	48 kHz	
		Bandwidth	22 kHz	
		Microphone pre-amplification	20 dB	
	RS232		–	1 x D-sub 9 plug
		Transmission rate	max. 57,600 bit/s	
		Signals that can be transmitted:	TxD, RxD, RTS, CTS, DTR, DSR, DCD	
		to computer	Keyboard/Mouse CPU	1 x D-sub HD 15 plug
	Video CPU		1 x DVI-I-socket	–
	USB keyboard/mouse CPU		1 x USB-B socket	–
	Audio (for specifications, see above)		2 x 3.5 mm jack (Line in, Line out)	–
	for transmission	RS232 (for specifications, see above)	1 x D-sub 9 socket	–
Computer module – workstation module		2 x SC Duplex socket	2 x SC Duplex socket	
No. of optical fibres from Computer module – workstation module		3		
for updates			1 x 2.5 mm jack	1 x 2.5 mm jack

KVM Extender

Functional features

Users are provided with a wide range of functions which can be used to modify the operation of the LwLVision to your individual requirements and safety guidelines.

User	Up to 8 individual accounts can be configured (+ supervisor and open access account)
	Define user-based OSD displays
	Assign individual configuration rights
	Assign user-based configuration rights
	Set up viewing rights only on the computer
	Workstation logs itself off automatically following inactivity (optional)
System info	Viewing information on image parameters of the signal input
	Show DDC information on the monitors used
Workstation	OSD position and size can be freely defined
	Password protection can be activated
	Activate access protection via auto log-off when leaving the workstation
	Blanking a workstation while working on the other workstation (optional)
	Activate continuous access to a workstation on the computer
	Protected Mode: Enable image and access to a workstation only after a hotkey is entered
	Edit designation of the remote workstation
	Activate permanent display of the workstation name on the remote screen
Update	Exclusive operating mode available for every workstation
	Perform firmware updates via service socket
Video	Automatic video adjustment: Automatic setting of image position, clock and phase
	Automatic video scaling: Automatic adjustment of the resolution on the workstation
	Manual fine adjustment possible for analogue image signals
	Set fixed resolution
	Set upper resolution limit

NOTE

The abbreviations such as ARU and others are explained in more detail on page 43.

Single-channel (1 x video) Multimode

To ensure that the computer module and workstation module match, please check that the functional features (letters "ARU" as well as "M" and "S") are identical for both modules.

Computer modules

Art. no.	Designation	Audio RS232	transp. USB 1.1	Desktop	Rackmount
A111 0041	LwLVision(M)-AR-PC	●		●	
A111 0042	LwLVision(M)-AR-PC-RM	●			●
A111 0045	LwLVision(M)-ARU-PC	●	●	●	
A111 0046	LwLVision(M)-ARU-PC-RM	●	●		●
A111 0048	Twin-LwLVision(M)-AR-PC	●		●	● *1
A111 0050	Twin-LwLVision(M)-ARU-PC	●	●	●	● *1

Workstation modules

Art. no.	Designation	Audio RS232	transp. USB 1.1	Desktop	Rackmount
A112 0017	LwLVision(M)-AR-Rem	●		●	
A112 0018	LwLVision(M)-AR-Rem-RM	●			●
A112 0021	LwLVision(M)-ARU-Rem	●	●	●	
A112 0022	LwLVision(M)-ARU-Rem-RM	●	●		●
A112 0055	Twin-LwLVision(M)-AR-Rem	●		●	● *1
A112 0056	Twin-LwLVision(M)-ARU-Rem	●	●	●	● *1

*1 Devices with rackmount kits can be installed at the front or rear of the rack

KVM Extender

Single-channel (1 x video) **Singlemode**

Computer modules



Art. no.	Designation	Audio RS232	transp. USB 1.1	Desktop	Rackmount
A111 0053	LwLVision(S)-AR-PC	●		●	
A111 0054	LwLVision(S)-AR-PC-RM	●			●
A111 0057	LwLVision(S)-ARU-PC	●	●	●	
A111 0058	LwLVision(S)-ARU-PC-RM	●	●		●
A111 0060	Twin-LwLVision(S)-AR-PC	●		●	● *1
A111 0062	Twin-LwLVision(S)-ARU-PC	●	●	●	● *1

Workstation modules




Art. no.	Designation	Audio RS232	transp. USB 1.1	Desktop	Rackmount
A112 0025	LwLVision(S)-AR-Rem	●		●	
A112 0026	LwLVision(S)-AR-Rem-RM	●			●
A112 0029	LwLVision(S)-ARU-Rem	●	●	●	
A112 0030	LwLVision(S)-ARU-Rem-RM	●	●		●
A112 0057	Twin-LwLVision(S)-AR-Rem	●		●	● *1
A112 0058	Twin-LwLVision(S)-ARU-Rem	●	●	●	● *1

*1 Devices with rackmount kits can be installed at the front or rear of the rack

Multi-channel 2 (2 x video) **Multimode**

Computer modules



Art. no.	Designation	Audio RS232	transp. USB 1.1	Desktop	Rackmount
A121 0039	LwLVision(M)-MC2-AR-PC	●		●	● *1
A121 0043	LwLVision(M)-MC2-ARU-PC	●	●	●	● *1

Workstation modules



Art. no.	Designation	Audio RS232	transp. USB 1.1	Desktop	Rackmount
A122 0015	LwLVision(M)-MC2-AR-Rem	●		●	● *1
A122 0019	LwLVision(M)-MC2-ARU-Rem	●	●	●	● *1

Multi-channel 2 (2 x video) **Singlemode**

To ensure that the computer module and workstation module match, please check that the functional features (letters "ARU" as well as "M" and "S") are identical for both modules.

Computer modules



Art. no.	Designation	Audio RS232	transp. USB 1.1	Desktop	Rackmount
A121 0047	LwLVision(S)-MC2-AR-PC	●		●	● *1
A121 0051	LwLVision(S)-MC2-ARU-PC	●	●	●	● *1

Workstation modules



Art. no.	Designation	Audio RS232	transp. USB 1.1	Desktop	Rackmount
A122 0023	LwLVision(S)-MC2-AR-Rem	●		●	● *1
A122 0027	LwLVision(S)-MC2-ARU-Rem	●	●	●	● *1

*1 Devices with rackmount kits can be installed at the front or rear of the rack

Connectivity

Depending on the equipment features selected, the computer connection cable is included, length 2 m. Power supply cable and power packs are included as standard, redundant power supply always needs to be ordered separately. Alternative lengths are available and are priced to order.

Art. no.	Designation	Category in KVM Connectivity	Function
see KVM Connectivity	VGA-M/DVI-A-M-x	Video cables	computer connection
	DVI-D-SL-M/M-x	Video cables	computer connection
	ADAPTER DVI-I-HD15F	Adapters (passive)	adapter for comp. connect.
	SOKA-G-2	Particular cables	computer connection
	RS232-M/F-x	Serial cables	computer connection
	Audio-M/M-x	Audio cables	computer connection
	USB-AM/BM-x	USB cables	computer connection
	K-LwLm-SCD-x	Ready-made cables	transmission in multimode
	K-LwLs-SCD-x	Ready-made cables	transmission in singlemode
	K-LwLm-out-SCD-x	Ready-made cables	outside transmission in multimode
	K-LwLm-out-2SCD-x	Ready-made cables	dual outside transmission in multimode

x = length in metres, see KVM Connectivity for lengths available.

Accessories

Art. no.	Designation
A411 0008	Power-Set 12-Type 2 Power supply, redundant

When ordering, please quote the article number and designation.

KVM Extender

The CAT-RS232 extender system forms part of the group of KVM extenders and extends transparent RS232 signals via CAT-x cable up to 300 m (slow mode up to 400 m).

The system consists of two main components; the computer module (transmitter) and the workstation module (receiver).
The modules are interconnected via CAT-x cable.

Computer module CAT-RS232-CPU

Article no.
A199 0006

The computer and workstation modules of the CAT-RS232 extender transmit bidirectional transparent RS232 signals.




Top view

Workstation module CAT-RS232-CON

Article no.
A199 0007



Top view

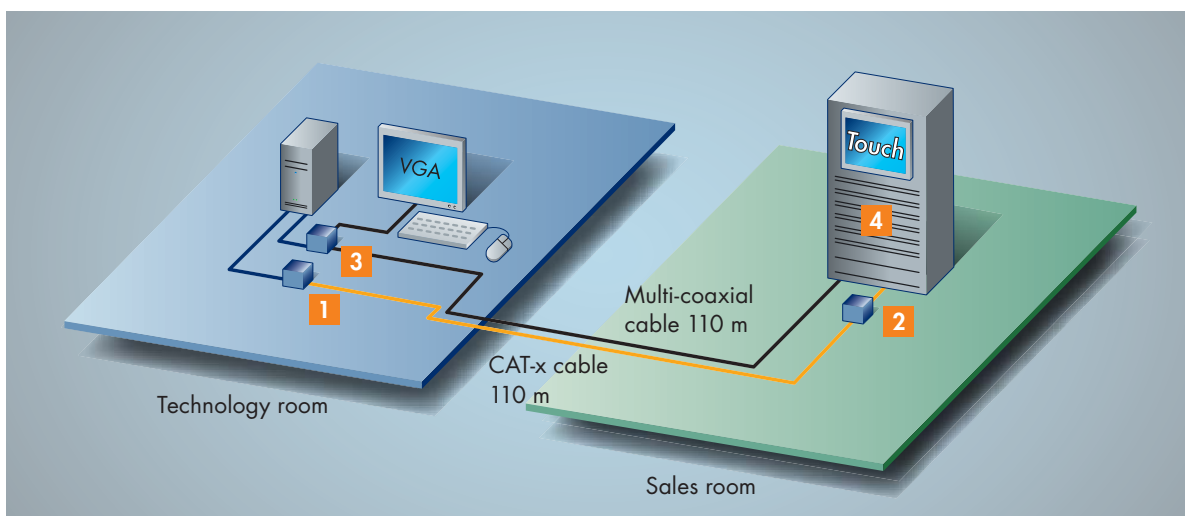

System diagram

- 1 CAT-RS232 Extender-CPU
- 2 CAT-RS232 Extender-CON
- 3 VideoSplitter 2plus
- 4 Customer information terminal

Example: Digital signage application from technology room to sales room.

The computer is located in an air-conditioned, access-protected technology room. The combination of CAT-RS232 extender and VideoSplitter 2plus extends the touchscreen signals (RS232/analogue video) in the sales area over 110 m. Here the customer has interactive access to a customer information system. The position of the sales room is not restricted by computers and peripherals, and the computer itself is protected against unauthorised access.

Individual features of the modules

Technical data			Computer module CAT-RS232-CPU	Workstation module CAT-RS232-CON
Power supply	Main	Type	external power pack	external power pack
		Connection	1 x hollow socket 2.1 mm (DCEA6)	1 x hollow socket 2.1 mm (DCEA6)
		Power supply	+5VDC/90 mA	+5VDC/70 mA
Casing	Material		Aluminium	Aluminium
	Dimensions	W x H x D desktop	55 x 104 x 24 mm	55 x 104 x 24 mm
Weight			approx. 0.1 kg	approx. 0.1 kg
Interfaces				
	for workstation	RS232	–	1 x D-sub 9 plug
	to computer	RS232	1 x D-sub 9 socket	–
	for transmission	Computer module – workstation module	1 x RJ45 socket	1 x RJ45 socket
		No. of CAT-x cables from		
		Computer module – workstation module	1	
RS232 specifications		Transmission rate 300 m	Max. 115,200 bit/s	
		Transmission rate 400 m	Max. 57,600 bit/s	
		Transmittable signals	RxD, TxD, RTS, CTS, DTR, DSR, RI, DCD	

System features

Computers per system	1
Transmission type	
Computer module – workstation module	dedicated CAT-x link
Transmission length (max.)	
Computer module – workstation module	300 m (400 m in "slow mode")
Transmission cable type	CAT-x cable
Operation environment	
Temperature	+5 to +45 °C
Air humidity	< 80 %, non-condensing
Conformity	CE, RoHS

x = 5, 6, 7

System hardware

The design of the system hardware offers a range of advantages in use, and here are just a few of those benefits as an illustration.

Area:

Connection	No installation preparations
	With the system the individual modules do not need to be switched on in a specific order
	Computer hot-plug: Computer and system modules can be connected during operation
	Stay-alive: When switching off the extender the computer remains unaffected

KVM Extender

RS232 Extender

Art. no.	Designation	
A199 0006	CAT-RS232-CPU	Computer module
A199 0007	CAT-RS232-CON	Workstation module

Connectivity

The computer connection cable of a length of 2 m is included.
Power supply cable and power packs are included as standard.
Alternative lengths are available and are priced to order.

Art. no.	Designation	Category in KVM Connectivity	Function
see	RS232-M/F-x	Serial cable	computer connection
KVM Connectivity	K-C7-x	Ready-made cable	transmission

x = length in metres, see KVM Connectivity for lengths available.

When ordering, please quote the article number and designation.

The USB extender systems form part of the KVM extender group and extend transparent USB 1.1 or USB 2.0 signals via CAT-x cable up to 100 or 50 m.

The systems consist of two main components, the computer module (transmitter) and the workstation module (receiver). The modules are interconnected via CAT-x cable.



Top view


USB 2.0 Extender
140-Set

Article no.
A199 0003



System diagram:

- 1 USB 1.1 Extender 110-CPU
- 2 USB 1.1 Extender 110-CON
- 3 Monitoring camera

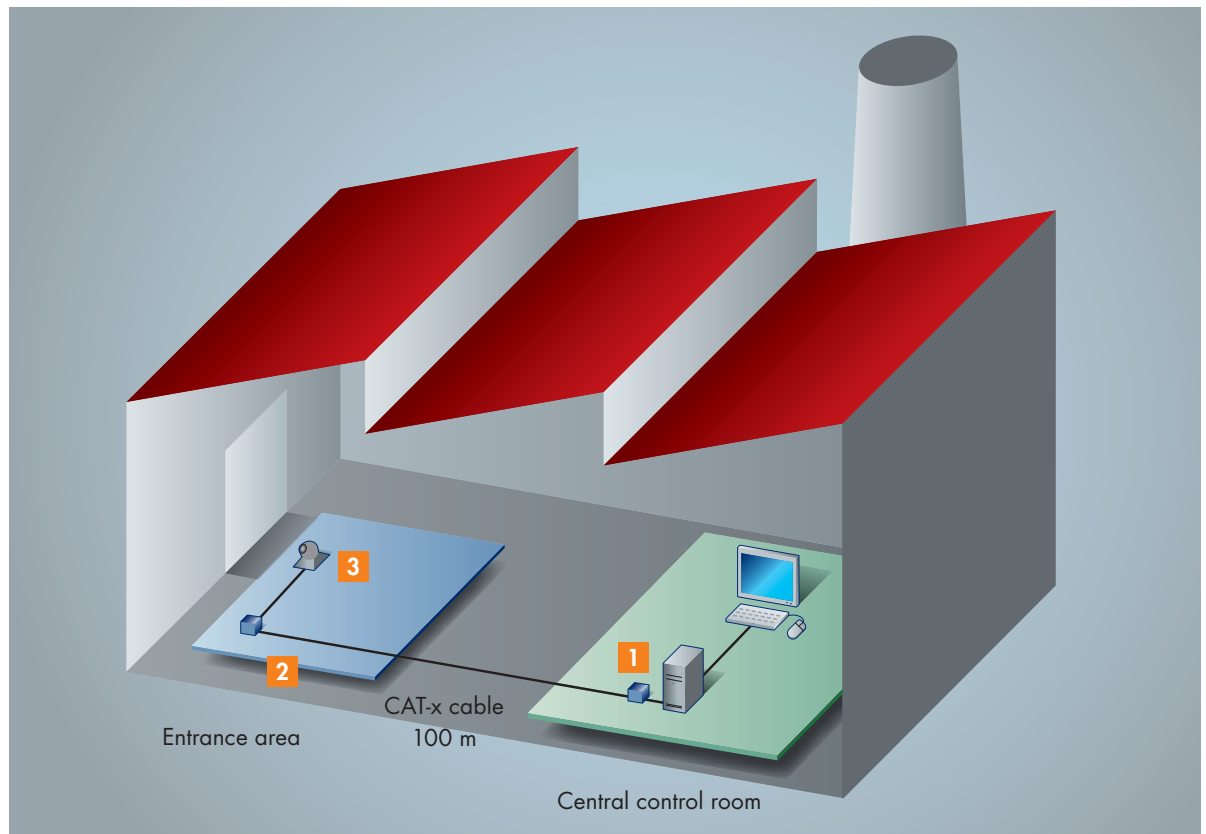

Example: USB extension for the visual monitoring of an entrance area

The entrance area of an industrial building is monitored by camera. The USB 1.1 extender extends the camera data across a distance of 100 m via CAT-x cable. This image data is monitored and processed in the central control room by computer. This means that no computer technology is required in the entrance area itself.

KVM Extender

1. USB 1.1 Extender

The USB 1.1 extender series supports the transmission of transparent USB 1.1 signals and USB 2.0 signals in accordance with the 1.1 specification.

On the workstation module there is either one (type 110) or four (type 410) interfaces available for connecting USB devices.

USB Extender-110-Set

USB Extender-410-Set

Technical data		USB Extender-110 -CPU	USB Extender-110 -REM	USB Extender-410 -CPU	USB Extender-410 -REM
Power supply	Main Type	external power pack at CPU or REM*		external power pack at CPU or REM*	
	Connection	1 x hollow socket	1 x hollow socket	1 x hollow socket	1 x hollow socket
	Power supply	+15VDC/510mA	+15VDC/500mA	+15VDC/590mA	+15VDC/2,8A
Casing	Material	Metal	Metal	Metal	Metal
	Dimensions W x H x D desktop	107 x 34 x 84 mm	107 x 34 x 84 mm	107 x 34 x 84 mm	107 x 34 x 84 mm
Weight		approx. 0,3 kg	approx. 0,3 kg	approx. 0,3 kg	approx. 0,3 kg
Operation environment					
		Temperature	+4 to +40 °C	+4 to +40 °C	+4 to +40 °C
		Air humidity	< 80 %, non-condensing	< 80 %, non-condensing	< 80 %, non-condensing
Interfaces					
for workstation		–	1 x USB-A socket	–	4 x USB-A socket
to computer		1 x USB-B socket	–	1 x USB-B socket	–
for transmission					
Computer module - workstation module		1 x RJ45 socket	1 x RJ45 socket	1 x RJ45 socket	1 x RJ45 socket
No. of CAT-x cables from		1		1	
Computer module - workstation module					
Transmission type		dedicated CAT-x link		dedicated CAT-x link	
Computer module - workstation module					
Transmission length (max.)		100 m		100 m	
Computer module - workstation module					
USB specifications		USB 1.1		USB 1.1	
		(USB 2.0 in accordance with 1.1 specification)		(USB 2.0 in accordance with 1.1 specification)	
Support		High Power devices up to 500mA		High Power devices up to 500mA	
USB transmission rate		1,5 Mbit/s low speed		1,5 Mbit/s low speed	
		12 Mbit/s full speed		12 Mbit/s full speed	
Conformity		CE, RoHS	CE, RoHS	CE, RoHS	CE, RoHS

*for connection of high power units, the connection should be made on the REM unit.

x = 5, 6, 7

2. USB 2.0 Extender

The USB 2.0 Extender series supports the transmission both of transparent USB 1.1 and USB 2.0 signals (assuming there is a USB 2.0 host controller in the computer (EHCI)).

On the workstation module there is either one (type 140) or four (type 440) interfaces available for connecting USB devices.

USB 2.0 Extender-140-Set USB 2.0 Extender-440-Set

Technical data		USB 2.0 Extender-140 -CPU	USB 2.0 Extender-140 -REM	USB 2.0 Extender-440 -CPU	USB 2.0 Extender-440 -REM
Power supply	Main Type	external power pack per module		external power pack per module	
	Connection	1 x hollow socket	1 x hollow socket	1 x hollow socket	1 x hollow socket
	Power supply	+15VDC/500mA	+15VDC/940mA	+5VDC/3A	+5VDC/3A
Casing	Material	Metal	Metal	Metal	Metal
	Dimensions W x H x D desktop	107 x 34 x 84 mm	107 x 34 x 84 mm	107 x 34 x 84 mm	114 x 38 x 106 mm
Weight		ca. 0,3 kg	ca. 0,3 kg	ca. 0,3 kg	ca. 0,3 kg
Operation environment					
		Temperature	+4 to +40 °C	+4 to +40 °C	+4 to +40 °C
		Air humidity	< 80 %, non-condensing	< 80 %, non-condensing	< 80 %, non-condensing
Interfaces					
for workstation		–	1 x USB-A socket	–	4 x USB-A socket
	to computer	1 x USB-B socket	–	1 x USB-B socket	–
for transmission					
Computer module - workstation module		1 x RJ45 socket	1 x RJ45 socket	1 x RJ45 socket	1 x RJ45 socket
No. of CAT-x cables from		1		1	
Computer module - workstation module					
Transmission type		dedicated CAT-x link		dedicated CAT-x link	
Computer module - workstation module					
Transmission length (max.)		50 m		50 m	
Computer module - workstation module					
USB specifications		USB 1.1		USB 1.1	
		USB 2.0		USB 2.0	
Support		High Power devices up to 500mA		High Power devices up to 500mA	
USB transmission rate		1,5 Mbit/s low speed 12 Mbit/s full speed 480 Mbit/s full speed		1,5 Mbit/s low speed 12 Mbit/s full speed 480 Mbit/s full speed	
Conformity		CE, RoHS	CE, RoHS	CE, RoHS	CE, RoHS

x = 5, 6, 7

KVM Extender

System hardware

The design of the system hardware offers a range of advantages in use, and here are just a few of those benefits as an illustration.

Area:

Connection	No installation preparations
	With the system the individual modules do not need to be switched on in a specific order
	Computer hot-plug: Computer and system modules can be connected during operation
	Stay-alive: When switching off the extender the computer remains unaffected

USB Extender

Art. no.	Designation	
A199 0001	USB Extender-110-Set	2 x USB 1.1-110 Extender (transmitter and receiver)
A199 0002	USB Extender-410-Set	2 x USB 1.1-410 Extender (transmitter and receiver)
A199 0003	USB 2.0 Extender-140-Set	2 x USB 2.0-140 Extender (transmitter and receiver)
A199 0009	USB 2.0 Extender-440-Set	2 x USB 2.0-440 Extender (transmitter and receiver)

Connectivity

The computer connection cable of a length of 2 m is included.
Power supply cable and power packs are included as standard.

Art. no.	Designation	Category in KVM Connectivity	Function
see	USB-AM/BM-x	USB cable	computer connection
KVM Connectivity	K-C7-x	Ready-made cable	transmission

x = length in metres, see KVM Connectivity for lengths available.

When ordering, please quote the article number and designation.

LEGEND

Equipment features:



= USB

The AudioTransceiver system forms part of the group of KVM extenders. Depending on cable quality it extends and amplifies audio signals in stereo/CD quality via CAT-7 crossover cable up to 600 m.

The system consists of two main components; the computer module (transmitter) and the workstation module (receiver). The modules are interconnected via CAT-7 crossover cable.



Front view



Rear view




AudioTransceiver Set

Article no.
A199 0005

System diagram:

- 1** AudioTransceiver - transmitter
- 2** AudioTransceiver - receiver

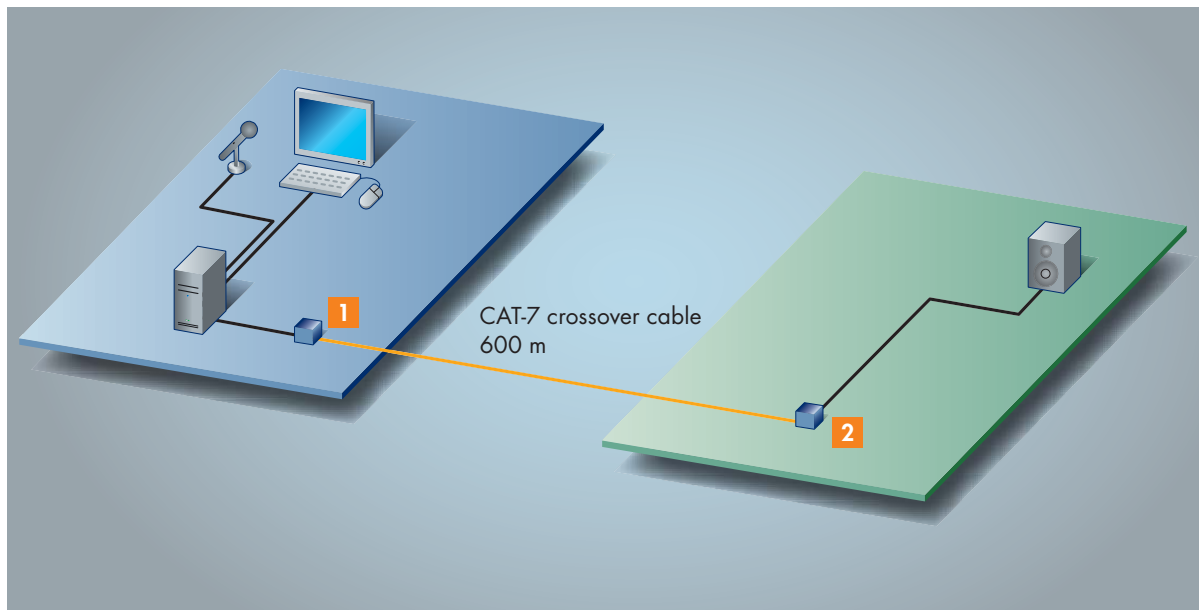

Example: Central announcements

Acoustic signals or announcements can be transmitted via the AudioTransceiver up to 600 m via CAT-7 crossover cable. Applications for this are to be found in the areas of control centres or retail, for example

KVM Extender

Technical data		AudioTransceiver
Computer per system		1
	Transmission type	
	Computer module – workstation module	dedicated CAT-7 crossover- cable connection
	Transmission length (max.)	600 m
Power supply	Computer module – workstation module	CAT-7 crossover cable
	Transmission cable type	
	Main Type	external power pack
	Connection	1 x hollow socket
Casing	Power supply	+5VDC/160 mA
	Material	Aluminium
Weight	Dimensions	103 x 36.5 x 107 mm
	W x H x D desktop	approx. 0.2 kg
Operating environment		
Air humidity	Temperature	+5 to +45 °C
	Air humidity	< 80 %, non-condensing
Interfaces and specifications		
for workstation	Audio	3 x 3.5 mm jack (line in, line out, micro in)
	to computer	3 x 3.5 mm jack (line in, line out, micro in)
Transmission	Computer module – workstation module	1 x RJ45 socket
	No. of CAT-7 crossover cables from	
Audio specifications	Computer module – workstation module	1
	Resolution	18 bit digital
	Sampling rate	48 kHz
	Bandwidth	22 kHz
	Microphone pre-amplification	20 dB
Conformity		CE, RoHS

LEGEND

Equipment features:



= Audio

System hardware

The design of the system hardware offers a range of advantages in use, and here are just a few of those benefits as an illustration.

Area:

Connection	No installation preparations
	With the system the individual modules do not need to be switched on in a specific order
	Computer hot-plug: Computer and system modules can be connected during operation
	Stay-alive: When switching off the extender the computer remains unaffected

AudioTransceiver

Art. no.	Designation	
A199 0005	AudioTransceiver set	2 x AudioTransceiver (transmitter and receiver)

Connectivity

The computer connector cable and a crossover cable are included (length 2 m).

Power supply cable and power packs are included as standard.

Alternative lengths are available and are priced to order.

Art. no.	Designation	Category in KVM Connectivity	Function
see	Audio-M/M-x	Audio cable	computer connection
KVM Connectivity	K-C7C-M/M-x	Ready made cable	crossover pin assignment
	K-C7-LD-x	Ready made cable	transmission

x = length in metres, see KVM Connectivity for lengths available.

When ordering, please quote the article number and designation.

KVM Extender

The VideoSplitter 2plus forms part of the group of KVM Extenders and extends analogue video signals via multi-coax cable up to 110 m.

The VideoSplitter 2plus is a standalone unit.

The unit also permits the doubling of the video signal from a computer.

VideoSplitter 2plus

The unit transmits the analogue video signal.

There are two possible VideoSplitters 2plus applications:


1. Operation of two local monitors
2. Operation of one local and one remote monitor or beamer for which the video signal is amplified.

The amplification can be infinitely adjusted for the relevant distance.



Rear view

Article no.
A400 0001

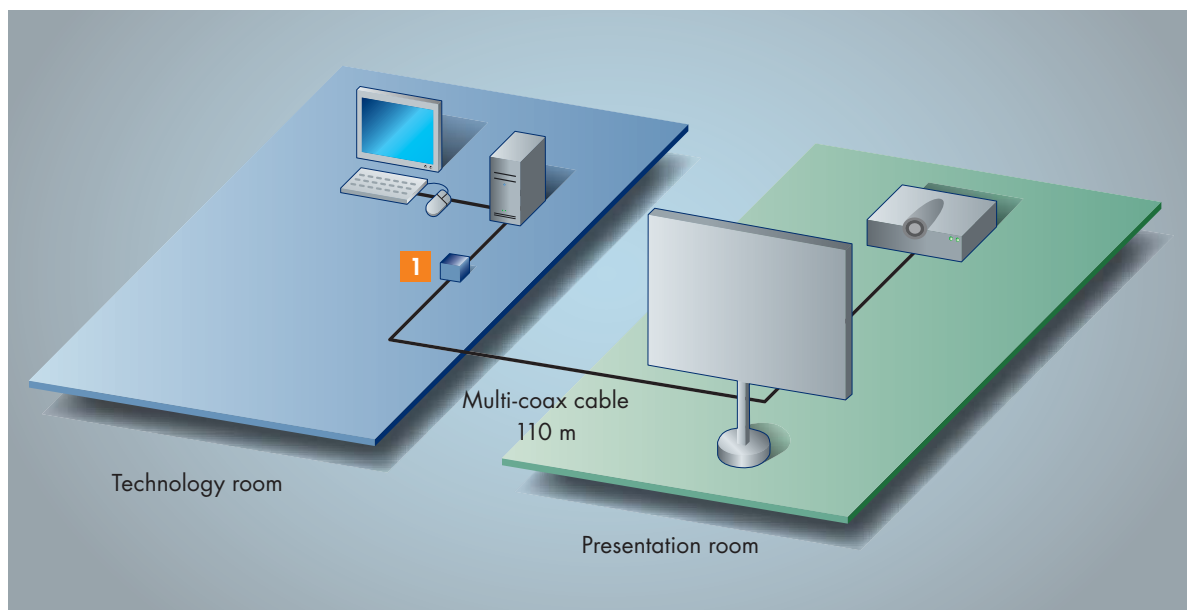

System diagram:

1 VideoSplitter 2plus

Example: Video extension from the technology room to the presentation room

The computer is located in an air-conditioned, access-protected technology room.

The VideoSplitter 2plus extends the computer's analogue video signals from the technology room to the presentation room via 110 m multi-coax cable.

The presentation room is not overloaded with computers and peripherals, the audience is not exposed to the computer emissions and the computer itself is protected against unauthorised access.

Technical data		VideoSplitter 2plus
No. of monitors		2 (1 x local, 1 x remote)
Computers per unit		1
Signal type/video		analogue video
Resolution		up to 1600 x 1200 @ 85 Hz
Transmission type	Unit – monitor	dedicated multi-coax connection
Transmission length (max.)	Unit – monitor	110 m depending on resolution
Transmission cable type		Multi-coax cable
Operation via		infinitely variable amplification via rotary regulator
Power supply	Main Type	external power pack
	Connection	1 x hollow socket
	Power supply	+9VDC/150 mA
Casing	Material	Aluminium
	Dimensions W x H x D desktop	103 x 36.5 x 107 mm
Weight		approx. 0.2 kg
Operating environment		
	Temperature	+5 to +45 °C
	Air humidity	< 80 %, non-condensing
Interfaces		
for workstation to computer	Monitor	2 x D-sub HD 15 socket
	Video	1 x D-sub HD 15 socket
	No. of multi-coax cable from unit – monitor	1
Conformity		CE, RoHS

Expansion

By cascading units of the same type, the number of monitors that can be connected can be increased.

LEGEND

Equipment features:



= Analogue video

KVM Extender

System hardware

The design of the system hardware offers a range of advantages in use, and here are just a few of those benefits as an illustration.

Area:

Video	VGA resolutions up to 1600 x 1200 @ 85 Hz can be selected
	Infinitely variable video amplification possible for remote monitor/beamer
Connection	No installation preparations
	Computer hot-plug: The computer and extender can be connected during operation
	Stay-alive: When switching off the extender, the computer remains unaffected
Expansion	By cascading units of the same type, the number of monitors that can be connected can be increased.

VideoSplitter 2plus

Art. no.	Designation
A400 0001	VideoSplitter 2plus

Connectivity

The computer connection cable of a length of 2 m is included.
Power supply cable and power packs are included as standard.
Alternative lengths are available and are priced to order.

Art. no.	Designation	Category in KVM Connectivity	Function
see	VGA-M/M-x	VGA cable	computer connection
KVM Connectivity	V-KMVL-M/F-x	Ready-made cable	transmission up to 50 m
	KMC-M/F-x	Ready-made cable	transmission over 51 m

x = length in metres, see KVM Connectivity for lengths available.
When ordering, please quote the article number and designation.

The system FireWire-800 Transceiver

The FireWire-800 Transceiver system forms part of the group of KVM extender and extends signals in accordance with protocol IEEE1394b via optical fibre (2 fibres) up to 500 m.

The system consists of two main components; the computer module (transmitter) and the workstation module (receiver). The modules are interconnected via optical fibre.



Front view

The FireWire-800 Transceiver computer and workstation modules transmit bidirectional signals in accordance with protocol IEEE1394b-2002 - also downward-compatible with IEEE 1394a-2000 and -1995.

The computer and workstation modules are units with the same design and can be used interchangeably.


FireWire-800 Transceiver

Article no.
A199 0004



System diagram:

- 1** FireWire-800 Transceiver
- 2** Industrial camera

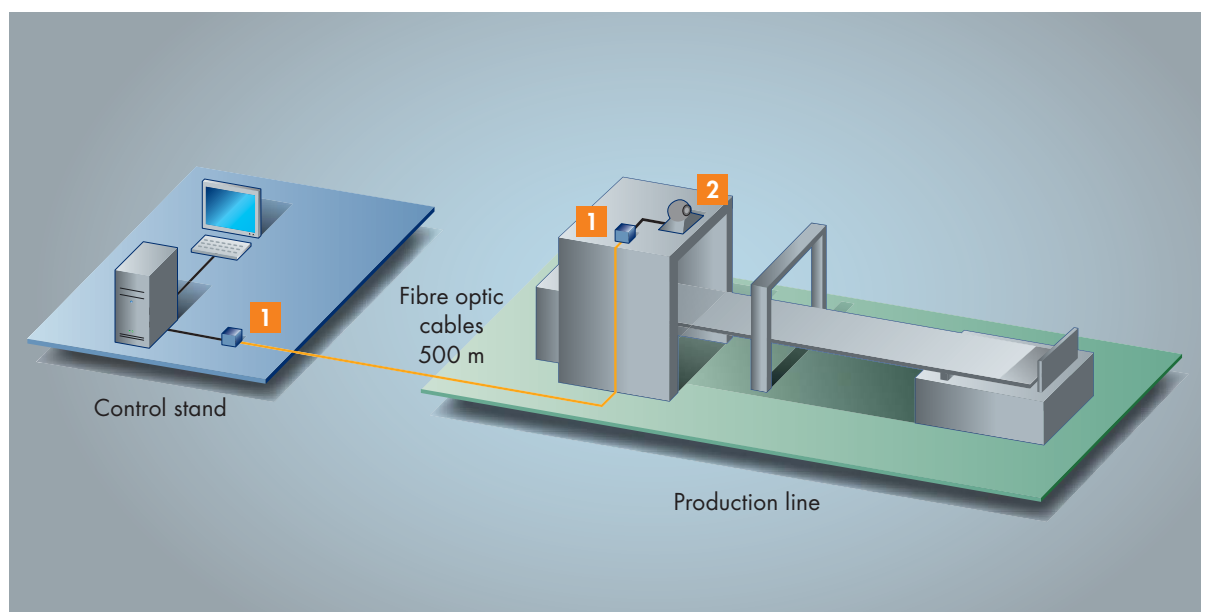

Example: FireWire extension from machine control stand to production line for visual process monitoring

The production line is monitored using an industrial camera.

The FireWire-800 transceiver extends the camera data across a distance of 500 m via fibre optic cable to the control stand.

At the control stand workstation the image data is monitored and processed by computer.

The operator and computer do not need to be exposed to the production environment.

The fibre optic transmission is not susceptible to interference from the environment.

KVM Extender

Technical data		FireWire-800 Transceiver
Computer per system		1
Transmission type	Computer module – workstation module	dedicated fibre optic connection
Transmission length (max.)	Computer module – workstation module	500 m
Transmission cable type		2 multimode fibres (50 µm)
Power supply	Main Type	external power pack
	Connection	1 x hollow socket
	Power supply	+12VDC/1.0A
Casing	Material	Metal
	Dimensions W x H x D desktop	101 x 24 x 91 mm
Weight		approx. 0.3 kg
Operating environment		
	Temperature	+0 to +50 °C
	Air humidity	< 80 %, non-condensing
Interfaces and specifications		
	for workstation	1 x bilingual socket (9)
	Computer	1 x bilingual socket (9)
	Transmission Computer module – workstation module	1 x LC duplex socket
	Specifications Protocols	IEEE 1394b 2002 IEEE 1394a 2000 + 1995
	Transmission rate max.	800 Mbit/s
Conformity		CE, RoHS

Order list

Art. no.	Designation	
A199 0004	FireWire-800 Transceiver-Set	2 x FireWire-800 Transceiver (transmitter and receiver)

Connectivity

Computer connection cable of 0.7m in length are included.
Power supply cable and power packs are included as standard.

Art. no.	Designation	Category in KVM Connectivity	Function
see KVM Connectivity	K-LwLm-LCD-x	Ready-made cable	transmission

x = length in metres, see KVM Connectivity for lengths available.
When ordering, please quote the article number and designation.

LEGEND

Equipment features:











= FireWire-800



Your KVM application – Your trusted partner

**Profit from our solutions expertise,
from planning through to support!**

-  **KVM Extender**
-  **KVM Sharing**
-  **KVM Switches**
-  **KVM Matrix switches**
-  **KVM IP Access**
-  **Power Switches**
-  **KVM Connectivity**
-  **KVM Add-On**

Guntermann & Drunck GmbH
Dortmunder Straße 4a
D-57234 Wilnsdorf, Germany

Telephone +49 (0) 2739 8901-100
Fax +49 (0) 2739 8901-120

sales@GDsys.de

www.GDsys.de