

# **FIRMWARE UPGRADABLE AUDIO&MIC + USB HOTKEYS USING SLIM USB PS/2 KVM CABLE**

## **2-port USB PS/2 KVM Switch w/ Audio&Mic + Console USB & PS/2 support**

### UCF-002A

### 2-port USB PS/2 KVM Switch w/ Audio&Mic

The UCF-002A is a 2-port USB PS/2 KVM Switch with Audio and Microphone switching function. It allows you to control two multimedia computers using either PS/2 or USB keyboard, mouse, monitor and a set of speakers and microphone.

#### **USB and PS/2 Dual interface connectivity support on both console side and PC side**

The UCF-002A offers dual interface connectivity support for both USB and PS/2 interface on both console side and computer side.



#### **Audio and Microphone Switching offers you uninterrupted multimedia experience with KVM Switching**

The audio and microphone switching function allows you to leverage the multimedia systems on each of your multiple computers. You can monitor the audio/mic input/output of each of your computers without plugging on and off the audio/mic cables. And it allows independent switching of computer and audio/mic channels and so that you can keep listening to your favorite audio files without being interrupted by KVM switching.

#### **Multi-platform support for PC and Macintosh**

The UCF-002A offers multi-platform support for PC, Macintosh G3/G4, iMAC, PowerBook and allows you to access, control, boot and reboot multiple multimedia computers using only one keyboard, video, mouse and a set of speakers and microphone.

#### **Slim USB PS/2 KVM Cable for ultra-convenience**

The UCF-002 features the Slim USB PS/2 KVM cabling technology to save you troubles in changing KVM cables for USB or PS/2 interface. It just uses the same Slim KVM cables to connect to either USB or PS/2 interface by removal/addition of a simple USB-to-PS/2 adapter. You don't have to prepare different KVM cables while changing the connection interface.




#### **Firmware Upgradable**

This KVM Switch allows its user to upgrade firmware contents whenever is needed to enhance the compatibility to other devices or its functions and performance. With the firmware upgrade feature, your investment on the KVM Switch is further ensured and its life-time value just maximized

### Features

- 2-port USB PS/2 KVM switch with audio and microphone switching
- Slim USB PS/2 KVM Cable for both PS/2 and USB interface connectivity
- PS/2 & USB Keyboard and mouse support
- USB & PS/2 keyboard hotkey support
- UHCI, OHCI USB interface support
- Independent/simultaneous audio/mic channel and PC port selection
- Support for Windows 98/SE/ME/2000/XP/Vista and Linux, Sun Solaris, Mac OS
- Multi-platform support for PCs and Macintosh G3/G4 MACs, iMACs, PowerBook, Sun (with USB).
- Computer selection switching by front-panel push buttons and keyboard hotkeys
- LED indicators for easy status monitoring
- Buzzer sound for port switching confirmation
- High video resolution up to 2048 x 1536
- Firmware upgradable

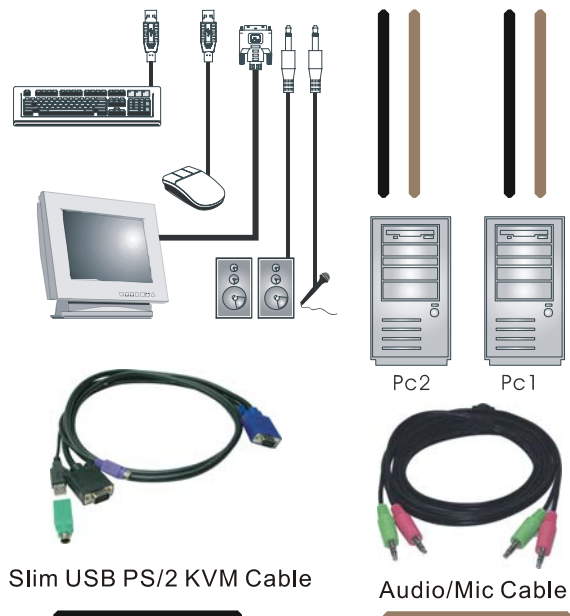

## Specifications

Model No.	UCF-002A
PC Connections	2
Console Connections	1
PC Port Connectors	2 x VGA HDB 15-pin female 2 x 3.5mm audio in/out receptacle 2 x 3.5mm mic in/out receptacle
Console Port Connectors	2 x USB 1.1 Type A for Keyboard/Mouse 1 x PS/2 Keyboard 6-pin Mini Din female 1 x PS/2 Mouse 6 pin Mini Din female 1 x VGA HDB 15 pin female 1 x 3.5mm audio in/out receptacle 1 x 3.5mm mic in/out receptacle
PC selection	Hotkey / Push buttons
PC port LED	2
Scan delay time	Programmable 5 ~ 99 sec
Keyboard/Mouse conversion	USB and PS/2
VGA Resolution	2048 x 1536
Power Type	PS/2, USB interface power
Power Adapter	DC 5V 2A
Operation Temperature	0 ~ 40°C
Size	Desktop
Housing	Metal + Plastic front-panel
Dimension (L x W x H)	165 × 103.5 × 45 mm
Safety / Emission	FCC, CE