


REV	DESCRIPTION	SIGNATURE	DATE
0	ORIGIN		2021. 01. 11

TABLE A

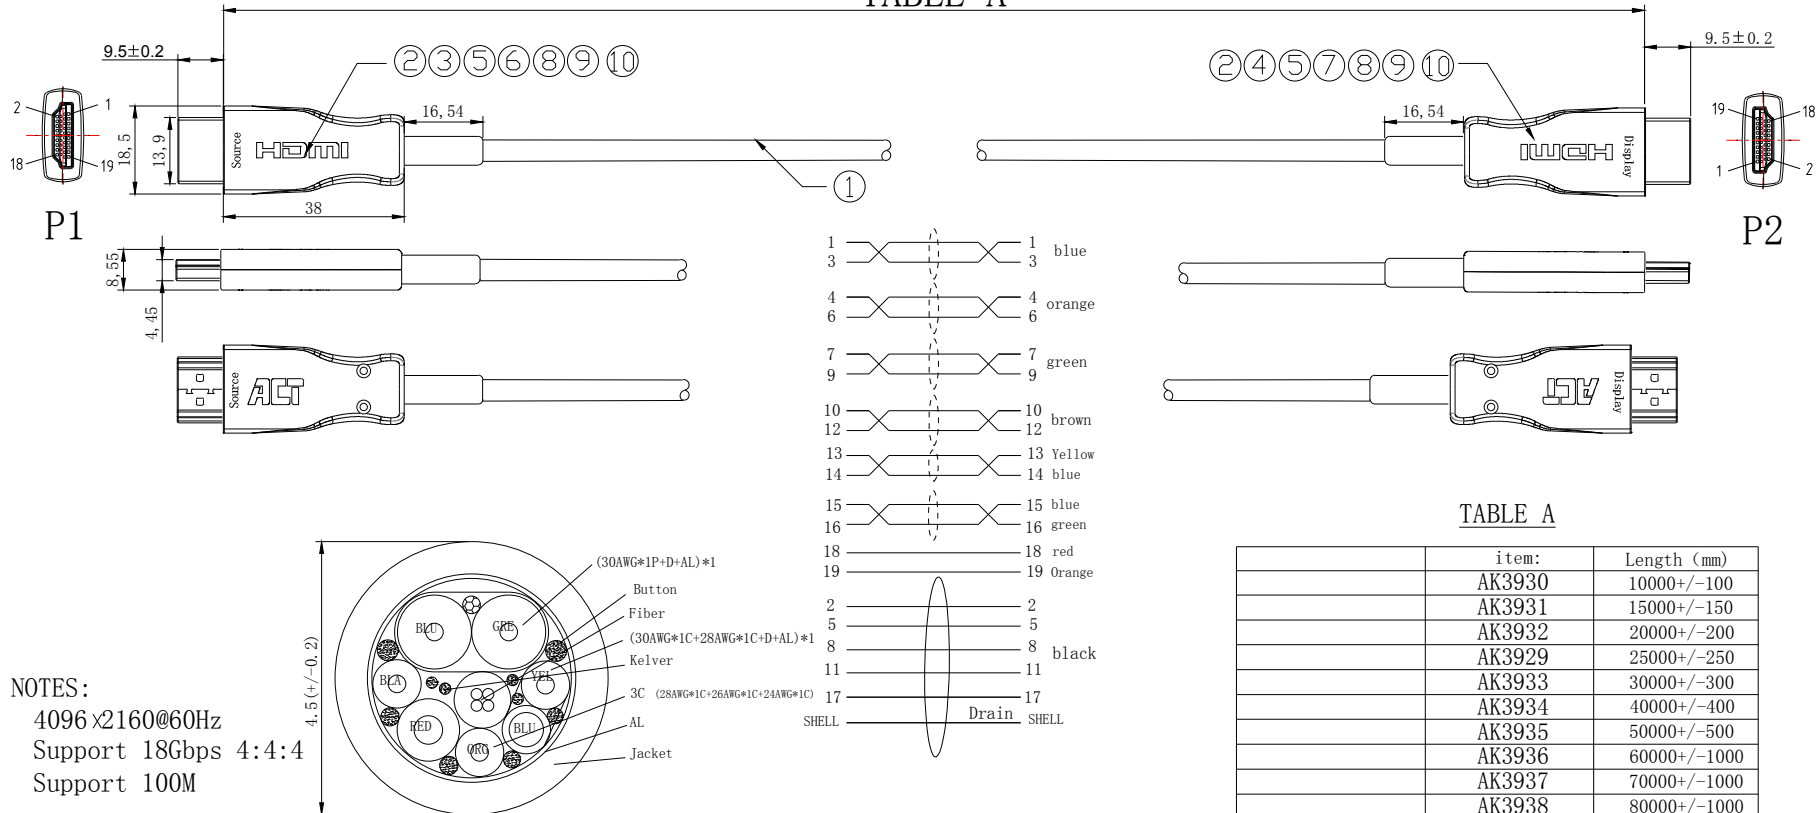

NOTES:
4096x2160@60Hz
Support 18Gbps 4:4:4
Support 100M

TABLE A

item:	Length (mm)
AK3930	10000+/-100
AK3931	15000+/-150
AK3932	20000+/-200
AK3929	25000+/-250
AK3933	30000+/-300
AK3934	40000+/-400
AK3935	50000+/-500
AK3936	60000+/-1000
AK3937	70000+/-1000
AK3938	80000+/-1000
AK3939	90000+/-1000
AK3940	100000+/-1000

ACT

1	0	Screw	8	P C S	CUSTOMER P/N:
9		Metal	2	P C S	
8		Plug SR	2	P C S	
7		HDMI Head shell (lower shell) HDMI A plug Bottom Shell(Display)	1	P C S	
6		HDMI A Head shell (lower shell) HDMI A plug Bottom Shell(Source)	1	P C S	TYPE:HDMI 2.0 Active Optical Cable
5		HDMI A Head shell (upper shell) HDMI A plug Up Shell	2	P C S	
4		HDMI A PCBA (Display)	1	P C S	DRAW:
3		HDMI A PCBA (Source)	1	P C S	PAPT NO:
2		HDMI A Male plug gold-plated HDMI A Pin Male Gold-plating	2	P C S	CKD:
1		(30AWG*1P+D+AL)*1+(30AWG*1C+28AWG*1C+D+AL)+28AWG*1C+26AWG*1C+24AWG*1C +Fiber*4C+F+AL OD:4.5±0.2mm	TABLE A	m m	CUSTOMER:
ITEM		SPECIFICATIONS	Q' TY	UNIT	UNIT:
					APP:
					DWG NO:
					REV:0
					SHELL:1/1
					DATE:2021. 01. 11