

PA-M01



KTI panel Antennas are designed to enhance sending and receiving wireless signal horizontally and vertically in the front end. While capable of offering highly reliable performance, they are yet economical antennas designed for 2.4GHz ISM band, including common 802.11b and 802.11g Access Points.

Key Features

- Solid 12dBi signal enhancement
- Swivel installation kit included
- Light weighted design
- Enhance front end wireless signal horizontally and vertically
- Designed for 2.4 GHz wireless Access Points
- Durable commercial design to operation in extreme environment

Specifications

Type: Panel Antenna Linear: V or H

Frequency: 2400 ~ 2483.5 MHz

Impedance: 50ohm VSWR: Less than 1.5

Gain: 12dBi

Connector: N-Type female Power handling: 20 Watt **Dimension:** 166 x 140 x 30mm Weight: 410g (w/ swivel base unit) Operation temperature: -30°C ~ +60°C




Tel: 886-2-2698-3878 Fax: 886-2-2698-3873 E-mail: kti@ktinet.com.tw URL: http://www.ktinet.com.tw

KTI Networks Inc.

7400 Harwin Dr. Suite 120 Houston, Texas, 77036 U.S.A.

Tel: 713-266-3891 Fax: 713-266-3893 E-mail: kti@kti.com URL: http://www.ktinet.com

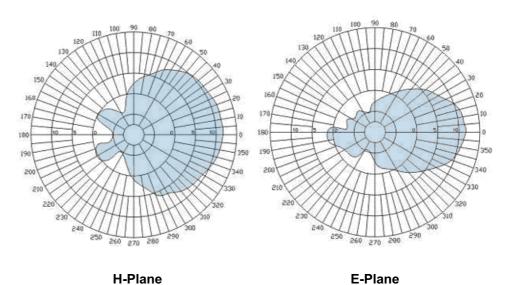

H-Plane