
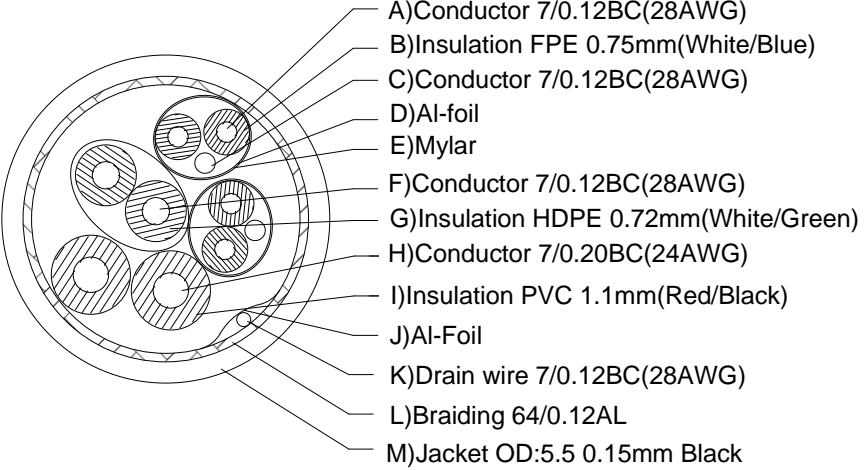
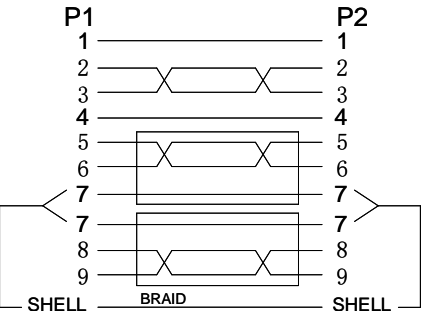



ACT Connectivity Solutions – Koolhovenstraat 1E – 3772MT – Barneveld – The Netherlands

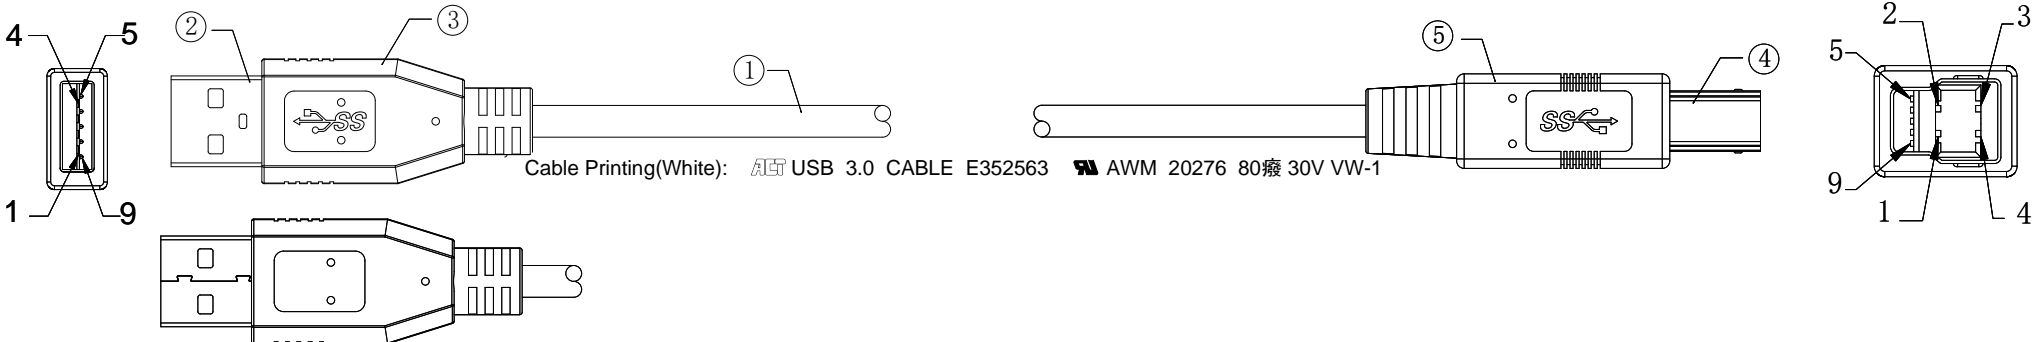

Item No.	Length
SB3016	0.5m
SB3017	1.0m
SB3019	2.0m
SB0003	3.0m
SB0004	5.0m

ITEM	PART	DESCRIPTION
1	Cable	[(7/0.12BC+FPE)*1P+D+AL+Mylar]*2C+(7/.012BC+HDPE)*1P + (7/0.20BC+PVC)*2C+7/0.12BC+AL+D+B "+OD5.5PVC Black
2	Connector type	USB 3.0 A Male w/ Can-Shieling, Nickel-Plated
3	External Mold	Outer Mould 35P PVC, Black
4	Connector type	USB 3.0 B Male, Nickel-Plated
5	External Mold	Outer Mould 35P PVC, Black

Remark
1. 100% Open/Short Test
2. Conductive Resistance:10 ohms MAX
3. Insulation Resistance:5M ohm MIN.
4. The product is Reach/RoHS compliant.



USB 3.2 Gen1 A male - USB B male

Revision : 02

Date : 20-11-2024

This drawing is proprietary information of ACT Connectivity Solutions and confidential and provided to you for internal use on a need to know basis only. This document may not be duplicated for or disseminated to any third party without the prior explicit written consent of ACT Connectivity Solutions. Copies of this document, Printed or electronic, are uncontrolled and intended only for immediate use.

Drawn by : MR