

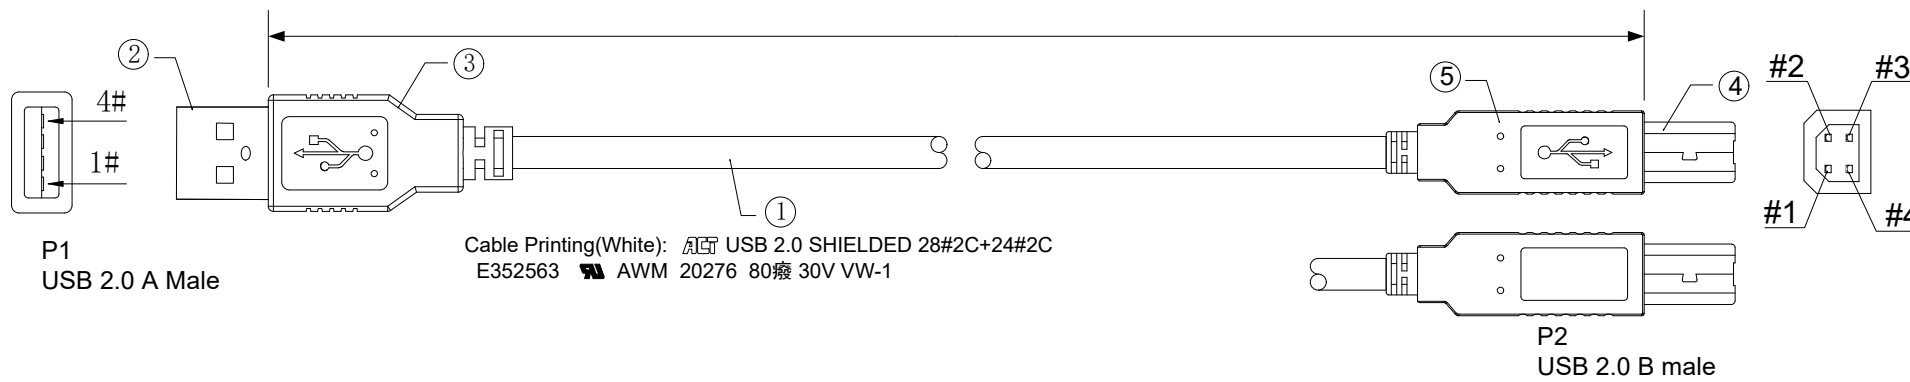
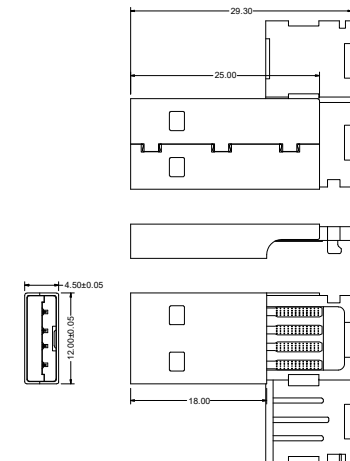


8 7 6 5 4 3 2 1

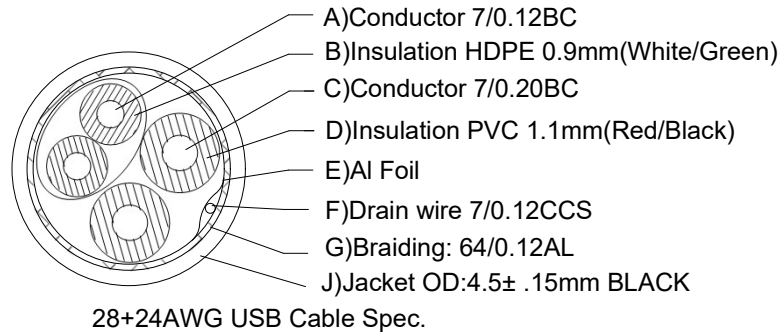

CONNECTION

USB A/M

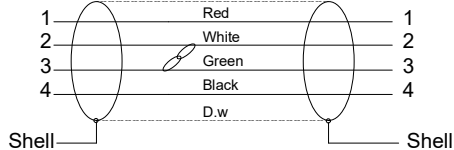

Item No.	Length (mm)
SB2398	500±20mm
SB2401	1000±20mm
SB2402	1800±20mm
SB2403	3000±20mm
SB2405	5000±20mm

ITEM	PART	DESCRIPTION
1	Cable	28+24 USB Cable OD:4.5mm 28+24 (7/.012BC+HDPE)*1P + (7/0.20BC "+PVC)*2C+7/0.12CCS+64/0.12ALB "+OD4.5PVC BLACK
2	Connector type	USB A Male, Nickel-Plated
3	External Mold	Outer Mould 45P PVC, Black
4	Connector type	USB B Male, Nickel-Plated
5	External Mold	Outer Mould 45P PVC, Black

Remark
1. 100% Open/Short Test
2. Conductive Resistance:10 ohms MAX
3. Insulation Resistance:5Mohm MIN.
4. The product is Reach/RoHS compliant.



Drawn by : MR

USB 2.0 A male - USB B male

Revision : 02

17-12-2024

This drawing is proprietary information of ACT Connectivity Solutions and confidential and provided to you for internal use on a need to know basis only. This document may not be duplicated for or disseminated to any third party without the prior explicit written consent of ACT Connectivity Solutions. Copies of this document, Printed or electronic, are uncontrolled and intended only for immediate use.

8 7 6 5 4 3 2 1