

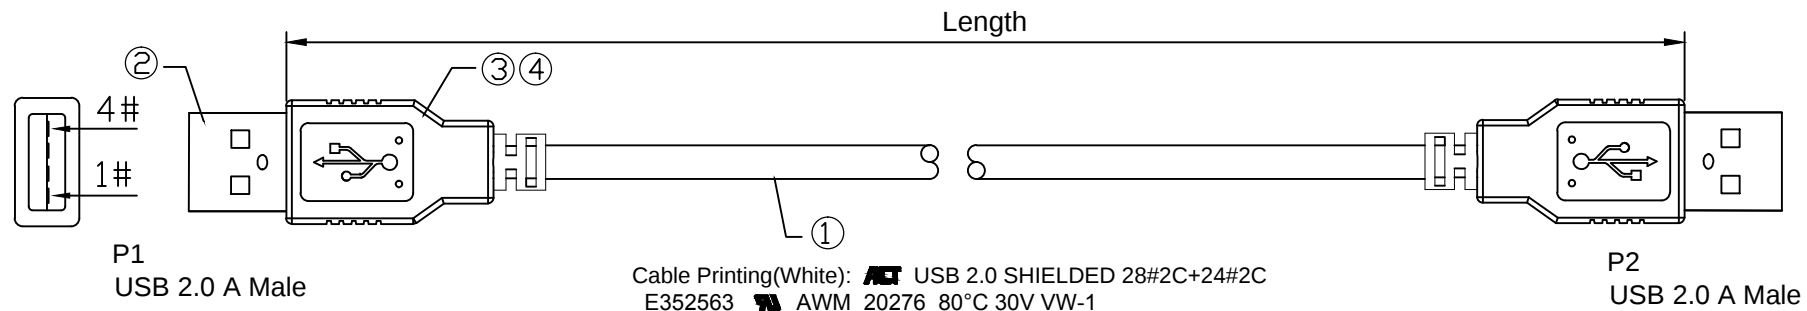


REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2021/01/27	

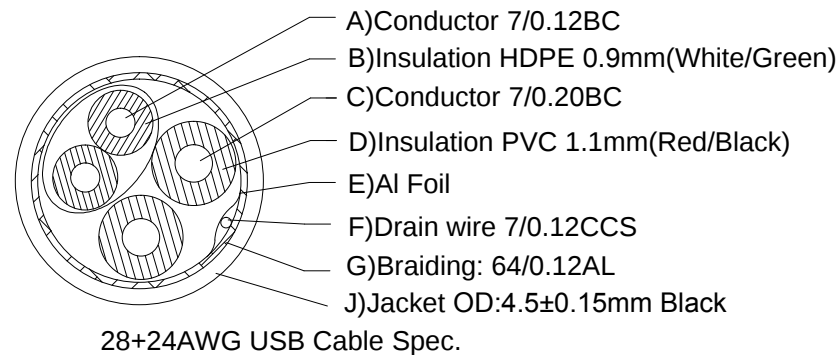

Remark:

- 1.100% Open/Short Test
2. Conductive Resistance: 10ohms MAX
3. Insulation Resistance: 5M ohm MIN.
4. The product is Reach/RoHS compliant.

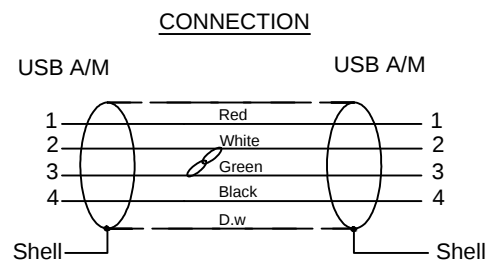


Item NO.	Length(m)
SB2520	1.8m
SB2530	3.0m
SB2550	5.0m

③	External Mold	Outer Mould 45P PVC, Black	2PCS	
②	Connector	USB A Male, Nickle-Plated	2PCS	
①	Cable	28+24 USB Cable OD:4.5mm 28+24 (7/0.12BC+HDPE)*1P + (7/0.20BC +PVC)*2C+7/0.12CCS+64/0.12ALB +OD4.5PVC Black		
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK

TOLERANCES UNLESS OTHERWISE STATED
X. = ± 1
.X = ± 0.2
.XX = ± 0.1



ACT			
ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION		PAGE NO	1/1
28+24 USB A Male TO A Male		DATE	2021/01/27
APPROVAL		CHECKED	
		DRAWN	

REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2021/01/27	

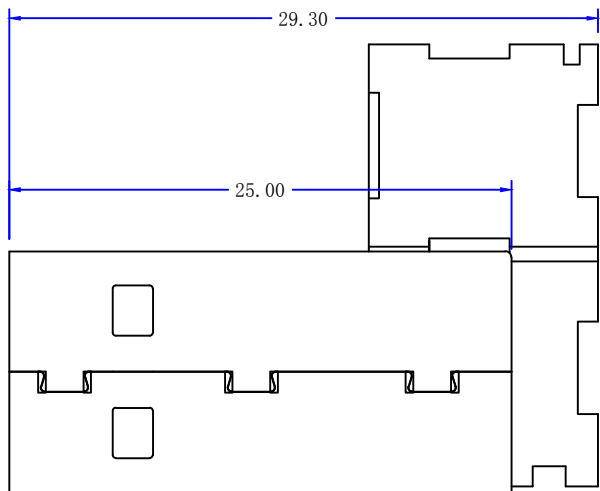

Remarks:

1. "*" is the key inspection dimension, which must meet the requirements of engineering drawing.
2. The terminal material is H62, nickel plating 50μ, tin 100μ.
3. The shell material is SPCC SD, nickel plating 80μ, copper bottom 80μ, salt spray 24H.
4. Times of insertion and extraction: 3000 Cycles.
5. Pins gold-plated: 1μ

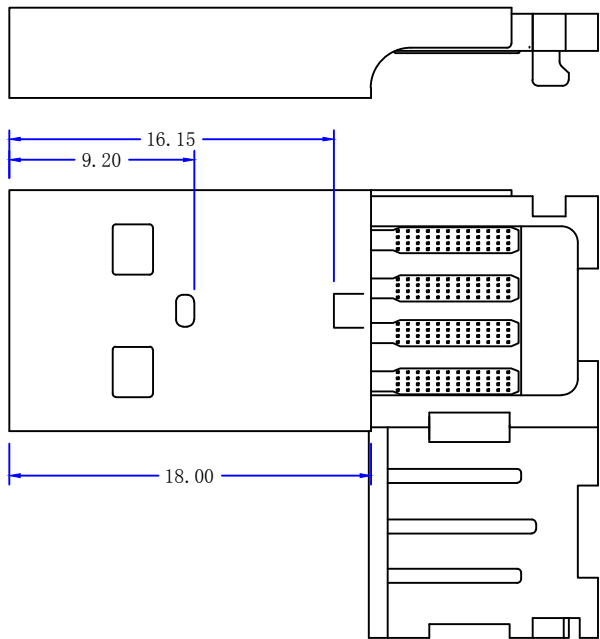**ACT**

ERP NO.:		SAMPLE DWG NO:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	28+24 USB A Male TO A Male	PAGE NO	1/1
		DATE	2021/01/27
APPROVAL		CHECKED	
		DRAWN	