H/P DB68P MALE

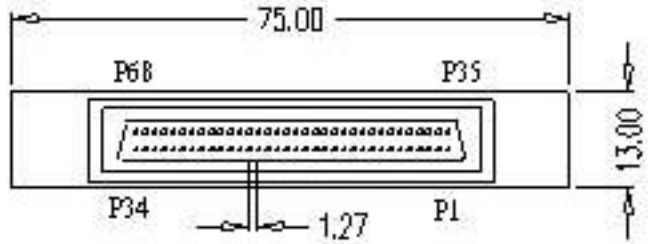

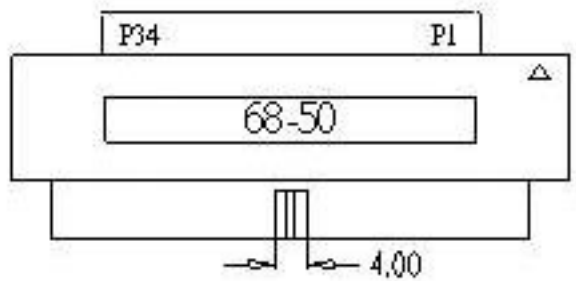

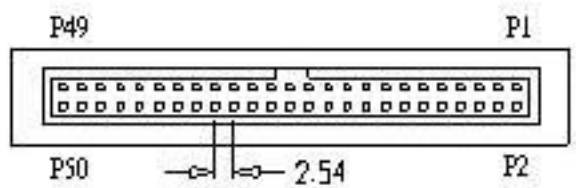

IDC 50P PLUG

PIN IDC50(M)	OUT DB68P(M)
1	6
3	7
5	8
7	9
9	10
11	11
13	12
15	13
17	14
19	15
21	16
23 NC	17
25 NC	18
27	19
29	20
31	21
33	22
35	23
37	24
39	25
41	26
43	27
45	28
47	29
49	30
2	40
4	41
6	42
8	43
10	44
12	45
14	46
16	47
18	48
20	49
22	50
24 NC	51
26	52
28	53
30	54
32	55
34	56
36	57
38	58
40	59
42	60
44	61
46	62
48	63
50	64

MATERIAL & FINFSH

H/P DB68 MALE CONNECTOR

1 INSULATOR: PBT UL94V-0
2 VOLTAGE RATING: AC 250V
3 CURRENT RATING: 1 Amp
4 CONTACT RESISTANCE: 35 m Ohm Max
5 INSULATION RESISTANCE: 1000M Ohm Min
6 OPERATING TEMPERATURE: -55° C ~ +105° C
7 SIZE: mm

IDC 50P PLUG 2.54 mm CONNECTOR

1 HOUSING: PBT UL94V-0
2 CURRENT RATING: 1 Amp
3 VOLTACT: AC 500V
4 CONTACT RESISTANCE: 35 m Ohm Max
5 INSULATION RESISTANCE: 1000M Ohm Min
6 OPERATING TEMPERATURE: -55° C ~ +105° C
7 SIZE: mm

NOTES:
1. H/P DB68P MALE TO IDC 50P PLUG
2. COLOR: BLACK
3. W/COVER
4. PACKAGE: BLISTER CARD & SPECIAL CARTON SIZE(46X30X25cm)

REV	DESCRIPTION	DATE	ECN NO.
1-0		MAR-24-2000	

DWG NAME:	H/P DB68P W TO 50P IDC PLUG ADAPTOR		
C. W. NO:	A5303APA-06	CUS ID:	
CUS NO		DWG. NO:	A5303APA-06
SHEET: 1/1	TOLERANCE: .X ___ .XX ±0.40	UNIT:	mm
		DRAW. BY:	
	SCALE: 1:1	CHECKED	

For internal use only!!!