



J1-H/P DB68P FEMALE

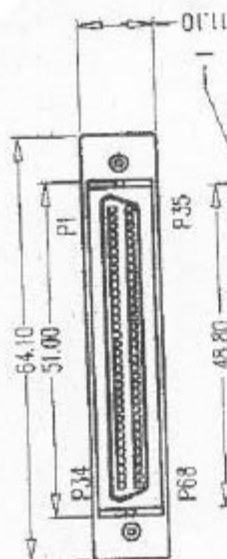

J2-H/P DB68P FEMALE

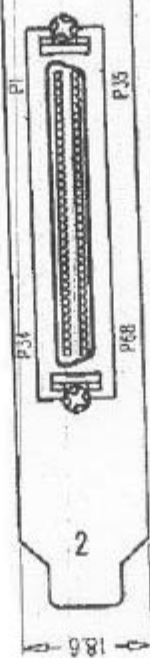

NOTES:

- 1.H/P DB68P FEMALE
- 2.P.C.B.:FR/4
- 3.PANEL:PC PANEL
- 4.H/P DB68P FEMALE (PITCH=1.27mm)
- 5.LATCH LOCK

- 100% OPEN/SHORT/INSULATING TEST
- INSULATION TEST:5MΩ

PIN		OUT	
J1	J2	J1	J2
1	35	35	35
2	36	36	36
3	37	37	37
4	38	38	38
5	39	39	39
6	40	40	40
7	41	41	41
8	42	42	42
9	43	43	43
10	44	44	44
11	45	45	45
12	46	46	46
13	47	47	47
14	48	48	48
15	49	49	49
16	50	50	50
17	51	51	51
18	52	52	52
19	53	53	53
20	54	54	54
21	55	55	55
22	56	56	56
23	57	57	57
24	58	58	58
25	59	59	59
26	60	60	60
27	61	61	61
28	62	62	62
29	63	63	63
30	64	64	64
31	65	65	65
32	66	66	66
33	67	67	67
34	68	68	68

1-0	AP792	DEC-10-1999	1715
REV	DESCRIPTION	DATE	ECN NO.
Dwg NAME: H/P DB68P FEMALE TO FEMALE ADAPTER G. W. NO: ASSHOGA-06 CUS. ID: Dwg. NO: ASSHOGA-08 CUS. NO: TOLERANCE: X XX 30.00 UNIT: mm SHEET: 1/1 DRAW. BY: CHECKED: 王學川 SCALE: 1:1			