

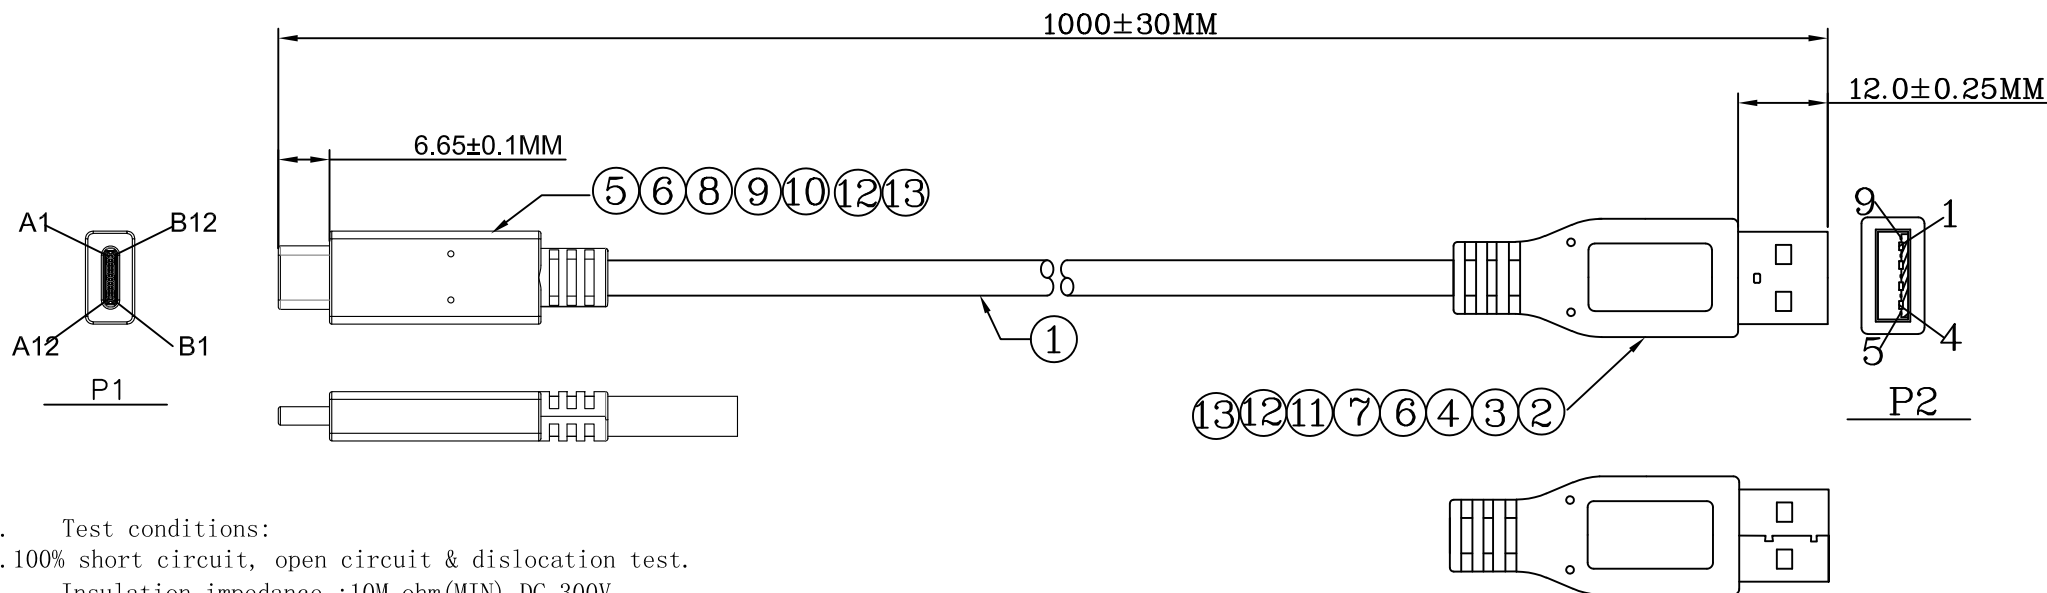


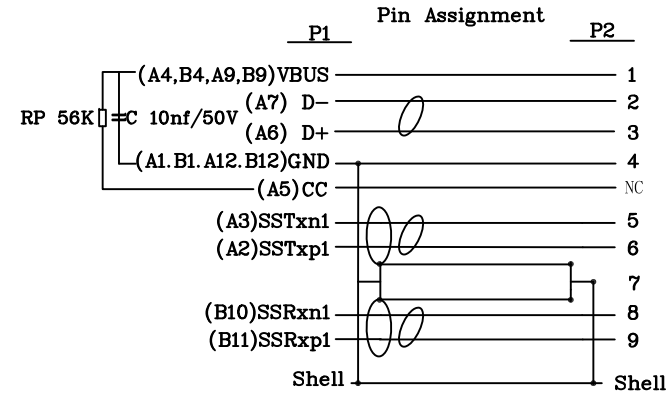

⑬	Double conductive copper foil	0.06	M	REV. ECN NO DESCRIPTION DATE NAME TOLERANCE INCHES M/M .X .015 .30 .XX .010 .10 .XXX .005 .05 DRAWN BY Shijie CHECK BY APPD BY CUSTOMER : CUSTOMER P/N: SCALE NONE UNIT MM DATE 2021.11.16 TITLE: USB 3.1 AM TO CM CABLE L=1.0M DRAWING NO: REV T01 1/2
⑫	Low pressure molding materia	0.5	g	
⑪	AM Wire clip 30+30+24AWG	1	PCS	
⑩	TYPE C Wire clip 30+30+24AWG	1	PCS	
⑨	USB TYPE C on Meta Can	1	PCS	
⑧	USB TYPE C Under the Meta Can	1	PCS	
⑦	Transparent PE material	3	g	
⑥	45P PVC black	12	g	
⑤	USB 3.1 C Type Connector+56K Resistance+10NF Capacitance	1	PCS	
④	USB3.0 AM after Shell Nickel plating	1	PCS	
③	USB3.0 AM before Shell Nickel plating	1	PCS	
②	USB3.0 AM~Blue rubber core Terminals Gold plated G/F	1	PCS	
①	USB3.1~[30AWG (7/0.1TC)+EAM]*2P+[30AWG (7/0.1TC)*1P+A]+24AWG (7/0.2TC)*2C+AEB(16/7/0.12TC 85%)OD:4.5MM~black	0.995	M	
NO	ITEM	DESCRIPTION	Q'TY	UNIT

CONN1: USB 3.1 C-Type

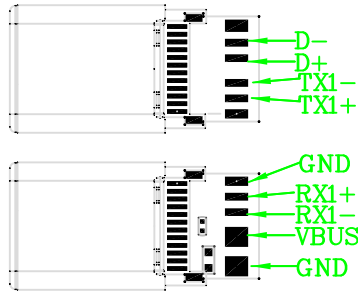

REV.	ECN NO	DESCRIPTION	DATE	
TOLERANCE INCHES M/M			ACT	
.X	.015	.30	TITLE: USB 3.1 AM TO CM CABLE L=1.0M	
.XX	.010	.10		
.XXX	.005	.05		
DRAWN BY	Shijie	CUSTOMER :		
CHECK BY		CUSTOMER P/N :	AC7416	
APPD BY		SCALE	NONE	DRAWING NO.: REV. T01
		UNIT	MM	
		DATE	2021.11.16	

NO	ITEM	DESCRIPTION	Q'TY	UNIT
----	------	-------------	------	------