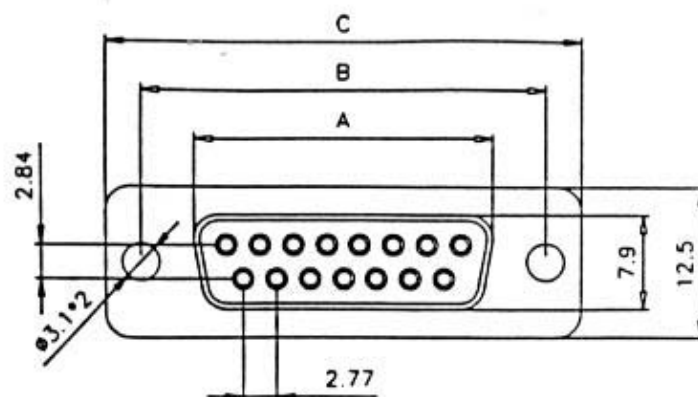


No. of contacts	A	B	C	D
09	16.30	25.00	30.8	19.2
15	24.60	33.30	39.2	27.7
25	38.30	47.10	53.1	41.1
37	54.80	63.50	69.4	57.3
50	52.20	61.00	67.0	55.1

Insulators: PBT glass filled, UL 94V-0
 Contact: Brass
 Shell: Steel
 Plating: Gold flash
 Rating current: 3A
 Contact resistance: <15 mOhm
 Insulation resistance: >3000 Mohm at 500V
 Dielectric strenght: 1000v at 1 minute
 Operatin temperature: -55°C to +105°C

Änderung

Datum

Name

Datum

Name

Benennung

D-Sub connector
 DIP-Solder type, straight,
 Female
A-DF ... PP

ASSMANN
 Electronic Components

Zeichnungsnummer

ASS 0199 CO


Blatt

1/2


Ersatz für ASS 0199 CO
 vom 24.02.95

Blatt

PCB Layout

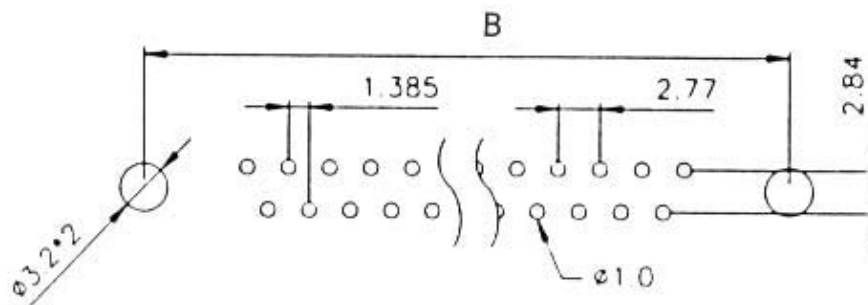

9, 15, 25, 37pol

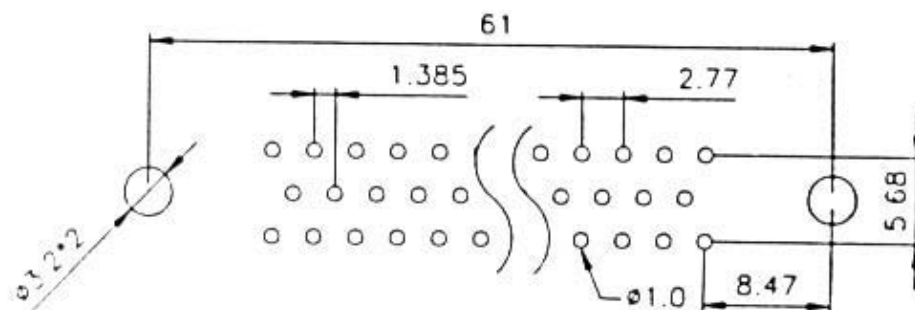

50pol

Änderung

Datum

Name

Datum

Name

Benennung

D-Sub connector
DIP-Solder type, straight,
Male

A-DS ... PP

Zeichnungsnummer

ASS 0200 CO

Blatt

2/2

Ersatz für ASS 0200 CO
vom 24.02.95

Blatt

ASSMANN
Electronic Components

1

2

3

4

5

6

7