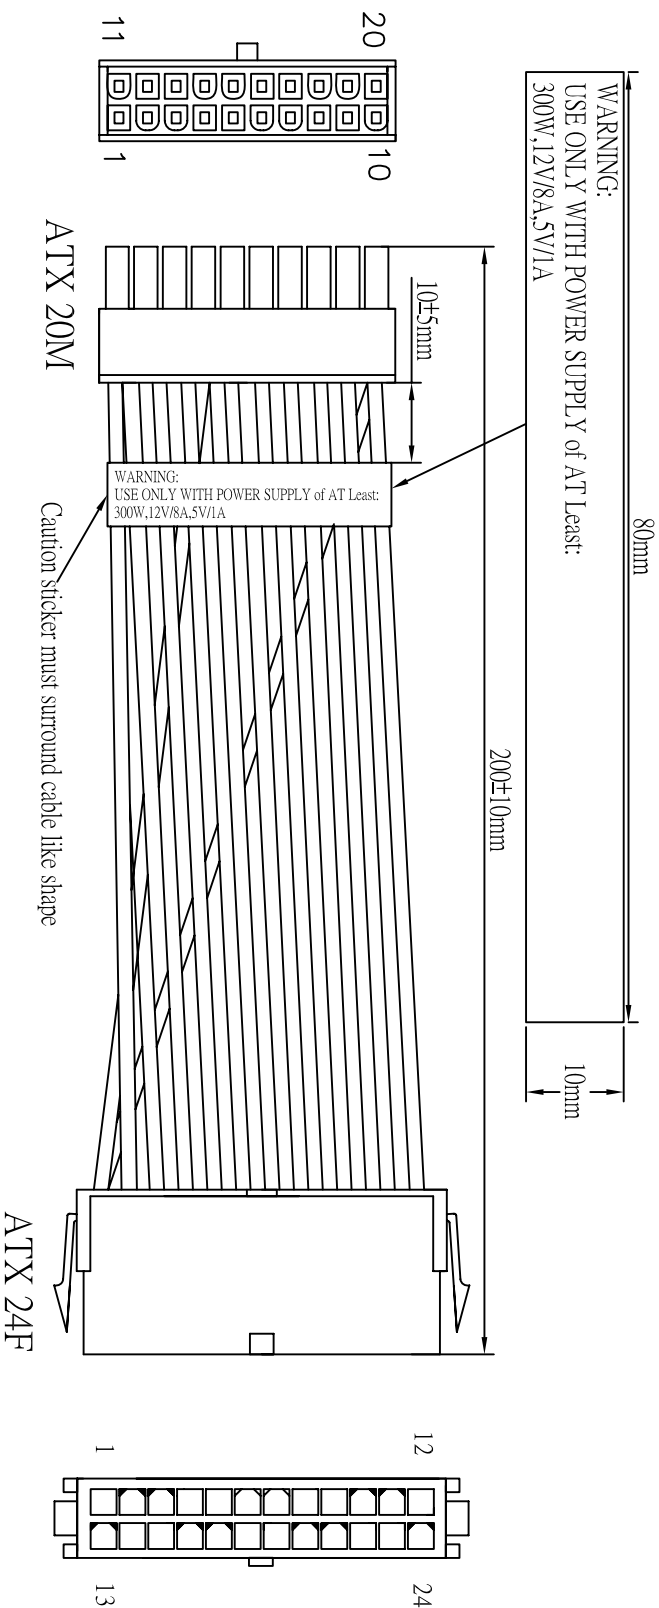



- NOTE:
1. CABLE:UL1007,20AWG*8PCS,18AWG*16PCS,PVC JACKET.
 2. LENGTH:200mm.
 3. CONNECTORS:ATX 20Pin HOUSING (MALE)*1PCS,ATX24Pin HOUSING (FEMALE) *1PCS.
 4. MOLD.ASSEMBLY.
 5. CONTACTS:

ATX 20M	1	2	3	4	5	6	7	8	9	10	10	11	11	12	13	14	15	16	17	17	18	19	20	20
ATX 24F	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
	ORG	ORG	BLK	RED	BLK	RED	BLK	GRY	PUR	VEL	VEL	ORG	ORG	BLU	BLK	GRN	BLK	BLK	BLK	BLK	WHT	RED	RED	RED
	18#	18#	18#	18#	18#	18#	18#	18#	20#	20#	20#	20#	20#	18#	18#	18#	20#	20#	20#	20#	18#	20#	20#	20#

- 6.OPEN/SHORT TEST:100% TEST.
7. OPEN/SHORT TEST: 100% TEST.
- INSULATION:5M.

Company	IBV	Goods Code		Draw	FC001	WJF	Date	2009.10.13	1PCS/PE BAG(0.06*100*200mm)+Sticker			
ITEM NO.	AK 3216	Drawing Evidence:		Check			Date		D			
Goods NO.				Check			Date		C	Adding Packaging info.	10.06.02WJF	
Original NO.	S-*****	Unit(mm)		Approval			Date		B	Revised contacts,adding caution sticker	10.05.06w.jf	
									VER. A	REVISE	Date	

RoHS Compliant

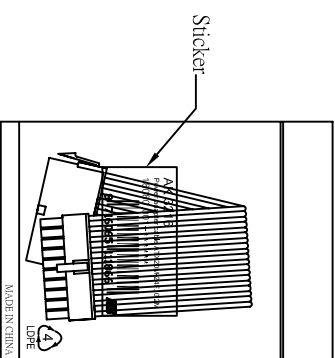

ATX