


CUSTOMER'S APPROVAL: _____ DATE: _____

FIRST ARTICLE SAMPLE REQUIRED: YES, NO.

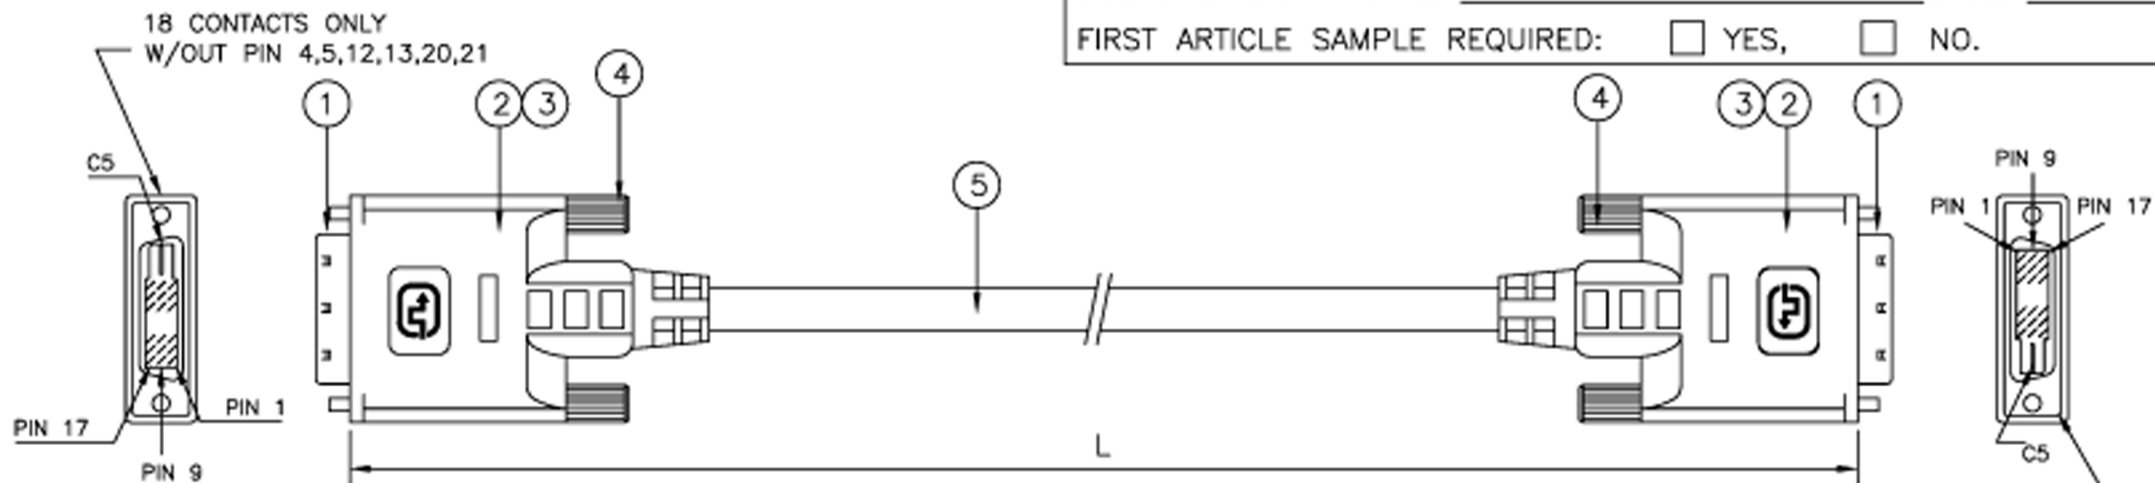

DVI MALE		DVI MALE	
TMDS DATA 2-	1	1	1
TMDS DATA 2+	2	2	2
TMDS DATA 2 SHIELD	3	3	3
DDC CLOCK	6	6	6
DDC DATA	7	7	7
TMDS DATA 1-	9	9	9
TMDS DATA 1+	10	10	10
TMDS DATA 1 SHIELD	11	11	11
POWER +5V	14	14	14
GROUND (+5V & HV SYNC.)	15	15	15
HOT PLUG DETECT	16	16	16
TMDS DATA 0-	17	17	17
TMDS DATA 0+	18	18	18
TMDS DATA 0 SHIELD	19	19	19
TMDS CLOCK SHIELD	22	22	22
TMDS CLOCK+	23	23	23
TMDS CLOCK-	24	24	24

SHELL BRAID SHELL

NOTE:

1. THIS ITEM CONTAINS PAT. NO:US 6,287,148 B1 RF-BLOK™ SHIELDING DESIGN
2. WIRE MARKING:

E193793 RJ AWM 20276 80°C 30V VW-1
DVI SINGLE LINK DIGITAL SUPER LOW ATTENUATION CABLE (SLAC™)

UNIT: mm

P/N	L±(mm)
AK3625	10000±200
AK3626	15000±250

ITEM	DESCRIPTION	QTY.	UNIT
1	DVI MALE CONNECTOR W/18 CONTACTS ONLY(18+1)	2	PCS
2	BLACK MOLDED PVC HOOD	2	PCS
3	PAT.US 6,287,148 B1 RF-BLOK™ SHIELDING METAL CAN	2	PCS
4	BLACK COLOR #4/40 THUMBSCREW	4	PCS
5	UL20276 (24AWGx1PAIR+DRAIN+AL+MYLAR)x4C 28AWGx5C+AL-FOIL+BRAID OVERALL; BLACK COLOR PVC JACKET	SEE	DWG

REVISED DETAILS			REVISED BY
REV.	DESCRIPTION	DATE	

Part number:	Revision:
RFQ number:	ORIG.
Drawn by: STANLEY	Drawing #: 94062102
Checked by:	Scale: None
	Date:

AK3625