


ELECTRICAL TEST:
 1. 100% OPEN SHORT MIS WIRE TEST
 2. CONTACT RESISTANCE:5 OHM MAX
 3. INSULATION RESISTANCE:5M OHM MIN
 4. HI-POT TEST:DC 300V/10ms
 5. PASS 4K TEST



CONSUMER ITEM	LENGTH (mm)	CODING	packing
AK3948	500±20		
AK3949	1000±30		
AK3953	1500±30		
AK3950	2000±30		
AK3951	3000±30		
AK3952	5000±50		

DVI-I M 24+5 Gold plated

DVI-I M 24+5 Gold plated

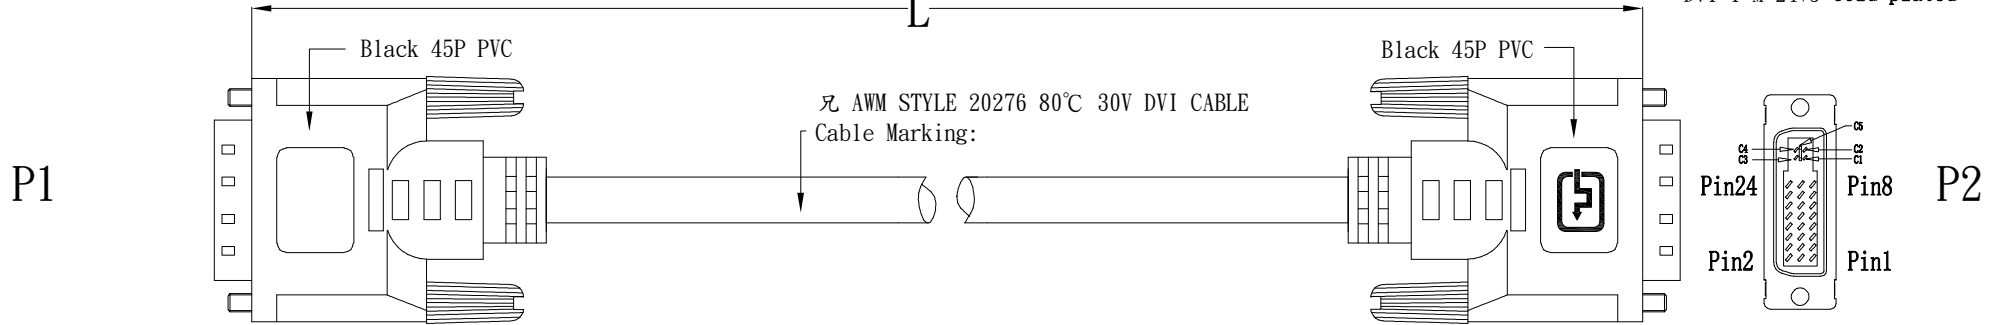

P1 P2

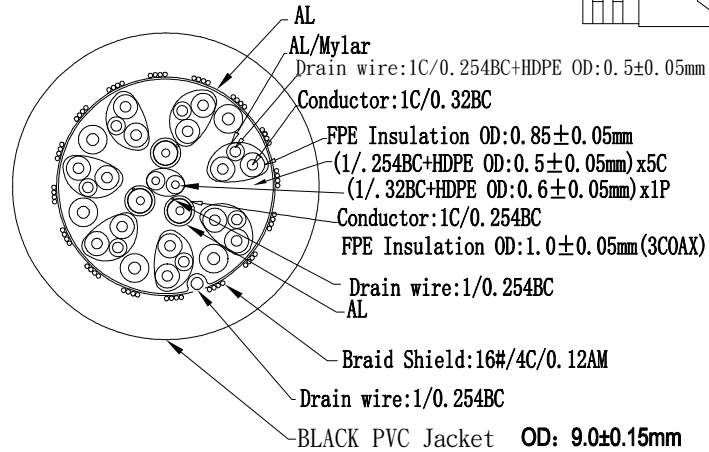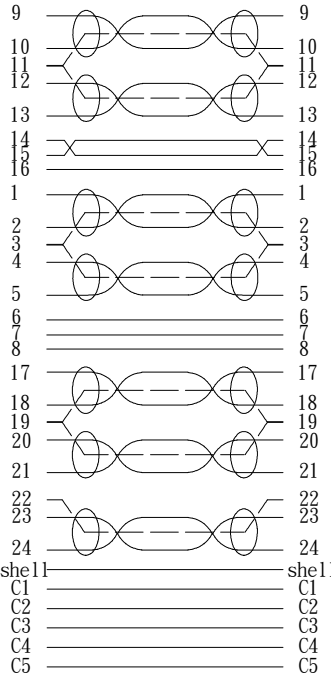

ACT				DESCRIPTION	FINISHED PRODUCT'S FIGURE	SCALE	FIT	UNITS: MM	1RD ANGLE
APPROVED	CHECKED	DRAWING	DESIGNED	DRAWING NO.	153-180	△			
		Z-T		FINISHING		△	2019/06/26		A1
				MATERIAL		SYM	DATE		REVISION