


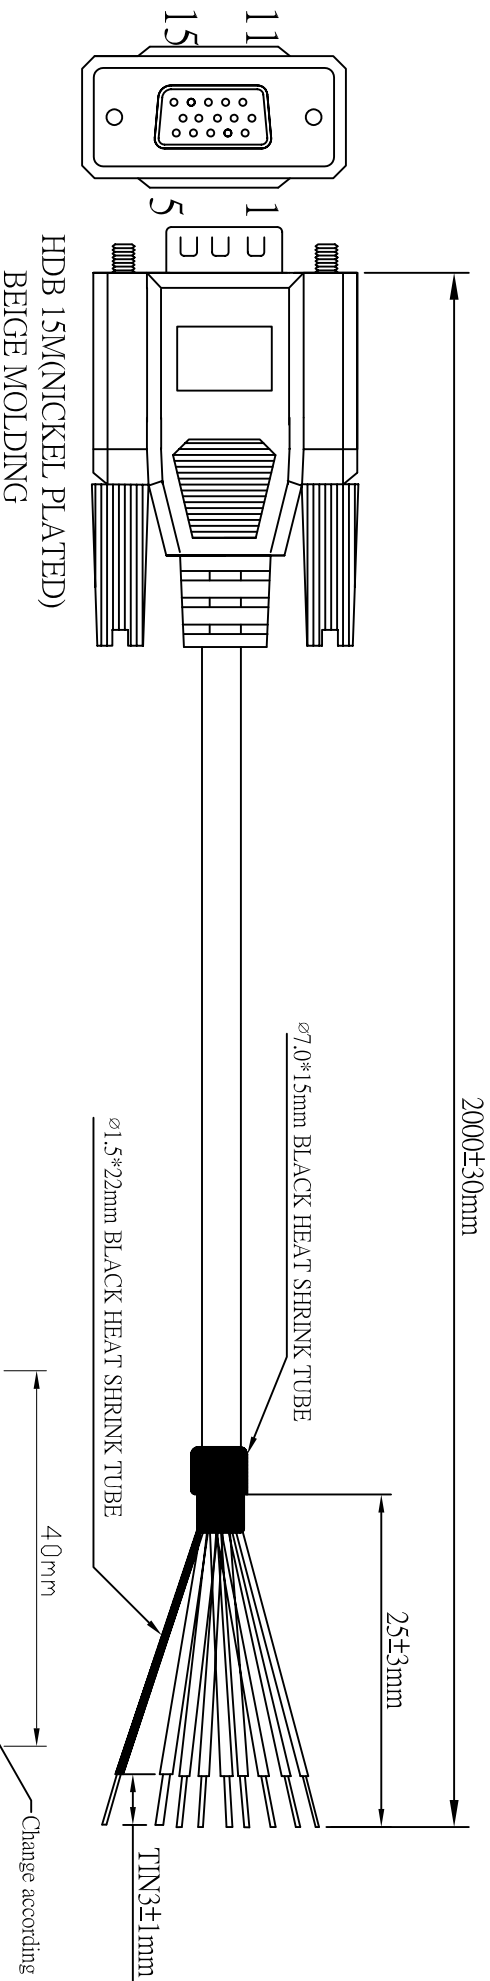



- NOTE:
1. CABLE:28AWG, NON-UL, AL-FOIL, 15C+1, OD=6.0mm, BEIGE COLOR, PVC JACKET.
 2. LENGTH: 2000mm
 3. CONNECTORS: H DB15M*1PCS(BLACK INSULATOR, NICKEL PLATED)
 4. MOLD: BEIGE MOLDING.
 5. CONTACTS:

HDB15M	1	2	3	4	5	6	7	8	9	10
OPEN	LIGHT /BROWN	RED	ORANGE	YELLOW/DARK GREEN	BLUE	PURPLE	DARK GREY	BLACK	WHITE	
HDB15M	11	12	13	14	15	64				
OPEN	VIOLET	LIGHT GREEN	LIGHT GREY	DARK BROWN	PINK	DRAIN				

6. OPEN/SHORT TEST: 100% TEST.
INSULATION: 1M.

RoHS Compliant

1PCS/PE BAG(0.06*190*300mm)+STICKER

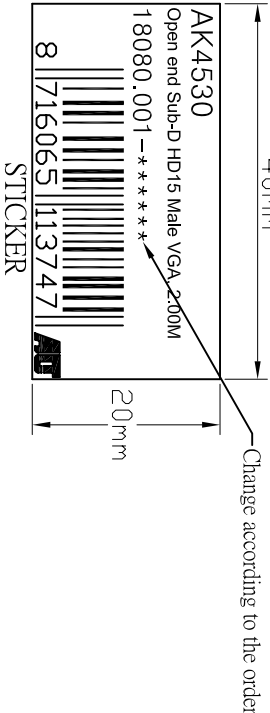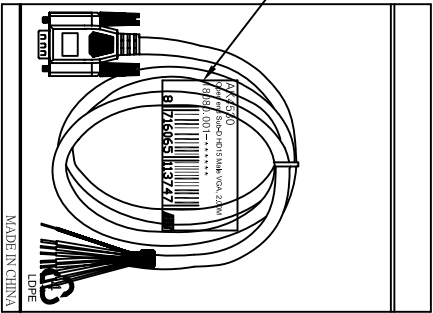

Company	I.B.V		Goods Code			Draw	FC001 WJF	Date	2009.10.13		
ITEM NO.	AK 4530		Drawing Evidence			Check		Date			
Goods NO.						Approval		Date			
Original NO.	S-*****		Unit(mm)					Date			
										VER. A	REVISE
										Date	