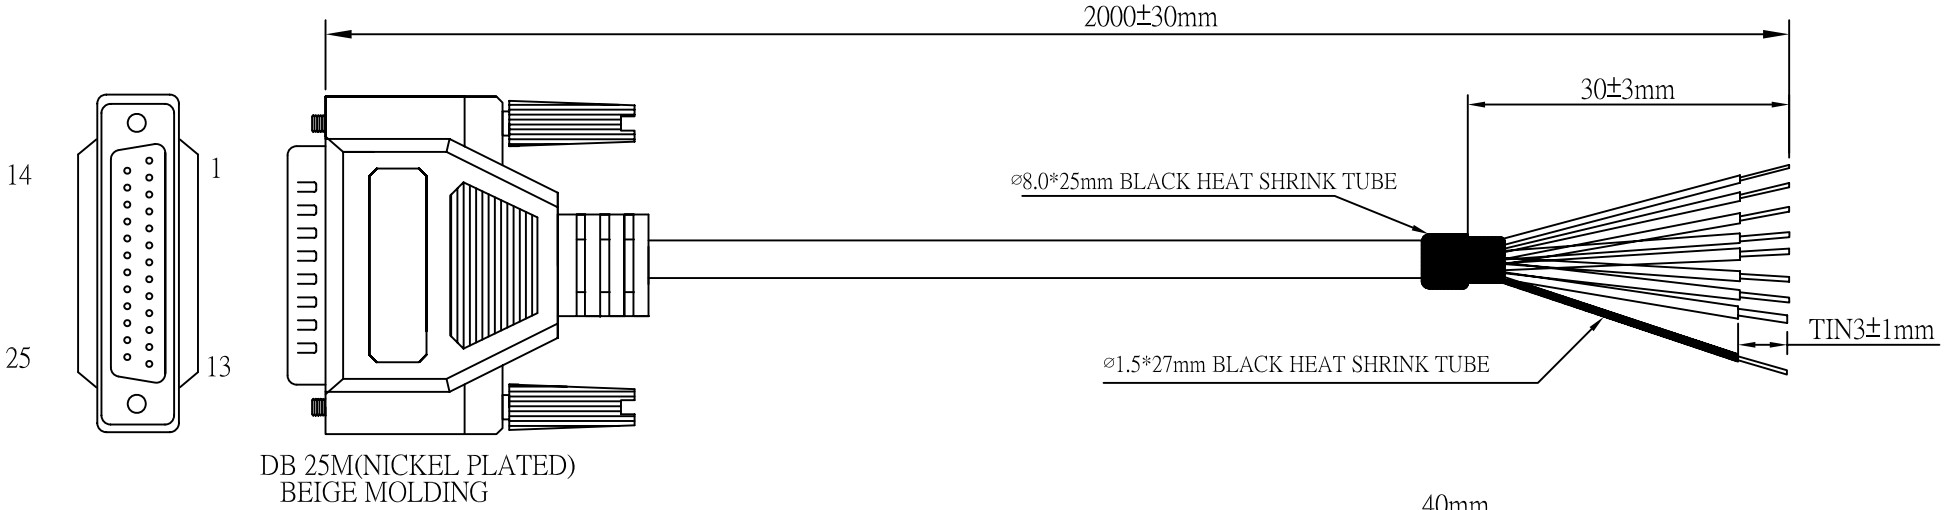

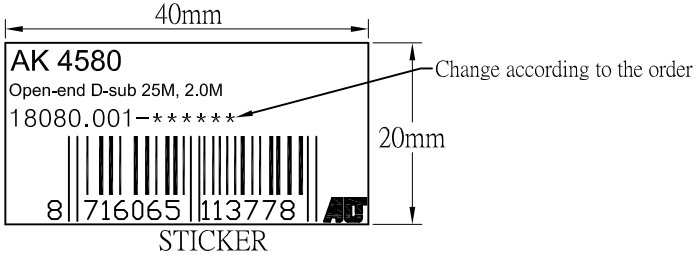

NOTE:

1. CABLE:28AWG,NON-UL,AL-FOIL,25C+1,OD=7.0mm,BEIGE COLOR,PVC JACKET.
2. LENGTH: 2000mm
3. CONNECTORS:DB25M*1PCS(BLACK INSULATOR)
4. MOLD: BEIGE MOLDING.
5. CONTACTS:

DB25M	1	2	3	4	5	6	7	8	9	10
OPEN	BRN	RED	ORG	YEL	GRN	BLU	PUR	GREY	WHT	BLK

DB25M	11	1 2	1 3	14	1 5	16	17	18	19
OPEN	PINK	PINK /GRN	RED /BLACK	BROWN /WHITE	RED /WHITE	ORANGE /WHITE	YELLOW /BLACK	GREEN /WHITE	YELLOW /WHITE

DB25M	20	21	22	23	24	25	64
OPEN	PURPLE /WHITE	GREY /BLACK	BLACK /WHITE	PINK /BLACK	ORANGE /BLACK	GREEN /BLACK	DRAIN

6. OPEN/SHORT TEST: 100% TEST.
   INSULATION: 5M.

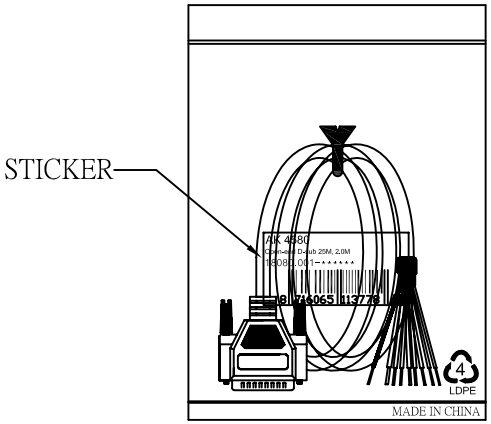

RoHS COMPLIANT

1PCS/PE BAG(0.06*100*200+STICKER

Company	I.B.V	Goods Code		Draw	FC001 LTX	Date	2009.10.14		D		
ITEM NO.	AK 4580	Drawing Evidence:		Check		Date			C		
Goods NO.				Approval		Date			B	Adding packaging info	10.23th.04WJF
Original NO.	S-*******	Unit(mm)							VER. A	REVISE	Date