


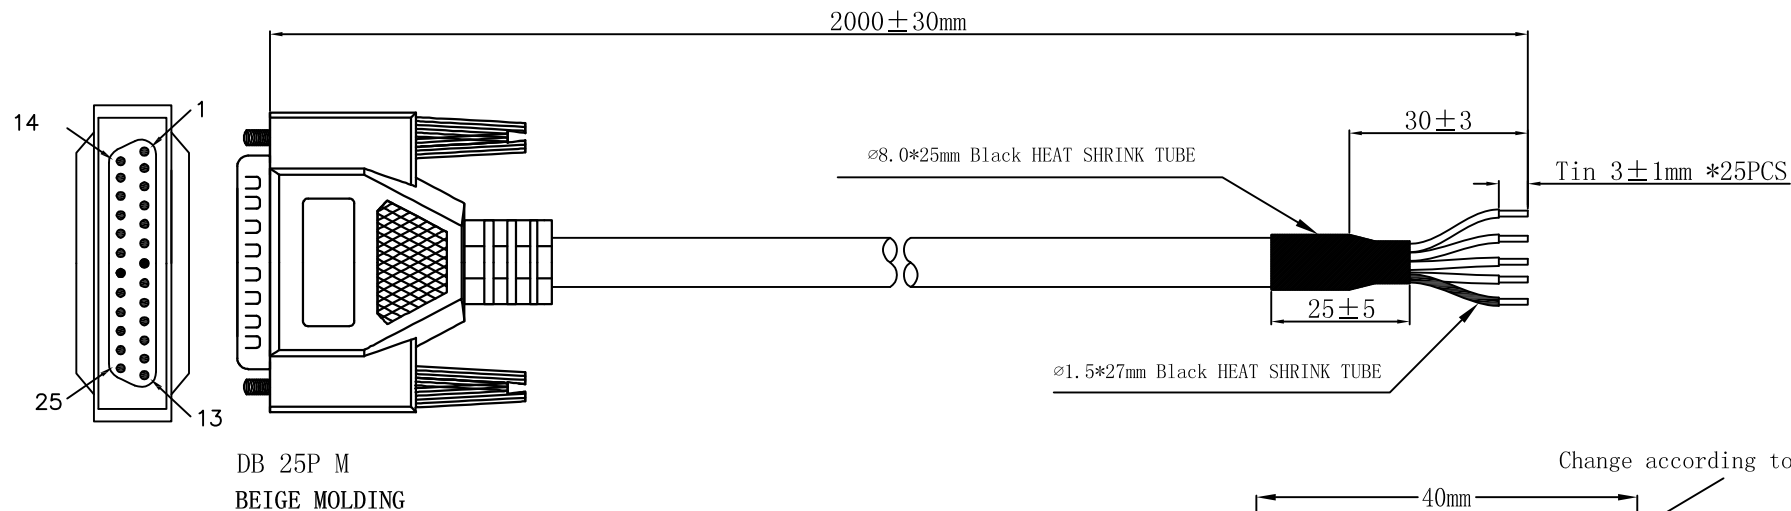

NOTE:

1. Cable:NON-UL 28AWG*25C+D+AL OD:7.0mm BEIGE COLOR, PVC JACKET (INSULATION COLOR: Brown/Red/Orange/Yellow/Green/Blue/Purple/Gray/White/Black/Light Red/Light Green/Purple-White/Light Purple/Gray-White/Light Yellow/Dark Blue/Orange-White/Light Gray/Yellow-White/Blue-White/Black-White/Green-White/Red-White/Light Blue)
2. CONNECTOR:DB25P MALE INSULATION:BLUE, SHELL NICKEL-PLATED.
3. SCREW:#4-40UNC(ø2.3*44) NICKEL-PLATED*2PCS (BEIGE).
4. OUTER MOLDING :PCV 45 BEIGE
5. BLACK TUBE:ø8.0*25mm Heat Shrink Tube
6. BLACK TUBE:ø1.5*27mm Heat Shrink Tube



CONTACTS

DB25P M	OPEN(Tin)	DB25P M	OPEN(Tin)
1	1 Brown	14	14 Light Purple
2	2 Red	15	15 Gray-White
3	3 Orange	16	16 Light Yellow
4	4 Yellow	17	17 Dark Blue
5	5 Green	18	18 Orange-White
6	6 Blue	19	19 Light Gray
7	7 Purple	20	20 Yellow-White
8	8 Gray	21	21 Blue-White
9	9 White	22	22 Black-White
10	10 Black	23	23 Green-White
11	11 Light Red	24	24 Red-White
12	12 Light Green	25	25 Light Blue
13	13 Purple-White	Shell	Shell Drain

Electrical Test:

1. 100% Test, Open, Short, Mis-wire
2. contact Resistance:5 ohm Max
3. Insulation Resistance:5M ohm Min.
4. Hie-pot:300V DC/10ms

RoHS Compliant

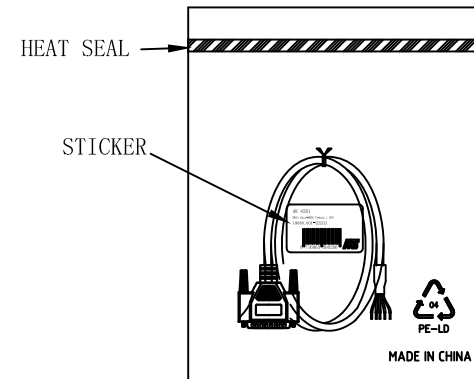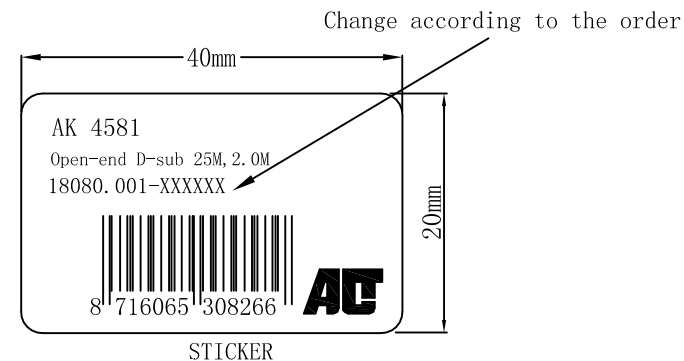

1PCS/PE BAG(0.06*200*300mm)+STICKER

Company	IBV	Goods Code		Draw	F46	Date	13-10-14
ITEM NO.	AK 4581	Drawing Evidence:		Check		Date	
Goods NO.				Approval		Date	
Original NO.		Unit(mm)					



D		
C		
B		
VER. A	REVISE	Date