
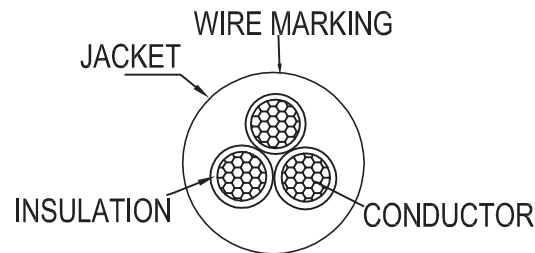

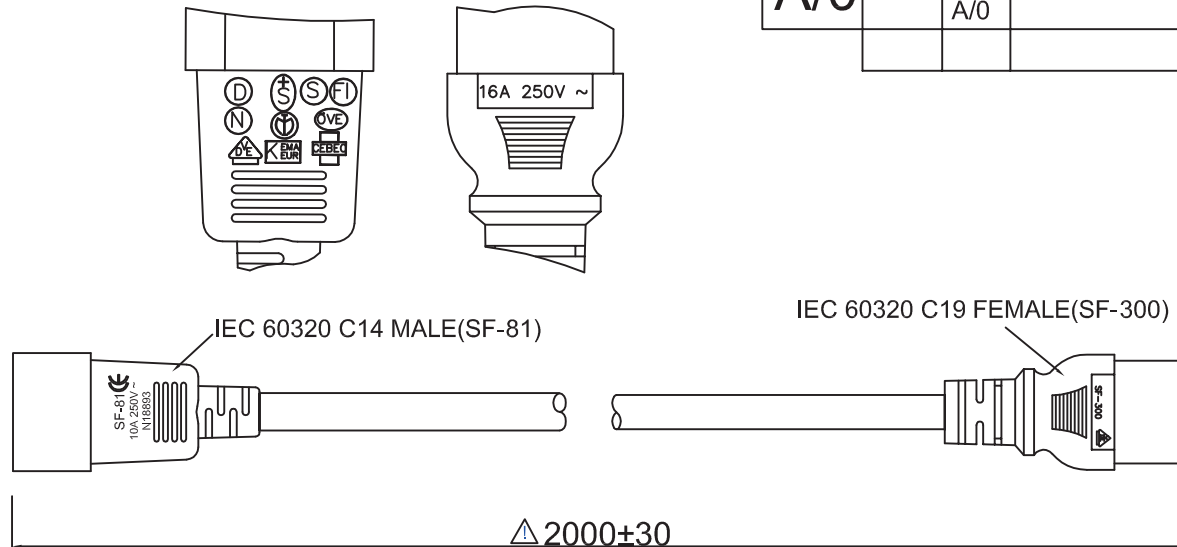


ROHS COMPLIANT

PLUG MARKING:

A/0

DATE	REV	DESCRIPTION	BY	CHECK
	A/0			



ELECTRIC TESTING:

1. 100% OPEN & SHORT TESTING .
2. VOLTAGE RATING:AC ≥2000V/S ≥0.5mA
- 3.PLUG IEC 60320 C14 MALE(SF-81) RATED POWER:250V 10A
- 4.PLUG IEC 60320 C19 FEMALE(SF-300) RATED POWER:250V 16A
- 5.WIRE: H05VV-F 3*1.0 RATED VOLTAGE:300/500V
- 6.COLOR:BLACK

WIRE MARKING: (HOLLOW)		+ + + + + KEMA-KEUR CEBC 972 NF-USE 1345 IEMMEQU H05VV-F 3G1.0MM ² V-75 300/500V ORDINARY DUTY NSW17436					
Conductor		Insulation			Jacket		Overall diameter
mm ²	Resistance maximum (≤)	Min.Thick	Diameter	Length of Lay	Min.Thick	AVG.Thick	
1.0 (32/0.190)	at20°C,19.5ohms/km	0.44mm	2.5±0.1mm	130 ↓ mm	0.58mm	0.8mm	7.0±0.1mm
(NOTE: IF THE CONDUCTORS O.D IS GO BEYOND THE SCOPE, THE RESISTANCE OF CONDUCTOR IS STANDARD THEN)							

PAGE

1/1



AC

Unless specified on the drawing, tolerances are per the follows:

.X ± 1
.XX ± 0.5
.XX ± 0.1

3RD



DESCRIPTION	H05VV-F3G1.0 SF-81+SF-300				
CUSTOMER NAME			SAMPLE NO.		
CUSTOMER PART NO.	AK5025	DRAW	DHY	DATE	2011/10/18
SCALE		CHECK	wuxiao	DATE	2011/10/18
UNIT	MM	APPROVAL		DATE	
PATH NAME	//D/DHY				