

AK5047

PC1173

CABLE REQUIREMENTS:

Colour: BLACK
Type: 3 Core 1.50mm² H05VV-F (European Approved)
Conductor Colour Codes:
 Earth (Green & Yellow) 
 Neutral (Blue) 
 Live (Brown) 

Complete Powerlead Rated: 16A/250V

PLUG / END A REQUIREMENTS:


Type: Free End
Colour:
Rating:
Reference: See Further comments / Terminations below.

CONNECTOR / END B REQUIREMENTS:

Type: SW920
Colour: BLACK
Rating: 16A
Reference: C19 IEC Lock Connector (European Approved)

Free End Overall Strip Lengths (Includes Terminations)

Live = 40mm (+/- 2mm)
 Earth = 40mm (+/- 2mm)
 Neutral = 40mm (+/- 2mm)

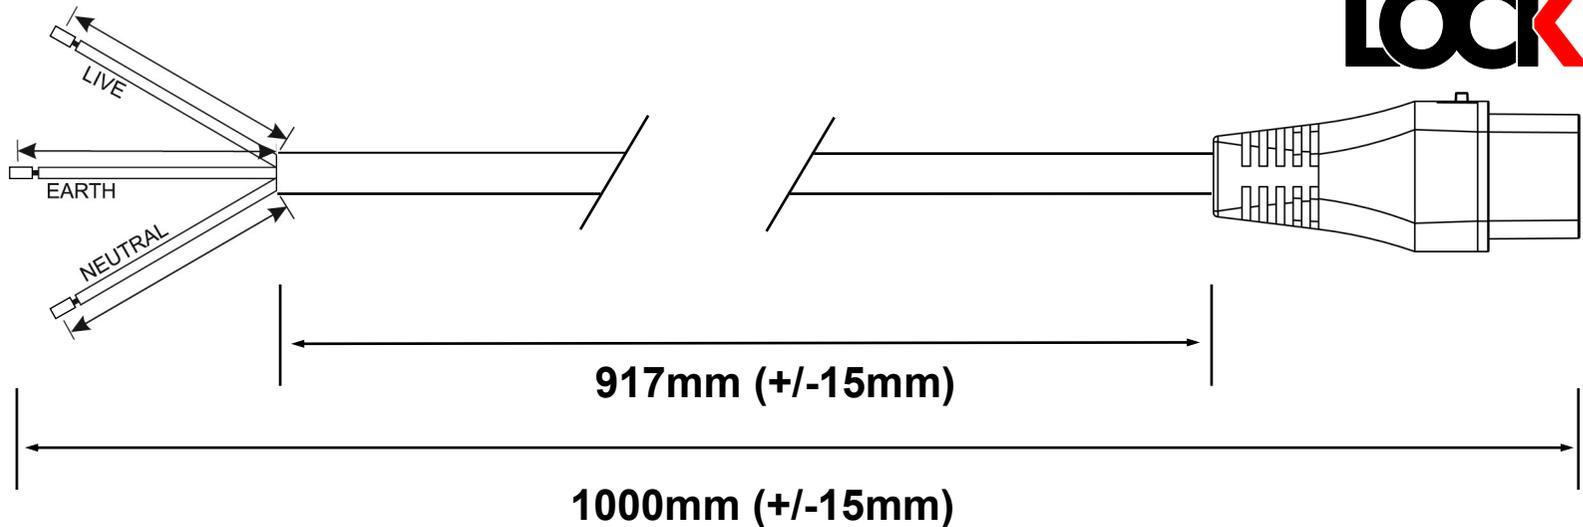

EXTRA REQUIREMENTS:

PACKAGING OUTER100
 PIN PROTECTING COVERNO
 WIRING INSTRUCTIONSNO
 PRE-SHIPMENT INSPECTION REQUIRED....NO

COMMENTS:
 NO knock out cover over red slide bar

CHANGE MANAGEMENT:

HANKING

Loose

TERMINATIONS / FURTHER COMMENTS:

LIVE / BROWN

Type: Slug Left On
Size: 6mm

NEUTRAL / BLUE

Type: Slug Left On
Size: 6mm

EARTH / GREEN & YELLOW

Type: Slug Left On
Size: 6mm