

# AK5048

PC1174

**CABLE REQUIREMENTS:**

**Colour:** BLACK  
**Type:** 3 Core 1.50mm<sup>2</sup> H05VV-F (European Approved)  
**Conductor Colour Codes:**  
 Earth (Green & Yellow)   
 Neutral (Blue)   
 Live (Brown) 



**Complete Powerlead Rated:** 16A/250V

**PLUG / END A REQUIREMENTS:**

**Type:** F/E  
**Colour:** N/A  
**Rating:** N/A  
**Reference:** See Termination Details Below

**CONNECTOR / END B REQUIREMENTS:**

**Type:** SW920  
**Colour:** BLACK  
**Rating:** 16A  
**Reference:** C19 IEC Lock Connector (European Approved)

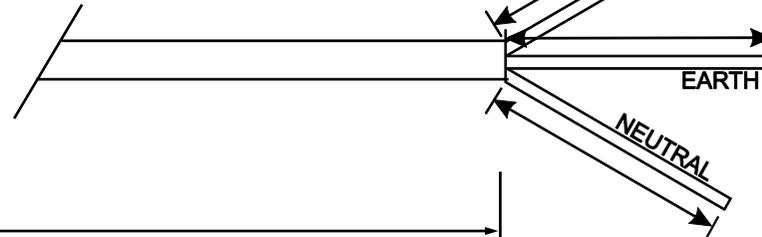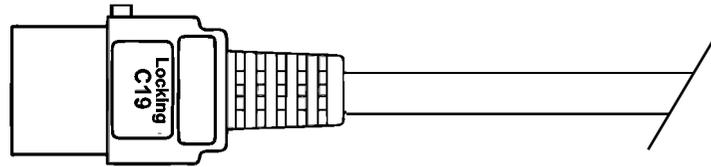

**Free End Strip Lengths (Includes Terminations)**  
 Live = 40mm (+- 2mm)  
 Earth = 40mm (+- 2mm)  
 Neutral = 40mm (+- 2mm)

**1877mm (+/-20mm)**

**2000mm (+/-20mm)**

**EXTRA REQUIREMENTS:**

PACKAGING OUTER .....TBC  
 PIN PROTECTING COVER .....NO  
 WIRING INSTRUCTIONS .....NO  
 PRE-SHIPMENT INSPECTION REQUIRED....NO

**COMMENTS:**

**CHANGE MANAGEMENT:**

**HANKING**

**Loose**

**TERMINATIONS / FURTHER COMMENTS:**

**LIVE / BROWN**

**Type:** Slug left on  
**Size:** 6mm (+-1mm)

**NEUTRAL / BLUE**

**Type:** Slug left on  
**Size:** 6mm (+-1mm)

**EARTH / GREEN & YELL**

**Type:** Slug left on  
**Size:** 6mm (+-1mm)