

AK5082

PC979

CABLE REQUIREMENTS:

Colour: BLACK
Type: 3 Core 1.00mm² H05VV-F (European Approved)
Conductor Colour Codes:
 Earth (Green & Yellow) 
 Neutral (Blue) 
 Live (Brown) 




Complete Powerlead Rated: 10A/250V

PLUG / END A REQUIREMENTS:

Type: SW905
Colour: BLACK
Rating: 10A
Reference:
 C13 IEC LOCK NON-REWIRABLE CONNECTOR (UK Approved)

CONNECTOR / END B REQUIREMENTS:

Type: Free End
Colour:
Rating:
Reference: See Further Terminations Below

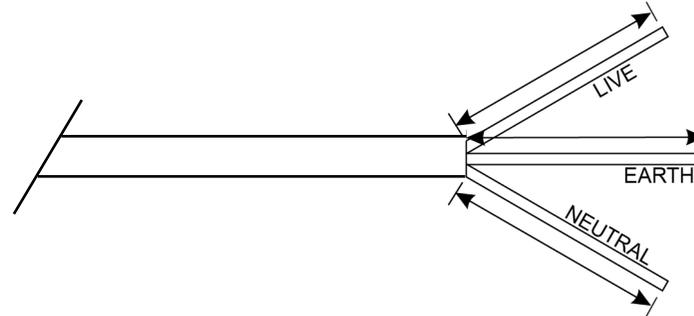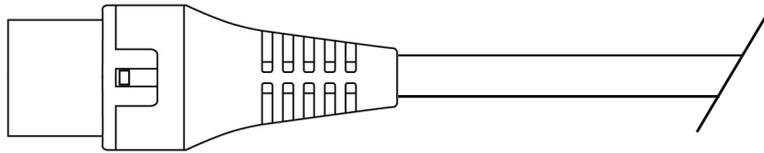

Free End Overall Strip Lengths (Includes Terminations)

Live = 50mm (+/- 2mm)
 Earth = 50mm (+/- 2mm)
 Neutral = 50mm (+/- 2mm)



EXTRA REQUIREMENTS:

PACKAGING OUTER100
 PIN PROTECTING COVERNO
 WIRING INSTRUCTIONSNO
 PRE-SHIPMENT INSPECTION REQUIRED....NO

COMMENTS:

CHANGE MANAGEMENT:

HANKING

LOOSE

TERMINATIONS / FURTHER COMMENTS:

LIVE / BROWN

Type: Stripped 6mm

EARTH / GREEN & YELLOW

Type: Stripped 6mm

NEUTRAL / BLUE

Type: Stripped 6mm