MOLDING:	DATE	REV.	REVISION	DRAFTING	CHECKED
SF-04 SF-82	2021/05/21	A/0	Initial	Bob.Chen	

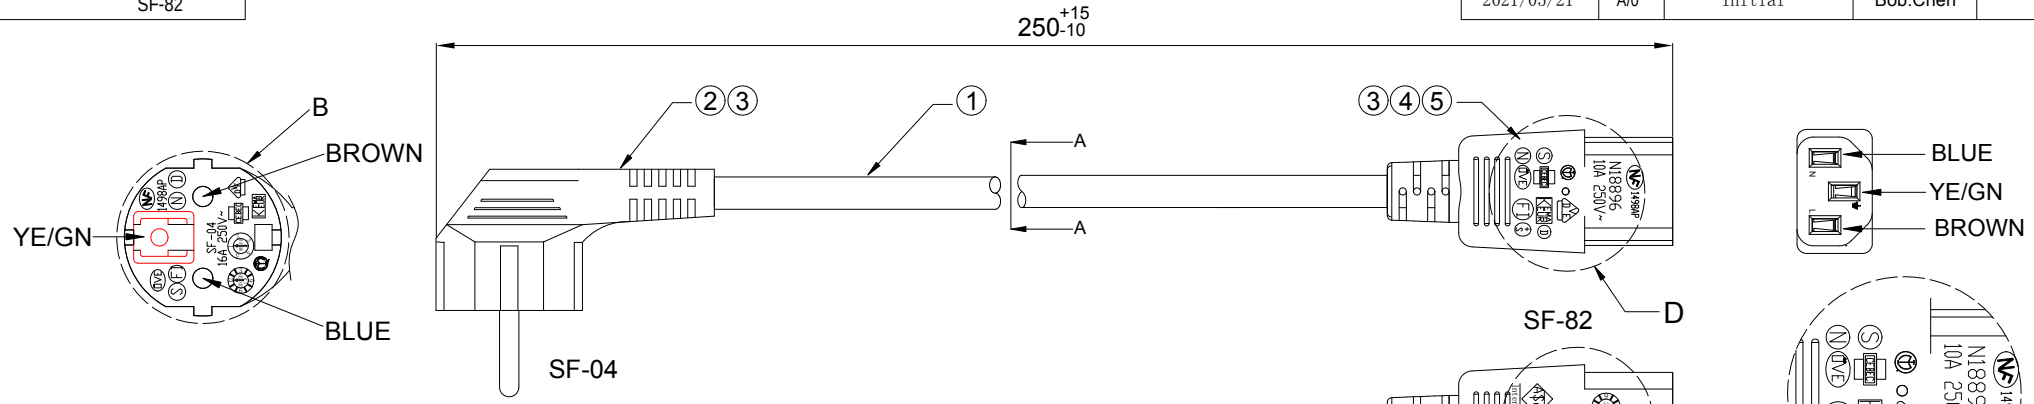



WIRE MARKING(NO.129):
+ S + S + S KEMA-KEUR (OVE) (S) (N) (D) (FI) △ CEBEC 972 ◁VDE▷ NF-USE 1345
IEMMEQU H05VV-F 3G0.75MM² V-75 300/500V ORDINARY DUTY NSW17436

CUST'R P/N	Color	RAL NO.(similar to)	Length
AK5253	BLACK	RAL9011	250^{+15}_{-10}

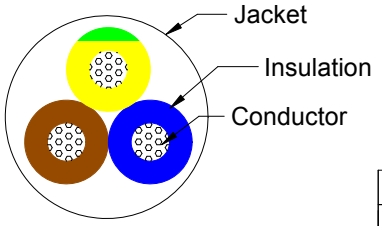

A-A



PINOUT		
SF-04	WIRE	SF-82
E	YE/GN	E
L	BROWN	L
N	BLUE	N

Polarity and Conduction and Penetrationt Test	
Dielectric Voltage Withstand Test : 2000V / 1 Sec	
Electrical Performance (20°C)	
Item	Parameter
Conductor Resistance	≤ 26Ω/1000m
Voltage Rating	AC 300V/500V

No.	TITLE	DESCRIPTION	Q'TY
⑤	Housing	IEC C13 three Pin(SF-82)inner frame , Black	1PC
④	Terminal	IEC C13 Female terminal,matching 20-16AWG wire	3PCS
③	Molding	50P PVC	A/R
②	Terminal	European standard,black french connector SF-04.	1PC
①	CABLE	H05VV-F 3GX0.75mm² PVC	A/R

Cable Spec NO.	--	Part Number	--	Note	■ RoHS2.0	■ Reach	□ GP	□ HF	□ Other

Unless specified on the drawing, tolerances are per the follows:
X. ±0.20 X° ±3
.X ±0.10 .X°±0.3
.XX ±0.05

DRAW. NO	AC-S210131	TITLE	H05VV F0.75mm²*3C SF-04 TO SF- 82 CABLE ASS'Y		
CUSTOMER	ACT				
CUST'R P/N	--	DRAW	Bob.Chen	DATE	2021.06.04
SCALE	NONE	CHECK	開發 2021.06.07	DATE	
UNIT	mm	APPROVED	羅吉武	SHEET	1 of 1