


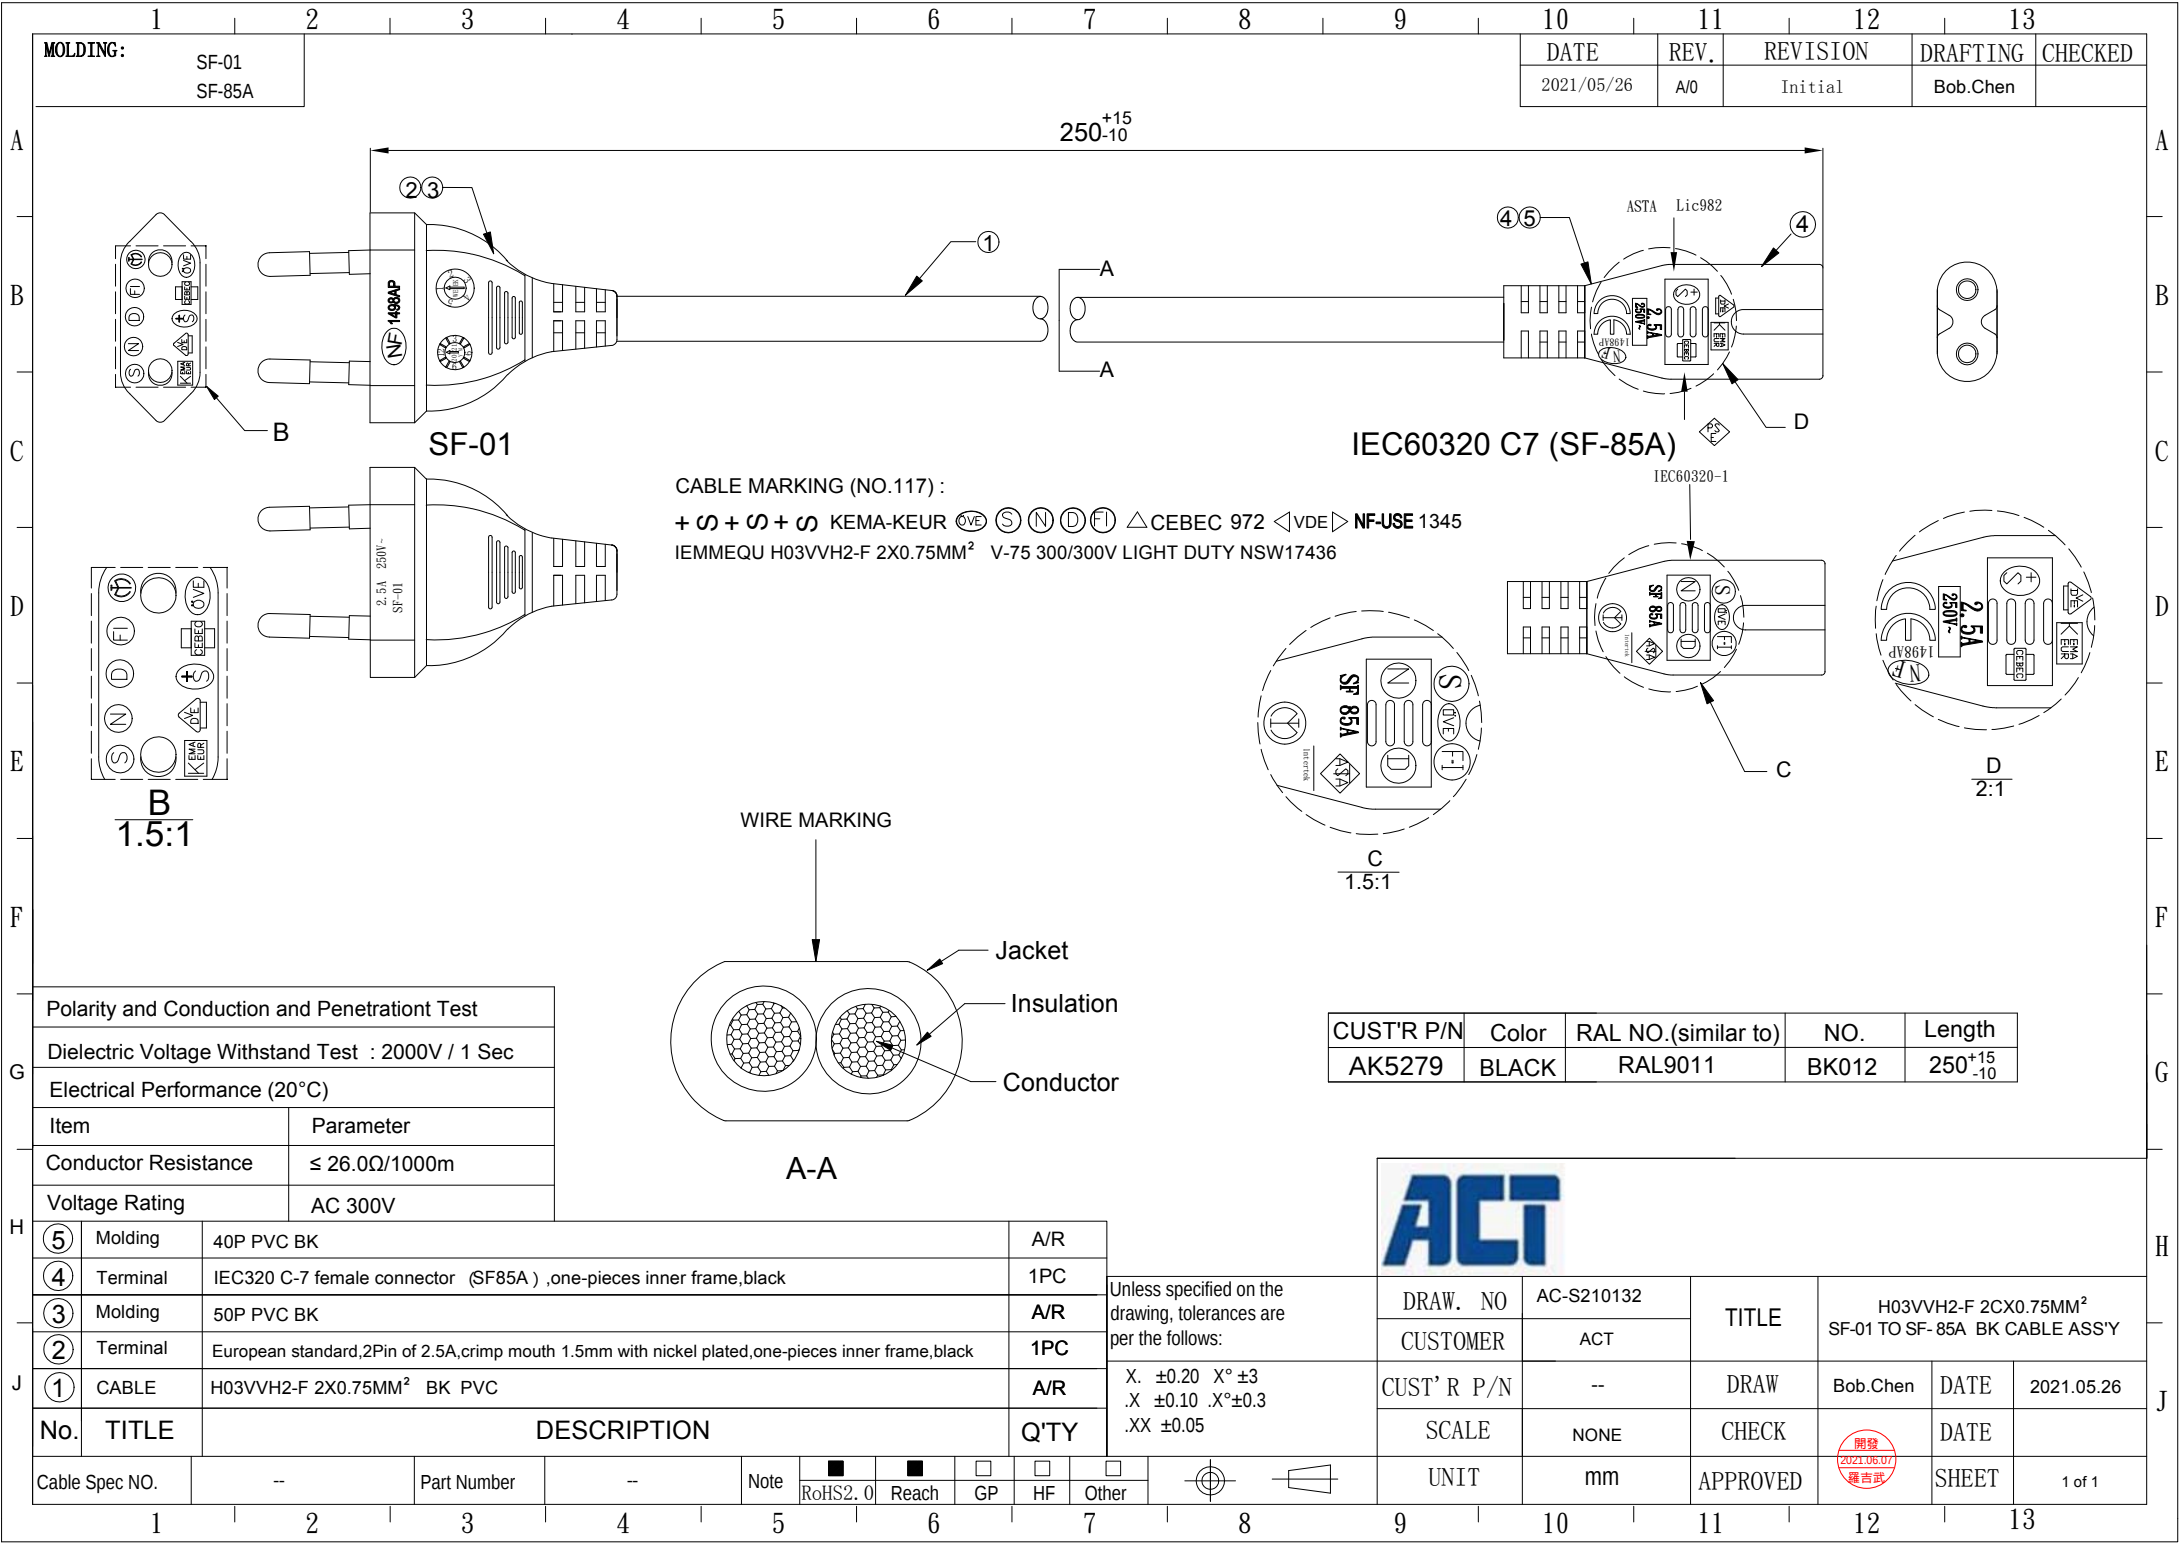

MOLDING:

SF-01
SF-85A

DATE

2021/05/26

REV.

A/0

REVISION

Initial

DRAFTING

Bob.Chen

CHECKED

CABLE MARKING (NO.117) :

+ 0 0 0 0 KEMA-KEUR 0VE S N D F △CEBEC 972 <VDE> NF-USE 1345
IEMMEQU H03VVH2-F 2X0.75MM² V-75 300/300V LIGHT DUTY NSW17436

IEC60320 C7 (SF-85A)

IEC60320-1

WIRE MARKING

A-A

Jacket

Insulation

Conductor

CUST'R P/N	Color	RAL NO.(similar to)	NO.	Length
AK5279	BLACK	RAL9011	BK012	250 ⁺¹⁵ ₋₁₀

ACT

Unless specified on the drawing, tolerances are per the follows:

X. ±0.20 X° ±3
.X ±0.10 .X° ±0.3
.XX ±0.05

DRAW. NO

AC-S210132

CUSTOMER

ACT

TITLE

H03VVH2-F 2CX0.75MM²
SF-01 TO SF- 85A BK CABLE ASS'Y

CUST' R P/N

--

DRAW

Bob.Chen

DATE

2021.05.26

SCALE

NONE

CHECK

DATE

DATE

1 of 1

UNIT

mm

APPROVED

開發
2021.05.07
羅吉武

SHEET

1 of 1

Polarity and Conduction and Penetration Test

Dielectric Voltage Withstand Test : 2000V / 1 Sec

Electrical Performance (20°C)

Item	Parameter
Conductor Resistance	≤ 26.0Ω/1000m
Voltage Rating	AC 300V

⑤	Molding	40P PVC BK	A/R
④	Terminal	IEC320 C-7 female connector (SF85A) ,one-pieces inner frame,black	1PC
③	Molding	50P PVC BK	A/R
②	Terminal	European standard,2Pin of 2.5A,crimp mouth 1.5mm with nickel plated,one-pieces inner frame,black	1PC
①	CABLE	H03VVH2-F 2X0.75MM ² BK PVC	A/R
No.	TITLE	DESCRIPTION	Q'TY

Cable Spec NO.	--	Part Number	--	Note	RoHS2.0	Reach	GP	HF	Other
----------------	----	-------------	----	------	---------	-------	----	----	-------