
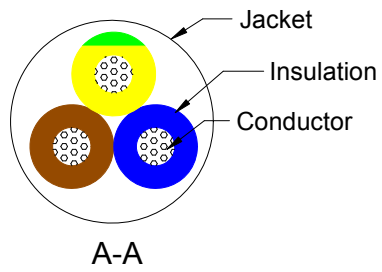


WIRE MARKING(No.129):
 + S + S + S KEMA-KEUR CEBC 972 $\langle VDE \rangle$ NF-USE 1345
 IEMMEQU H05VV-F 3Gx0.75MM² V-75 300/500V ORDINARY DUTY NSW17436 YFC BON-EAGLE

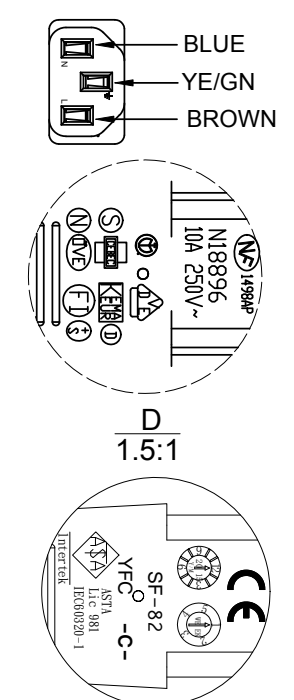

Item	Color	RAL NO. (similar to)	Length
AK5401	WHITE	RAL9003	500 ⁺¹⁵ ₋₁₀
AK5402	WHITE	RAL9003	1000 ⁺¹⁵ ₋₁₀
AK5235	WHITE	RAL9003	1500±20
AK5236	WHITE	RAL9003	2000±20
AK5145	BLACK	RAL9011	500 ⁺¹⁵ ₋₁₀
AK5146	BLACK	RAL9011	1000 ⁺¹⁵ ₋₁₀
AK5012	BLACK	RAL9011	1500±20
AK5015	BLACK	RAL9011	2000±20

Polarity and Conduction and Penetration Test	
Dielectric Voltage Withstand Test : 2000V / 1 Sec	
Electrical Performance (20°C)	
Item	Parameter
Conductor Resistance	≤ 26.0Ω/1000m
Voltage Rating	AC 300V/500V

PINOUT		
SF-04	WIRE	SF-82
E	YE/GN	E
L	BROWN	L
N	BLUE	N

⑤	Housing	IEC C13 three Pin(SF-82)inner frame , Black	1PC
④	Terminal	IEC C13 Female terminal,matching 20-16AWG wire	3PCS
③	Molding	50P PVC	A/R
②	Terminal	European standard,black french connector SF-04.	1PC
①	CABLE	H05VV-F 3Gx0.75mm ² PVC	A/R
No.	TITLE	DESCRIPTION	Q'TY

Unless specified on the drawing, tolerances are per the follows:
 X. ±0.20 X° ±3
 .X ±0.10 .X° ±0.3
 .XX ±0.05

DRAW. NO	YFAC-S210104	TITLE	H05VV F0.75mm ² *3C SF-04 TO SF- 82 WH123 CABLE ASSY		
CUSTOMER	ACT	DRAW	Bob.Chen	DATE	2021.05.21
CUST' R P/N	--	CHECK		DATE	
SCALE	NONE	APPROVED		SHEET	1 of 1