
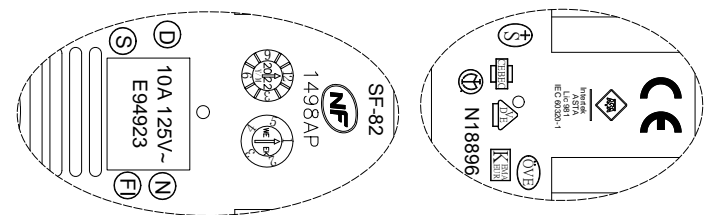
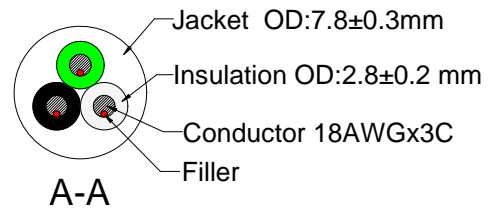

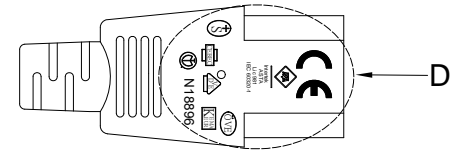
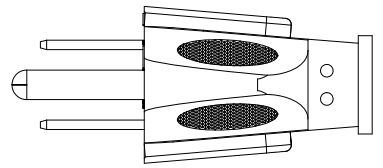
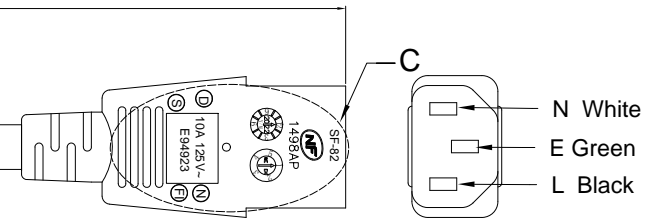
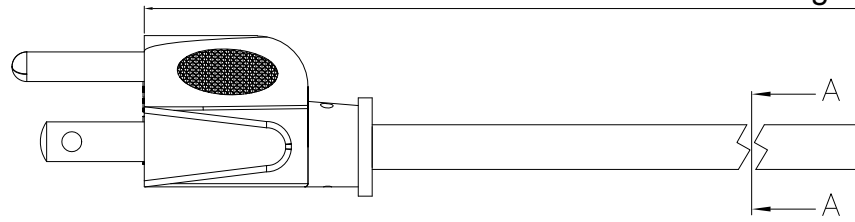


1	2	3	4	5	6	7	8	9	10
CUSTOMER NAME						DATE	REV	DESCRIPTION	BY
CUSTOMER Part No.						2022.10.22	A/0	NEW	LQF



Customer Item No.	Cable Color	Molding Color	RAL NO. (similar to)	Length (mm)
AK5443	Black	Black	RAL9011	1000±15
AK5444	Black	Black	RAL9011	1800±30
AK5062	Black	Black	RAL9011	2500±30

PINOUT			
SF-31		SF-82	WIRE
E		E	Green
L		L	Black
N		N	White

REMARKS:

- 1.POLARIZATION AND CONTINUITY TEST
- 2.DVW TEST:1500VAC,1S
- 3.PLUG(SF-31) MOLDING PVC RATED POWER:125V 10A
- 4.CONNECTOR (SF-82) MOLDING PVC RATED POWER:125V 10A
- 5.WIRE: SJT 18AWG 3C 60°C RATED VOLTAGE:300V
- 6.CE LOGO SIZE: 5.0mm

WIRE MARKING: (Hollow) NO.485		(UL) E135710-F5 SJT 3x18AWG 60°C 300V VW-1 c(UL) SJT 3x0.824mm2(18AWG) 60°C 300V FT2							
Key Size	△	3RD	⊕	ACT					
Length (mm)	Tolerance			Part No.	SJT 18AWG 3C 60°C Black SF-31 TO SF-82 CABLE ASSY				
	Critical	Normal	General						
0-15	±0.05	±0.10	±1.0	UNIT	mm	APPROVAL	CHECKER	DRAWER	
15-60	±0.10	±0.20		PAGE	1/2	開發處 2022.10.24 葉瑞	檢驗處 2022.10.24 宋正偉	LQF	
60-150	±0.15	±0.35	±1.5	Draw.No.					
150-350	±0.20	±0.50		±2.0					
350-1000	±0.40	±0.65							