


1800±20mm

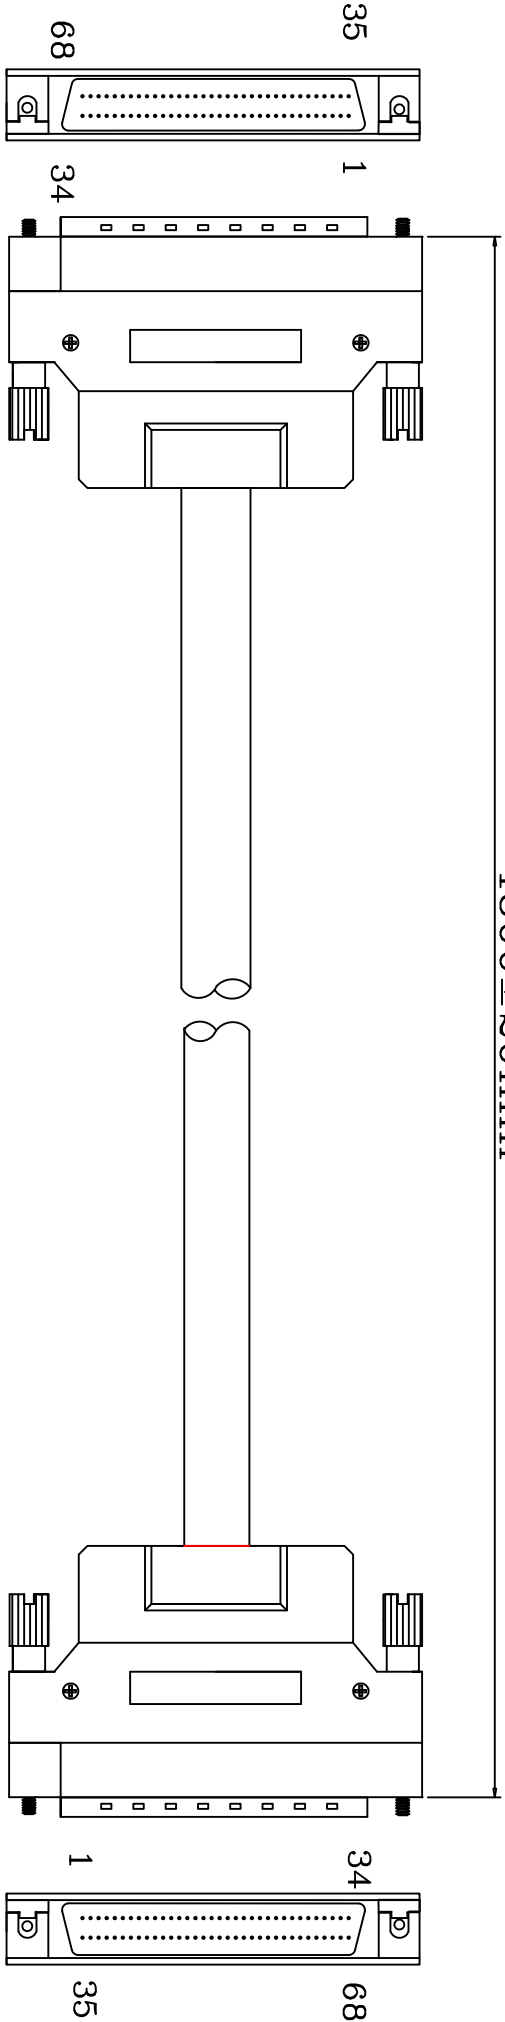


HPD68M
Assembly Metal shell

HPD68M
Assembly Metal shell

NOTE:


1. CABLE:28AWG,UL2919,34 PAIRS,AL+B,OD=10.0mm,BEIGE,PVC JACKET
2. LENGTH:1800mm.
3. CONNECTOR:HPD68P*2PCS.(BLACK INSULATOR NICKEL PLATED,PIN GOLD PLATED)
4. MOLD: ASSEMBLY SHELL
5. SCREW: #2.56 UNC tooth iron screw*4
6. CONTACTS:

HPD68M	1	35	2	36	...	33	67	34	68	64
HPD68M	1	35	2	36	...	33	67	34	68	64
7. OPEN/SHORT TEST:100% TEST.
INSULATION:5M.

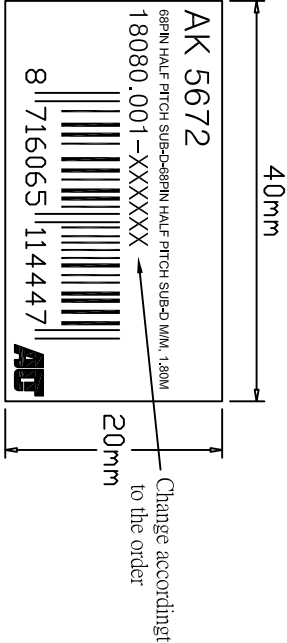

STICKER

STICKER

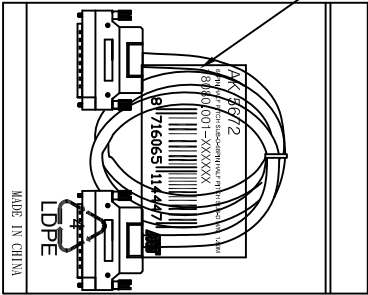

1PCS/PE BAG(0.06*190*300mm)+STICKER

ROHS COMPLIANT

Company	IBV		Goods Code		ATE	D		
ITEM NO.	AK5672		Drawing Evidence:			C	Add "ROHS COMPLIANT"	11.12.21.
Goods NO.						B	Adding packaging info	2011.01.18
Original NO.	S-*****	Unit(mm)				VER. A	REVISE	Date