



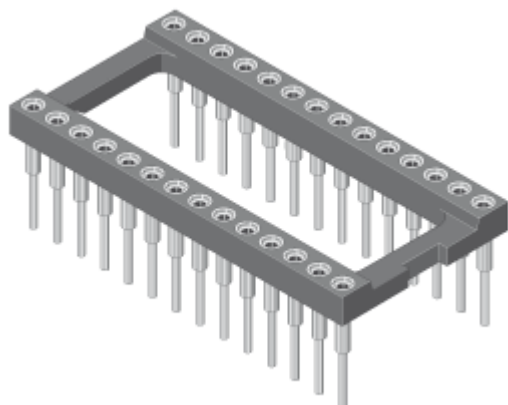


IC-sockets with machined contacts in all common pin counts and row spacing's.
Versions with decoupling capacitor are available as well.

Sockets without centre bar.

Gender Female
Pitch (mm) 2,54
Mating pin size (range) $\varnothing$ 0,40-0,56, ? 0,25x0,45
No of contacts 8
Row distance (code) 300 mil
Contact type **B1** - Standard B



Material contact Copper alloy
Material clip Beryllium copper
Plating contact Sn
Plating clip Au
Insulator Style No Bar
Material insulator High temp. thermoplast UL94V-0
Rated current 3,0 A
Rated voltage 150 V_{RMS} / V_{DC}
Withstand voltage 1000 V_{RMS} for 1 minute
Operating temperature -55°C to +125°C
Max. processing temper. 260°C for 10 seconds
Packaging Tube
Cap Without cap
D (Row dist. mm) 7,62
A 10,10
B 10,10
C 4,40

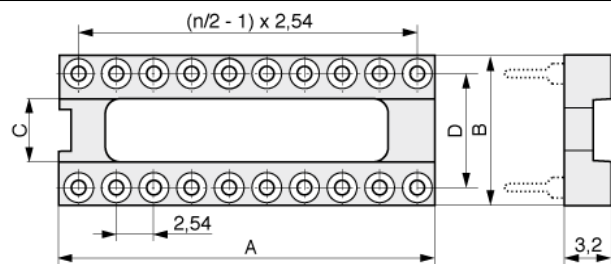

Date: 18.04.2011

Order code: 001-1-008-3-B1STF-XT0



MPE Garry GmbH
Schäfflerstraße 13
87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0
Fax: +49 (0) 83 62 / 91 56-500
Email: vk@mpe-connector.de

Internet: http://www.mpe-connector.de/index.php?lang=en&menu=4&s_product=001-1-008-3-B1STF-XT0