



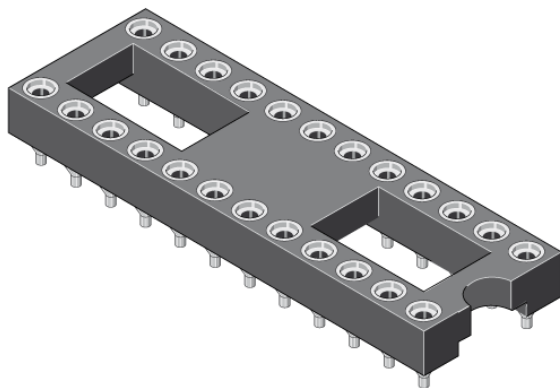


Surface mount sockets with machined floating contacts and integrated pick and place feature. Available in tube or reel packaging.

Gender Female
Pitch (mm) 2,54
Mating pin size (range) $\varnothing$ 0,40-0,56, ? 0,25x0,45
No of contacts 8
Row distance (code) 300 mil
Contact type H1 - SMD Gull Wing



Material contact Copper alloy
Material clip Beryllium copper
Plating contact Sn
Plating clip Au
Material insulator High temp. thermoplast UL94V-0
Rated current 3,0 A
Rated voltage 150 V_{RMS} / V_{DC}
Withstand voltage 1000 V_{RMS} for 1 minute
Operating temperature -55°C to +125°C
Max. processing temper. 260°C for 10 seconds
Packaging Reel
D 7,62
(Row dist. mm)
A 10,10
B 10,10
E 10,10

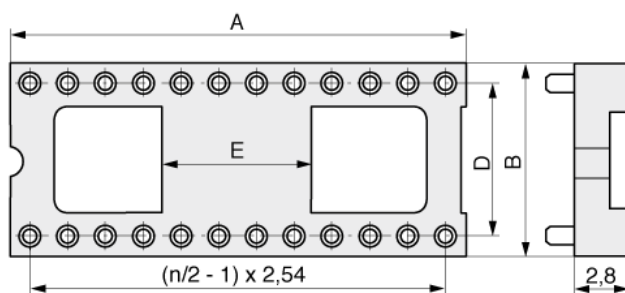

Date: 18.04.2011

Order code: 017-1-008-3-H1STF-LR0



MPE Garry GmbH
Schäfflerstraße 13
87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0
Fax: +49 (0) 83 62 / 91 56-500
Email: vk@mpe-connector.de

Internet: http://www.mpe-connector.de/index.php?lang=en&menu=4&s_product=017-1-008-3-H1STF-LR0