



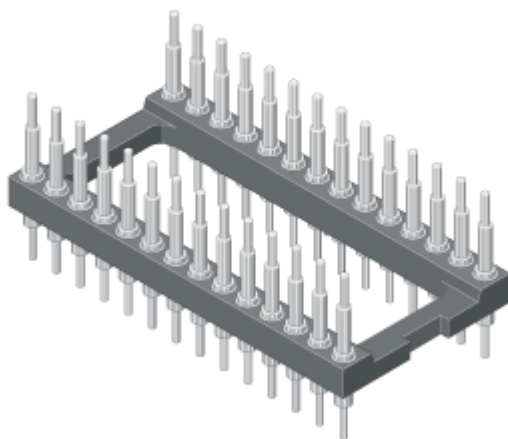


Pin headers, mating with standard female socket contacts. These parts are available with many different contact options.

Socket without centre bar.

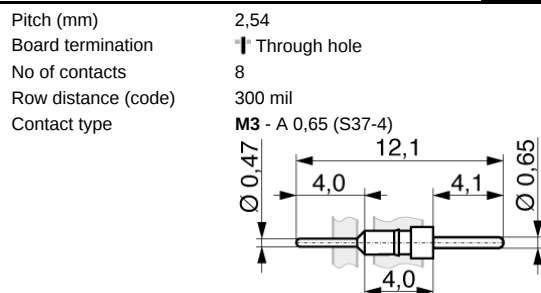

Material contact	Copper alloy
Material insulator	High temp. thermoplast UL94V-0
Rated current	3,0 A
Rated voltage	150 V _{RMS} / V _{DC}
Withstand voltage	1000 V _{RMS} for 1 minute
Operating temperature	-55°C to +125°C
Max. processing temper.	260°C for 10 seconds
Packaging	Standard
D (Row dist. mm)	7,62
A	10,10
B	10,10
C	4,40

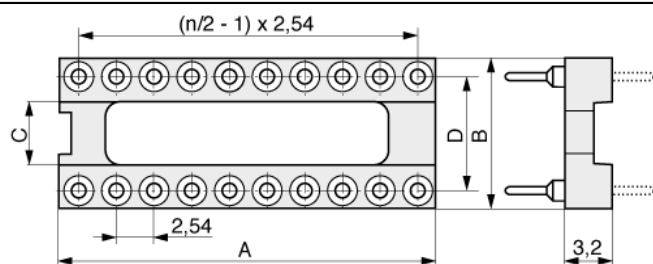

Date: 18.04.2011

Order code: 033-1-008-3-M3T-XS0



MPE Garry GmbH
Schäfflerstraße 13
87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0
Fax: +49 (0) 83 62 / 91 56-500
Email: vk@mpe-connector.de

Internet: http://www.mpe-connector.de/index.php?lang=en&menu=4&s_product=033-1-008-3-M3T-XS0