



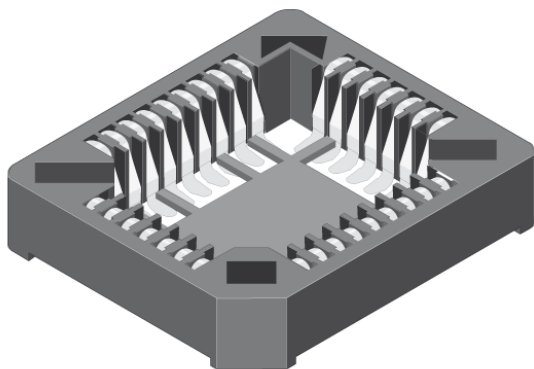


Pitch (mm)	1,27
No of contacts	20
Material contact	Phosphor bronze
Material insulator	High temp. thermoplast UL94V-0
Rated current	1,0 A
Rated voltage	100 V _{RMS} / V _{DC}
Withstand voltage	600 V _{RMS} for 1 minute
Operating temperature	-40°C to +85°C
Max. processing temper.	260°C for 10 seconds
Packaging	Tube
A	15,56
B	15,56
C	5,08
D	5,08
E	18,20
F	12,70

PLCC sockets with SMD terminations (acc. JEDEC MO-047 / MO-052) offering the same PCB-layout as the IC-package.

Standard Variation.

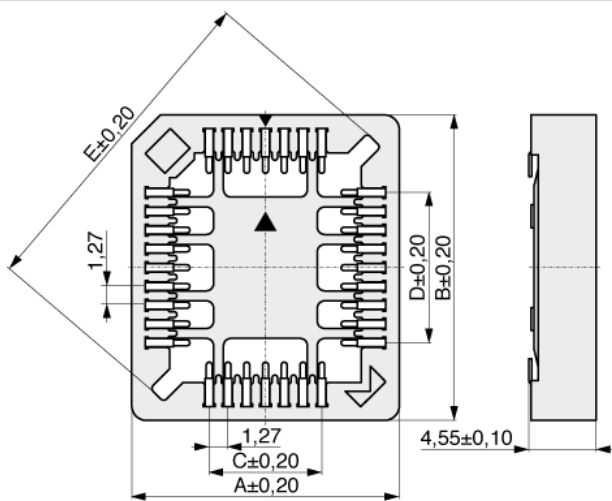

Footprint:



Date: 18.04.2011

Order code: 082-1-020-0-XT0



MPE Garry GmbH
Schäfflerstraße 13
87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0
Fax: +49 (0) 83 62 / 91 56-500
Email: yk@mpe-connector.de

Internet: http://www.mpe-connector.de/index.php?lang=en&menu=4&s_product=082-1-020-0-XT0