


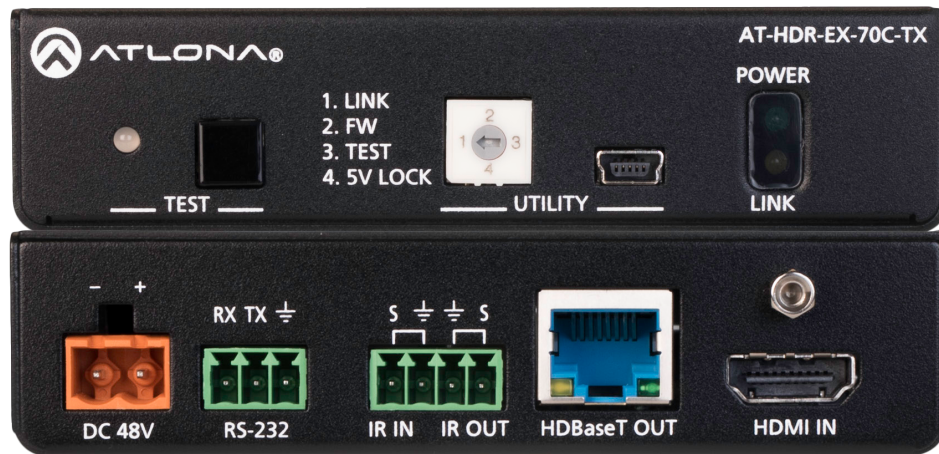

Introduction

The Atlona **AT-HDR-EX-70C-TX** is a HDBaseT™ transmitter for 4K and high dynamic range (HDR) content. It supports extension of 4K/UHD video @ 60 Hz with 4:4:4 chroma sampling plus HDR data, multi-channel audio, control signals, and power up to 130 ft (40 m) or 1080p up to 230 ft (70 m) over Category 6/6A cable.

The HDR-EX-70C-TX is ideal for use with the AT-HDR-EX-70C-RX receiver for transmitting 4K HDR in point-to-point applications. It can also be used with the AT-UHD-CLSO-824 and AT-UHD-SW-5000ED for transmitting 4K/UHD @ 60 Hz 4:2:0 signals to the switchers from a remote source.

Key Features

- HDBaseT transmitter for use with the AT-HDR-EX-70C-RX receiver.
- 4K/UHD capability @ 60Hz with 4:4:4 chroma sampling.
- Supports HDR10, HLG, and Dolby® Vision™ HDR formats.
- Features visually lossless compression with no latency to enable HDR and 4K/60 4:4:4 video signal extension over HDBaseT.
- HDBaseT output transmits AV, control signals, and power up to 130 feet (40 meters) for 4K HDR or 230 feet (70 meters) for 1080p with Category 6/6A.
- Extends bidirectional RS-232 and IR control signals over HDBaseT.
- Provides remote power over HDBaseT to compatible receivers such as the AT-HDR-EX-70C-RX.
- Compliant with HDCP 2.2, the latest specification for passing protected content between devices.
- Multi-channel audio pass-through.
- HDBaseT link status testing allows verification of cable, termination, and link quality for more reliable installations.
- Front panel Power and Link status LEDs.
- Front panel USB port for firmware updates.
- Rear panel connections simplify wire management and save installation time.
- Compact enclosure can be mounted in furniture, a lectern, or an equipment rack.
- Compatible with AT-UHD-CLSO-824 and AT-UHD-SW-5000ED switchers for transmission of 4K/UHD @ 60Hz 4:2:0 signals

Specifications

Video		
Signal	Input: HDMI Output: HDBaseT	
Copy Protection	HDCP 2.2	
Pixel Clock	600MHz	
UHD/HD/SD	4096x2160@60/50/30/25/24Hz 720p@60/59.94/50Hz 3840x2160@60/50/30/25/24Hz 576p@50Hz 1920x1080p@60/59.9/50/30/29.97/25/ 576i@25Hz 24/23.98Hz 480p@60/59.96Hz 1920x1080i@30/29.97/25Hz 480i@30Hz	
VESA All resolutions are 60Hz	2560x1600 1280x800 2048x1536 1366x768 1920x1200 1360x768 1680x1050 1152x864 1600x1200 1024x768 1440x900 800x600 1400x1050 640x480 1280x1024	
VESA 21:9 ⁽¹⁾	2560x1080 @ 30 Hz 4:4:4 3440x1440 @ 50 Hz 4:4:4 2560x1080 @ 60 Hz 4:4:4 3840x1600 @ 30 Hz 4:4:4 3440x1440 @ 30 Hz 4:4:4	
Color Space	YUV, RGB	
Chroma Subsampling	4:4:4, 4:2:2, 4:2:0	
Color Depth	8-bit, 10-bit, 12-bit	
HDR	Up to 4K HDR10 @ 60Hz, 4K Hybrid-Log Gamma (HLG) @ 60Hz, and 4K Dolby® Vision™ @ 60Hz ⁽²⁾	

Audio			
HDMI / HDBaseT Pass-Through Formats	PCM 2.0 LPCM 5.1 LPCM 7.1	Dolby® Digital Dolby Digital Plus™ Dolby TrueHD Dolby Atmos®	DTS® Digital Surround™ DTS-HD Master Audio™ DTS:X®
Bit Depth	up to 24-bit		
Sample Rate	32 kHz, 44.1 kHz, 48 kHz, 88.2 kHz, 96 kHz, 176.4 kHz, 192 kHz		

Resolution / Distance	4K/UHD - Feet / Meters		1080p - Feet / Meters	
HDMI IN/OUT	15	5	30	10
CAT5e	115	35	200	60
CAT6/6a/7	130	40	230	70

Control	
RS-232	Pass through, up to 115200 baud
IR	Pass through, 30kHz to 60kHz

Buttons and Indicators	
TEST button	1 - momentary, tact-type
Function Indicators:	
Power	1 - LED, green
Link	1 - LED, yellow
Test	1 - LED, multi-colored

Connectors	
HDMI IN	1 - Type A, 19-pin female
HDBaseT OUT	1 - RJ45, female
FW - Firmware	1 - Micro-A USB
PWR	1 - 2-pin 48V captive screw connector
RS-232	1 - 3-pin captive screw connector
IR	1 - 4-pin captive screw connector

Temperature	Fahrenheit	Celsius
Operating	32 to 122	0 to 50
Storage	-4 to 140	-20 to 60
Humidity (RH)	20% to 90%, non-condensing	

Power	
Consumption	6.07W
BTU/h	20.7
Input	100 - 240 V AC, 50/60 Hz
Supply	48 V DC, 0.83 A

Dimensions (H x W x D)	Inches	Millimeters
Device	1.02 x 4.29 x 5.00	26 x 109 x 127
Power Supply (AT-PS-48083-C)	1.42 x 1.81 x 4.41	36 x 46 x 112

Weight	Pounds	Kilograms
Device	0.85	0.39

Certification	
Device	CE, FCC
Power Supply	CE, FCC, cULus, RoHS, CCC, RCM

Compliance	
NDAA-889	Yes
TAA	Yes

Warranty	
Device	To view the product warranty, use the following link: https://atlona.com/warranty

Footnotes

(1) The following UltraWide Quad HD resolutions are NOT supported:

3440x1440P@50 10 bit 4:4:4
3440x1440P@60 10 bit 4:4:4
3840x1600P@60 8 bit 4:4:4.

(2) 4K Dolby® Vision™ @ 60Hz is supported on systems capable of Low Latency Dolby Vision (LLDV) mode.
All other 4K modes limited to 30Hz.

Copyright, Trademark, and Registration

© 2025 Atlona Inc. All rights reserved. “Atlona” and the Atlona logo are registered trademarks of Atlona Inc. Pricing, specifications and availability subject to change without notice. Actual products, product images, and online product images may vary from images shown here.



The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.



Dolby, Dolby Atmos, and the double-D symbol are registered trademarks of Dolby Laboratories Licensing Corporation.



For DTS patents, see <http://patents.dts.com>. Manufactured under license from DTS, Inc. DTS, the Symbol, DTS and the Symbol together, and Digital Surround are registered trademarks and/or trademarks of DTS, Inc. in the United States and/or other countries. © DTS, Inc. All Rights Reserved.

All other trademark(s), copyright(s), and registered technologies mentioned in this document are the properties of their respective owner(s).