



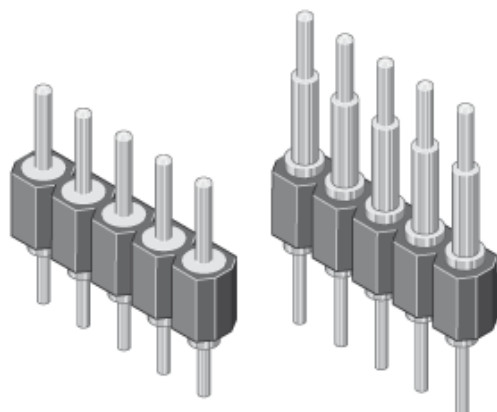

Pitch (mm) 2,54
 Board termination $\uparrow$ Through hole
 No of contacts 1
 Contact type M1 - A 0,5 (S41-4)



Material contact Copper alloy
 Material insulator High temp. thermoplast UL94V-0
 Rated current 3,0 A
 Rated voltage 150 V_{RMS} / V_{DC}
 Withstand voltage 1000 V_{RMS} for 1 minute
 Operating temperature -55°C to +125°C
 Max. processing temper. 260°C for 10 seconds
 Packaging Standard

Pinadapter available with many different contact options.

Single row socket strip (SIL).



Date: 18.04.2011

Order code: 034-1-001-D-M1T-XS0



MPE Garry GmbH
 Schöfflerstraße 13
 87629 Füssen/Germany

Phone: +49 (0) 83 62 / 91 56-0
 Fax: +49 (0) 83 62 / 91 56-500
 Email: vk@mpe-connector.de

Internet: http://www.mpe-connector.de/index.php?lang=en&menu=4&s_product=034-1-001-D-M1T-XS0