
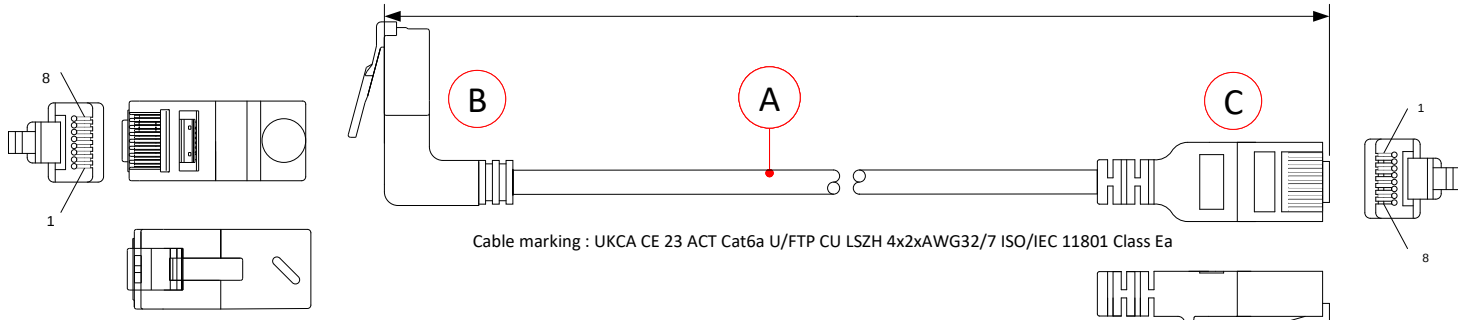



	8	7	6	5	4	3	2	1																												
H									H																											
G	Cable marking : UKCA CE 23 ACT Cat6a U/FTP CU LSZH 4x2xAWG32/7 ISO/IEC 11801 Class Ea								G																											
F									F																											
E	<table><tr><th colspan="2">Specifications</th></tr><tr><td>Type</td><td>CAT6A slimline up to straight</td></tr><tr><td>Shielding</td><td>Yes, U/FTP</td></tr><tr><td>Max. bandwidth</td><td>500Mhz</td></tr><tr><td>Standard</td><td>ISO/IEC 11801 Class EA</td></tr><tr><td>Temperature range</td><td>Operational -20°C to +60°C / 40~60%</td></tr><tr><td></td><td>Installation 0°C to +50°C / 40~60%</td></tr><tr><td>Wiring</td><td>T568B</td></tr><tr><td>Impedance</td><td>100Ω</td></tr><tr><td>Conductor DC resistance</td><td>58.3Ω / 100m maximum</td></tr><tr><td>Max tractive force</td><td>50N</td></tr></table>								Specifications		Type	CAT6A slimline up to straight	Shielding	Yes, U/FTP	Max. bandwidth	500Mhz	Standard	ISO/IEC 11801 Class EA	Temperature range	Operational -20°C to +60°C / 40~60%		Installation 0°C to +50°C / 40~60%	Wiring	T568B	Impedance	100Ω	Conductor DC resistance	58.3Ω / 100m maximum	Max tractive force	50N	E					
Specifications																																				
Type	CAT6A slimline up to straight																																			
Shielding	Yes, U/FTP																																			
Max. bandwidth	500Mhz																																			
Standard	ISO/IEC 11801 Class EA																																			
Temperature range	Operational -20°C to +60°C / 40~60%																																			
	Installation 0°C to +50°C / 40~60%																																			
Wiring	T568B																																			
Impedance	100Ω																																			
Conductor DC resistance	58.3Ω / 100m maximum																																			
Max tractive force	50N																																			
D									D																											
C	<table><tr><th>Item</th><th>Color</th><th>Length(m)</th></tr><tr><td>DA4930</td><td>Black</td><td>0.15</td></tr><tr><td>DA4952</td><td>Black</td><td>0.25</td></tr><tr><td>DA4900</td><td>Black</td><td>0.5</td></tr><tr><td>DA4901</td><td>Black</td><td>1</td></tr><tr><td>DA4951</td><td>Black</td><td>1.5</td></tr><tr><td>DA4902</td><td>Black</td><td>2</td></tr><tr><td>DA4903</td><td>Black</td><td>3</td></tr><tr><td>DA4905</td><td>Black</td><td>5</td></tr></table>								Item	Color	Length(m)	DA4930	Black	0.15	DA4952	Black	0.25	DA4900	Black	0.5	DA4901	Black	1	DA4951	Black	1.5	DA4902	Black	2	DA4903	Black	3	DA4905	Black	5	C
Item	Color	Length(m)																																		
DA4930	Black	0.15																																		
DA4952	Black	0.25																																		
DA4900	Black	0.5																																		
DA4901	Black	1																																		
DA4951	Black	1.5																																		
DA4902	Black	2																																		
DA4903	Black	3																																		
DA4905	Black	5																																		
B	<table><tr><th colspan="2">T568B wiring connection</th></tr><tr><td>1</td><td>White/Orange</td></tr><tr><td>2</td><td>Orange</td></tr><tr><td>3</td><td>White/Green</td></tr><tr><td>4</td><td>Blue</td></tr><tr><td>5</td><td>White/Blue</td></tr><tr><td>6</td><td>Green</td></tr><tr><td>7</td><td>White/Brown</td></tr><tr><td>8</td><td>Brown</td></tr></table>								T568B wiring connection		1	White/Orange	2	Orange	3	White/Green	4	Blue	5	White/Blue	6	Green	7	White/Brown	8	Brown	B									
T568B wiring connection																																				
1	White/Orange																																			
2	Orange																																			
3	White/Green																																			
4	Blue																																			
5	White/Blue																																			
6	Green																																			
7	White/Brown																																			
8	Brown																																			
A	<table><tr><th colspan="2">Plug (B,C)</th></tr><tr><td>Connector B</td><td>RJ45 8P8C + molded boot, angled up</td></tr><tr><td>Connector C</td><td>RJ45 8P8C + molded boot</td></tr><tr><td>Contact plating</td><td>50μm Gold-plated</td></tr><tr><td>Wire Contact</td><td>IPC</td></tr></table>								Plug (B,C)		Connector B	RJ45 8P8C + molded boot, angled up	Connector C	RJ45 8P8C + molded boot	Contact plating	50μm Gold-plated	Wire Contact	IPC	A																	
Plug (B,C)																																				
Connector B	RJ45 8P8C + molded boot, angled up																																			
Connector C	RJ45 8P8C + molded boot																																			
Contact plating	50μm Gold-plated																																			
Wire Contact	IPC																																			
	8	7	6	5	4	3	2	1																												

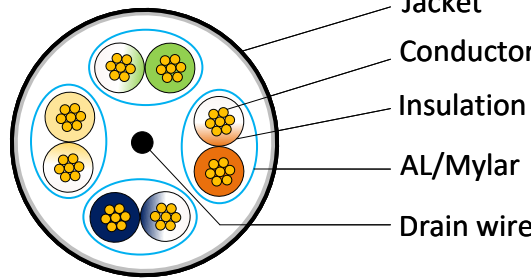

ACT CAT6A U/FTP LSZH Slimline angled up to straight Patch cord

Item : DA49xx series

Revision : A

Date : 25-04-2025

Drawn by : MDS

This drawing is proprietary information of ACT Connectivity Solutions and confidential and provided to you for internal use on a need to know basis only. This document may not be duplicated for or disseminated to any third party without the prior explicit written consent of ACT Connectivity Solutions. Copies of this document, Printed or electronic, are uncontrolled and intended only for immediate use.