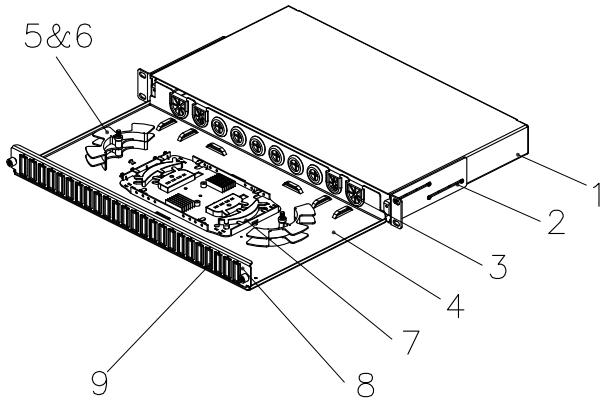

SCALE 1/10

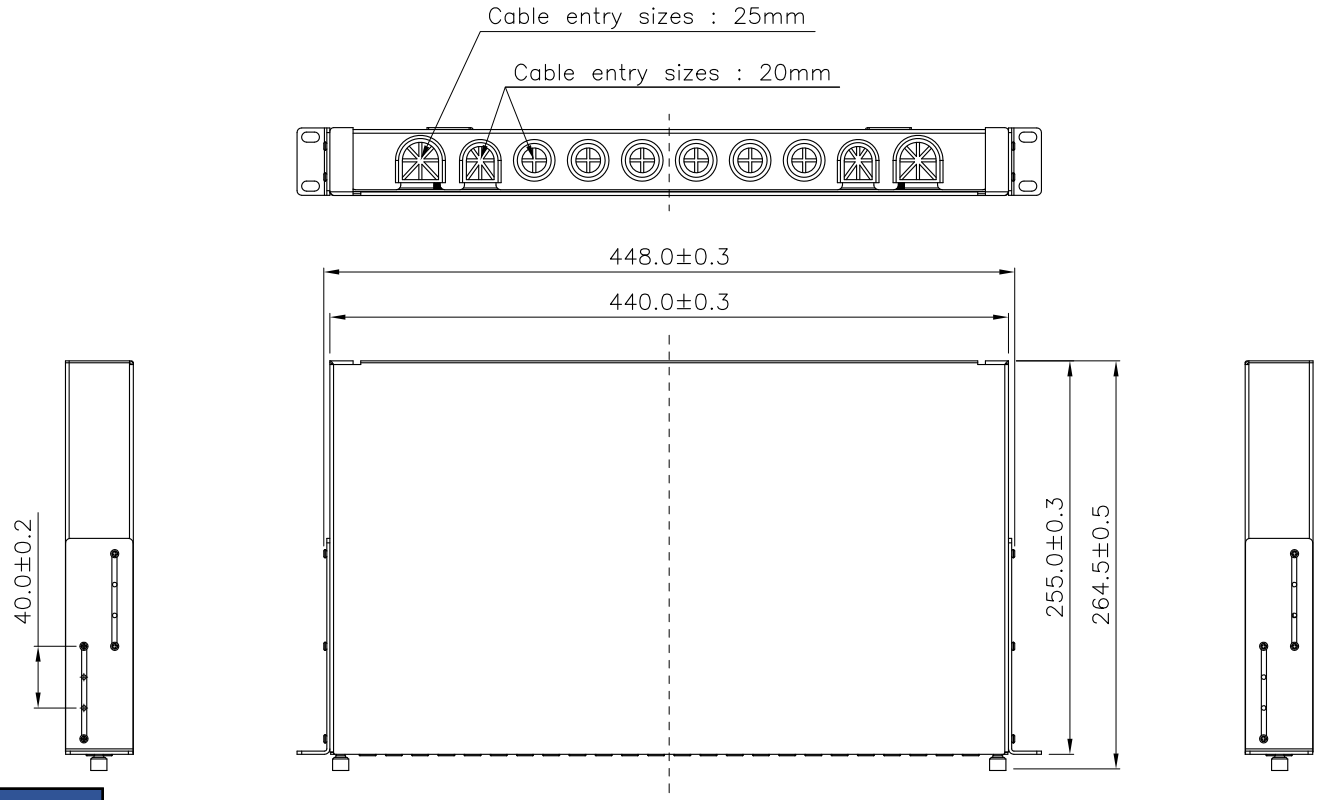

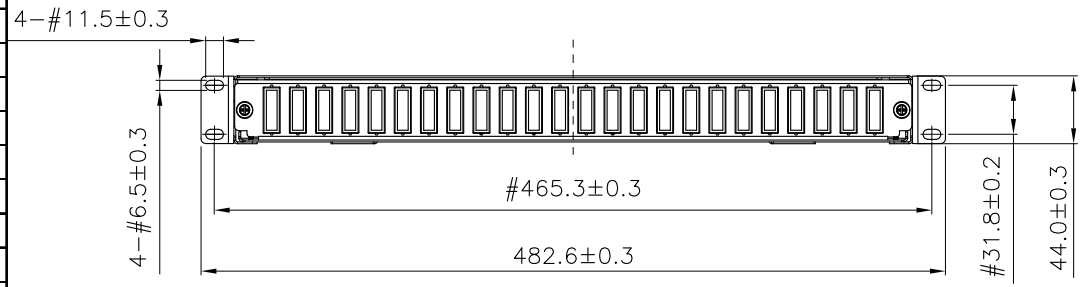

Specification	
1. Panel Cover	SECC, 1.2mm thickness, BK
2. Rack mount brackets	SPCC, 2.0mm thickness, BK
3. Grommet	10 pcs, PVC, BK
4. Tray	SECC, 1.2mm thickness, BK
5. Removable L-pin	2 pcs, SPCC, Ø5.0*40mm
6. Cable routing spool	2 sets, ABS, IV
7. 24-port splice tray	1 pc, ABS+PC, BK
8. Front plate	SPCC, 1 .2mm thickness, BK
9. Adapter blank insert	24pcs, ABS, BK
Dimensions	Width 19" (482.6mm) x Depth 10" (255.0mm) x Height 1U (44.0mm)
Shelf mounting adjustment range	0~40 mm

Accessory	
Cable tie	6 pcs, 150mm length, BK, Nylon 66
Cable twist tie	6 pcs
Cable gland	2 pcs, M20
Removable L-pin	1 pc. SPCC,Ø5.0*40mm
24-port splice tray	3 pc, ABS+PC, BK

Drawn by : DANIEL

FIBER PANEL 48P UNLOADED

Item : FA2095

Revision : 1.0

Date : 28-06-2024

This drawing is proprietary information of ACT Connectivity Solutions and confidential and provided to you for internal use on a need to know basis only.
This document may not be duplicated for or disseminated to any third party without the prior explicit written consent of ACT Connectivity Solutions.
Copies of this document, Printed or electronic, are uncontrolled and intended only for immediate use.

0 10cm