


		2	3	4	5	6	7	8	
F	(PG9)		(M16*1.5)	△B	REV.	ECN NO.	DATE	SIGN	DESCRIPTION
					B	LEN1580021~022	2015/07/24	Yulong_wang	Change to Share Drawing.
	Recommended Panel Cut-Out		Recommended Panel Cut-Out		C	LEN1690149~150	2016/08/24	Yulong_wang	Add 3, 5 Pin & IP69K.
E									
D									
C									
B					Note: △ * Important Dimension. △ * Waterproof Rate: IP68, IP69K. * Housing: Nylon+GF, Black. * Female Pin: Copper Alloy, Gold Plated. * Shield: Zinc Alloy, Nickel Plated. * Screw Nut: Zinc Alloy, Nickel Plated. * Panel O-Ring: Viton, Black. * Housing O-Ring: Viton, Green. △ * Rated Voltage: 3 & 4Pin 250V dc. or ac. 5Pin 60V dc. or ac. * Rated Current: 4A * Operating Temperature: -40~+105°C * For Panel Thickness Max 4.5mm. * Recommended Nut Torque: 4-6 Kgf.cm.				
	Pin Assignment Front View								
A	UNIT:mm			TITLE		ITEM NO		DRAWN BY	DATE
TOLERANCE		M12 D-Code Female Conn. PCB Type Unshielded		SCALE		DWG NO		Yulong_wang	2016-08-24
.X ±0.25		3:2		SIZE A4		M12D-XXPFFP-SF8XXX		CHECKED BY	DATE
.XX ±0.1		SHEET 1 OF 2		REV. C		CUSTOMER ALTW		Cary	2016-08-24
.XXX ±0.05		WC-REV. A.5		△C: Inspection item		APPROVED BY		Jerry	DATE
ANGLES ±1°									2016-08-24
		2	3	4	5	6	7	8	FMW10702-01-02A1

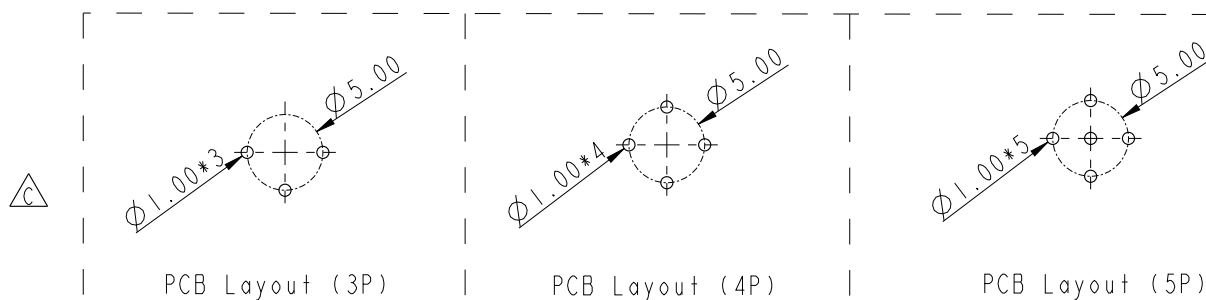

UNIT:mm				TITLE M12 D-Code Female Conn. PCB Type Unshielded			Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO		DRAWN BY Yulong_wang		DATE 2016-08-24		
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±		SCALE 3:2		SIZE A4		SHEET 2 OF 2			DWG NO M12D-XXPFFP-SF8XXX		CHECKED BY Jinhai		DATE 2016-08-24		
		REV. C		WC-REV. A.4		(QC): Inspection item			CUSTOMER ALTW		APPROVED BY Jerry		DATE 2016-08-24		