


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
E	C180642	2018/12/21	Ruru	Modify Drawing Mark Cable Length
F	C201754	2020/11/09	Ruru	△F X3
G	C210219	2021/03/11	Vicky	△G X2

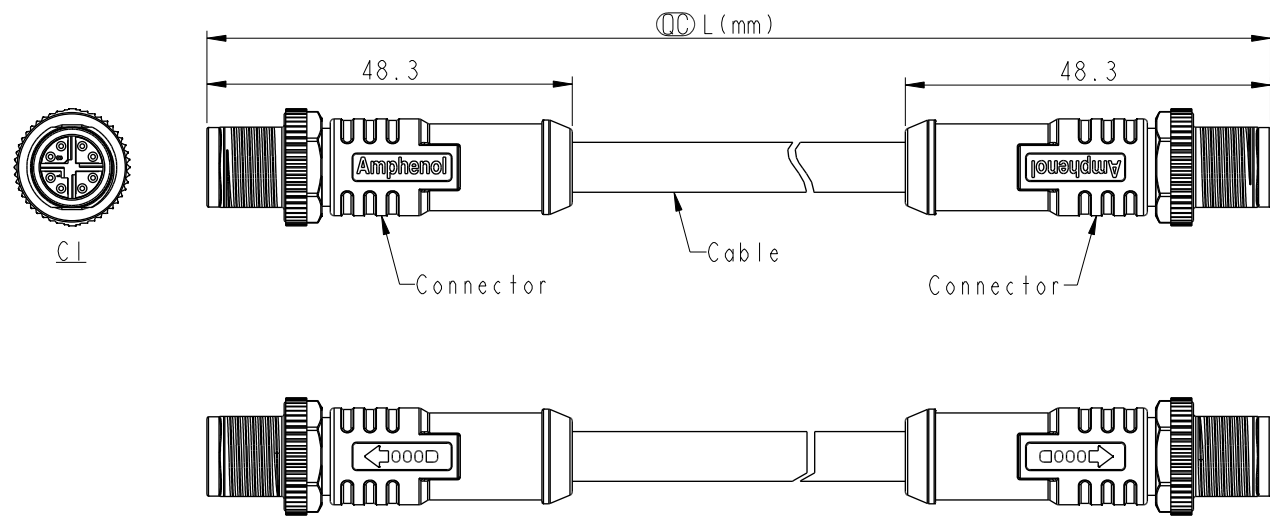

△FMSXSXXML-SXSML-SGXXX△E


XX: No. Of Pin

XXX: 0.5~40Meters
A05: 0.5 Meter
001: 01 Meter
002: 02 Meters
:
040: 40 Meters

△F△G Note:

- * RoHS Compliant
- * Ⓞ Important dimensions
- * Waterproof rate: IPX7, mated
- * Connector
Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated
Nut: Metal
Shield: Metal
Outer Mold: Thermoplastic, Black
- * Cable: CAT-6A, S/FTP, 26AWG*4P+AL+B, LSZH Jacket, OD 6.6mm, Green
- * Cable Length Tolerance: 0.5M < L ≤ 1M: +60/-0 mm
1M < L ≤ 3M: +120/-0 mm
3M < L ≤ 5M: +160/-0 mm
5M < L ≤ 10M: ±100 mm
10M < L ≤ 20M: ±200 mm
20M < L ≤ 30M: ±300 mm
30M < L ≤ 100M: ±500 mm

Shield	Braid	編織	Shield
8	Blue	藍	8
7	White/Blue	白/藍	7
6	Brown	棕	6
5	White/Brown	白/棕	5
4	Green	綠	4
3	White/Green	白/綠	3
2	Orange	橘	2
1	White/Orange	白/橘	1
C1	Wire Color		C2



8P

Pin Assignment
Front View

Pin Out

UNIT:mm				TITLE ACC, SEN, X Code, DB-ENDED 		
TOLERANCE			MM			
±0.5 mm			SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. G			WC-REV. A.3	 :Inspection item		

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE