





THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2018/04/11	Chingmei	New Release



Conn.

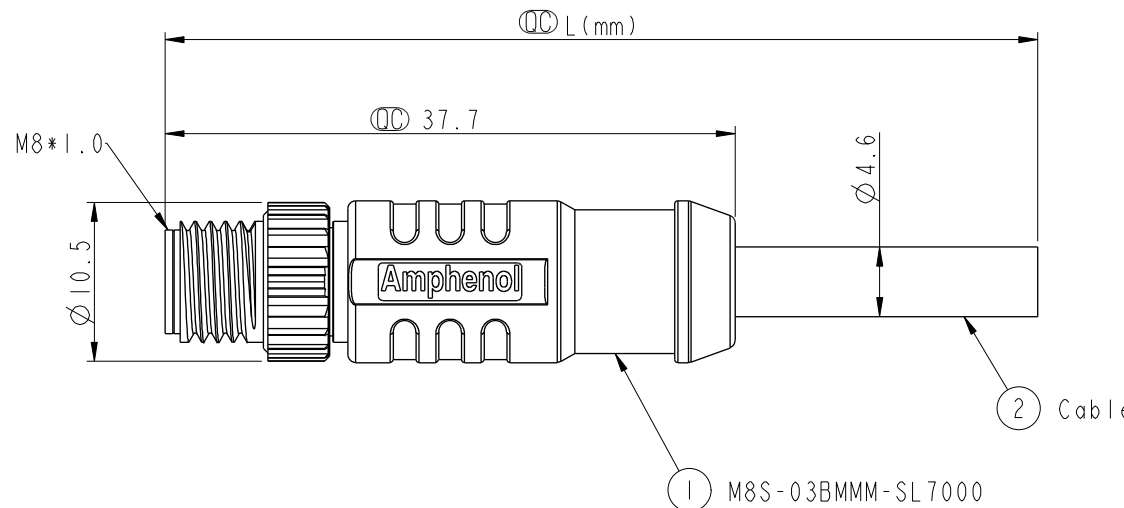

比例 3:1

Pin Assignments
Front View

4	Black 黑
3	Blue 藍
1	Brown 棕
Conn. Wire Color	
Pin Out	

M8S-03BMMM-SL7AXX

↓
(Cable Length)
XX: 01~99Meters
01: 01Meter
02: 02Meters
:
:
99: 99Meters

- Note:
- * (DD) Important Dimension
 - * Waterproof Rate: IP67
 - * Connector: Nylon, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Screw Nut: Zinc Alloy, Nickel Plated
 - * Cable: 3C*24#+AL/MY+B, PVC Jacket, Black
 - * Cable Length Tolerance: 01M: ±40mm
02~05M: ±60mm
06~10M: ±100mm
11~30M: ±200mm
31~99M: ±500mm

UNIT:mm	
TOLERANCE	±0.5mm

TITLE M8 SHIELD CONN WITH KEY CABLE SCREW 3PIN M CONN M PIN			
SCALE 2:1	SIZE A4	SHEET 1	OF 1
REV. A	WC-REV. A.5	(DD) Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO M8S-03BMMM-SL7AXX	DRAWN BY Chingmei	DATE 2018/04/11
DWG NO M8S-03BMMM-SL7AXX	CHECKED BY Neo	DATE 2018/04/11
CUSTOMER ALTW	APPROVED BY Max	DATE 2018/04/11