


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C201756 & 57	2020/11/16	Vicky	 X4
C	C210021	2021/01/07	Vicky	 X2
D	C210227	2021/03/30	Vicky	 X4



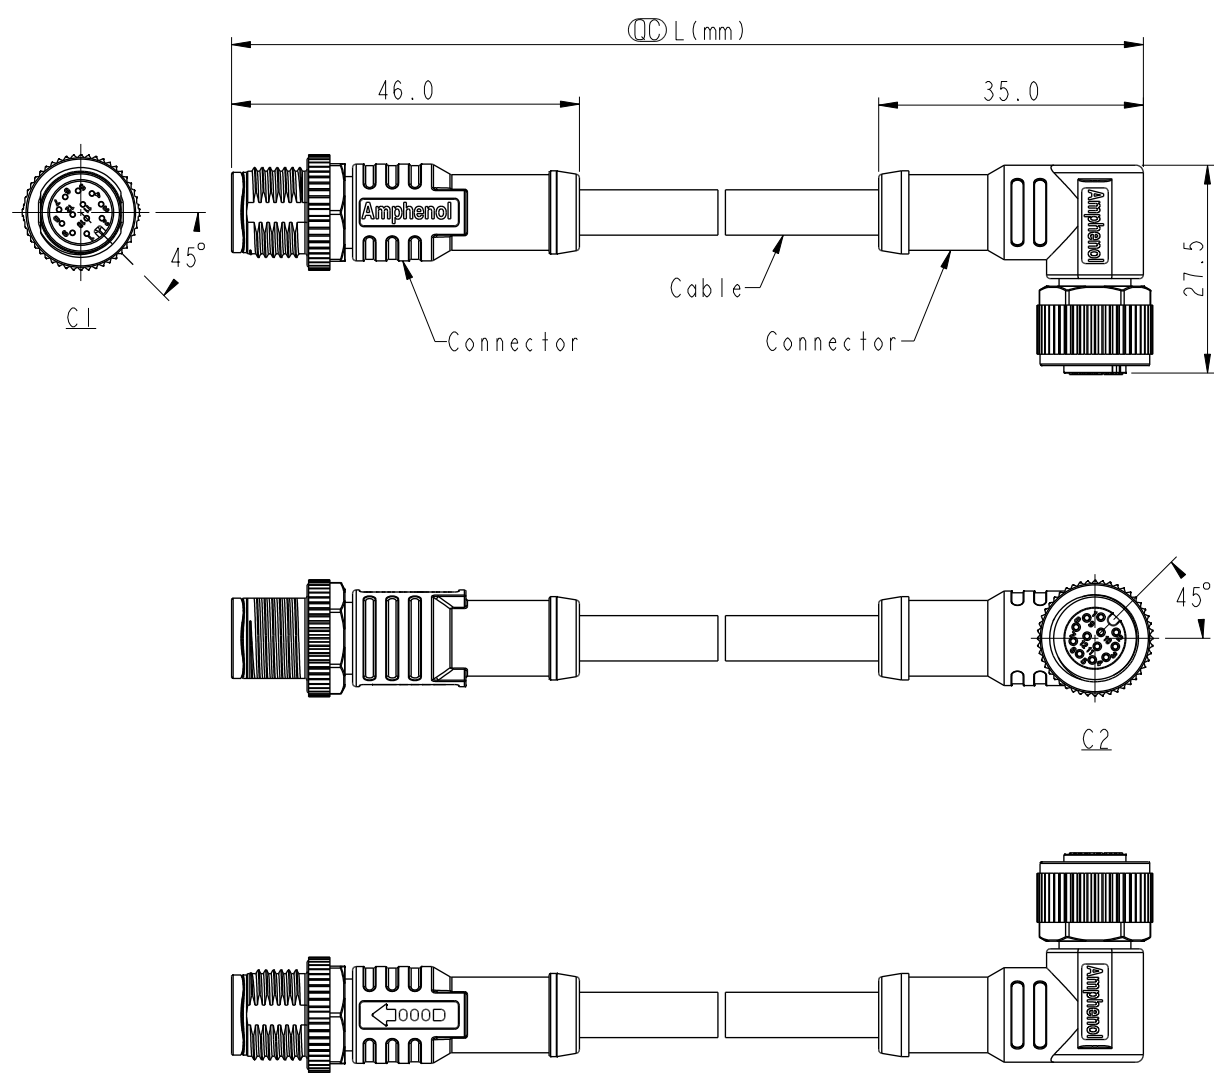

Note:

- * RoHS Compliant
- *  Important dimension
- * C1
Waterproof rate: IPX8, mated 1m/24h
IPX9K, mated
Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated
-  Nut: Metal
Outer Mold: Thermoplastic, Black
- * C2
Waterproof rate: IPX8, mated 1m/24h
IPX9K, mated
Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated
O-Ring: Rubber, Green
-  Nut: Metal
Outer Mold: Thermoplastic, Black
- * Cable: UL2517, PVC Jacket, Black
- * Cable Length Tolerance: 0.5M < L ≤ 1M: +60/-0 mm

1M < L ≤ 3M: +120/-0 mm
3M < L ≤ 5M: +160/-0 mm
5M < L ≤ 10M: ±100 mm
10M < L ≤ 20M: ±200 mm
20M < L ≤ 30M: ±300 mm
30M < L ≤ 99M: ±500 mm

UNIT:mm		TITLE	ACC, SEN, A Code, DB-ENDED 
TOLERANCE		SCALE	1:2
±0.5mm		SIZE	A4
		SHEET	1 OF 2
		REV.	D
		WC-REV.	A.1
			Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Vicky	2018-12-05
DWG NO	CHECKED BY	DATE
 M12AXXML-12AFR-SDXXX	Rita	2018-12-05
CUSTOMER	APPROVED BY	DATE
ALTW	Max	2018-12-05

	1	2	3	4	5
F	 MI2AXXML-12AFR-SDXXX XX: No. Of Pin XXX: 0.5~99Meters A05: 0.5 Meter 1: 01 Meter 2: 02 Meters : 00: 00 Meters				