




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C201748	2020/11/11	Ruru	$\triangle B$ X5
C	C210230	2021/04/01	Vicky	$\triangle C$ X4

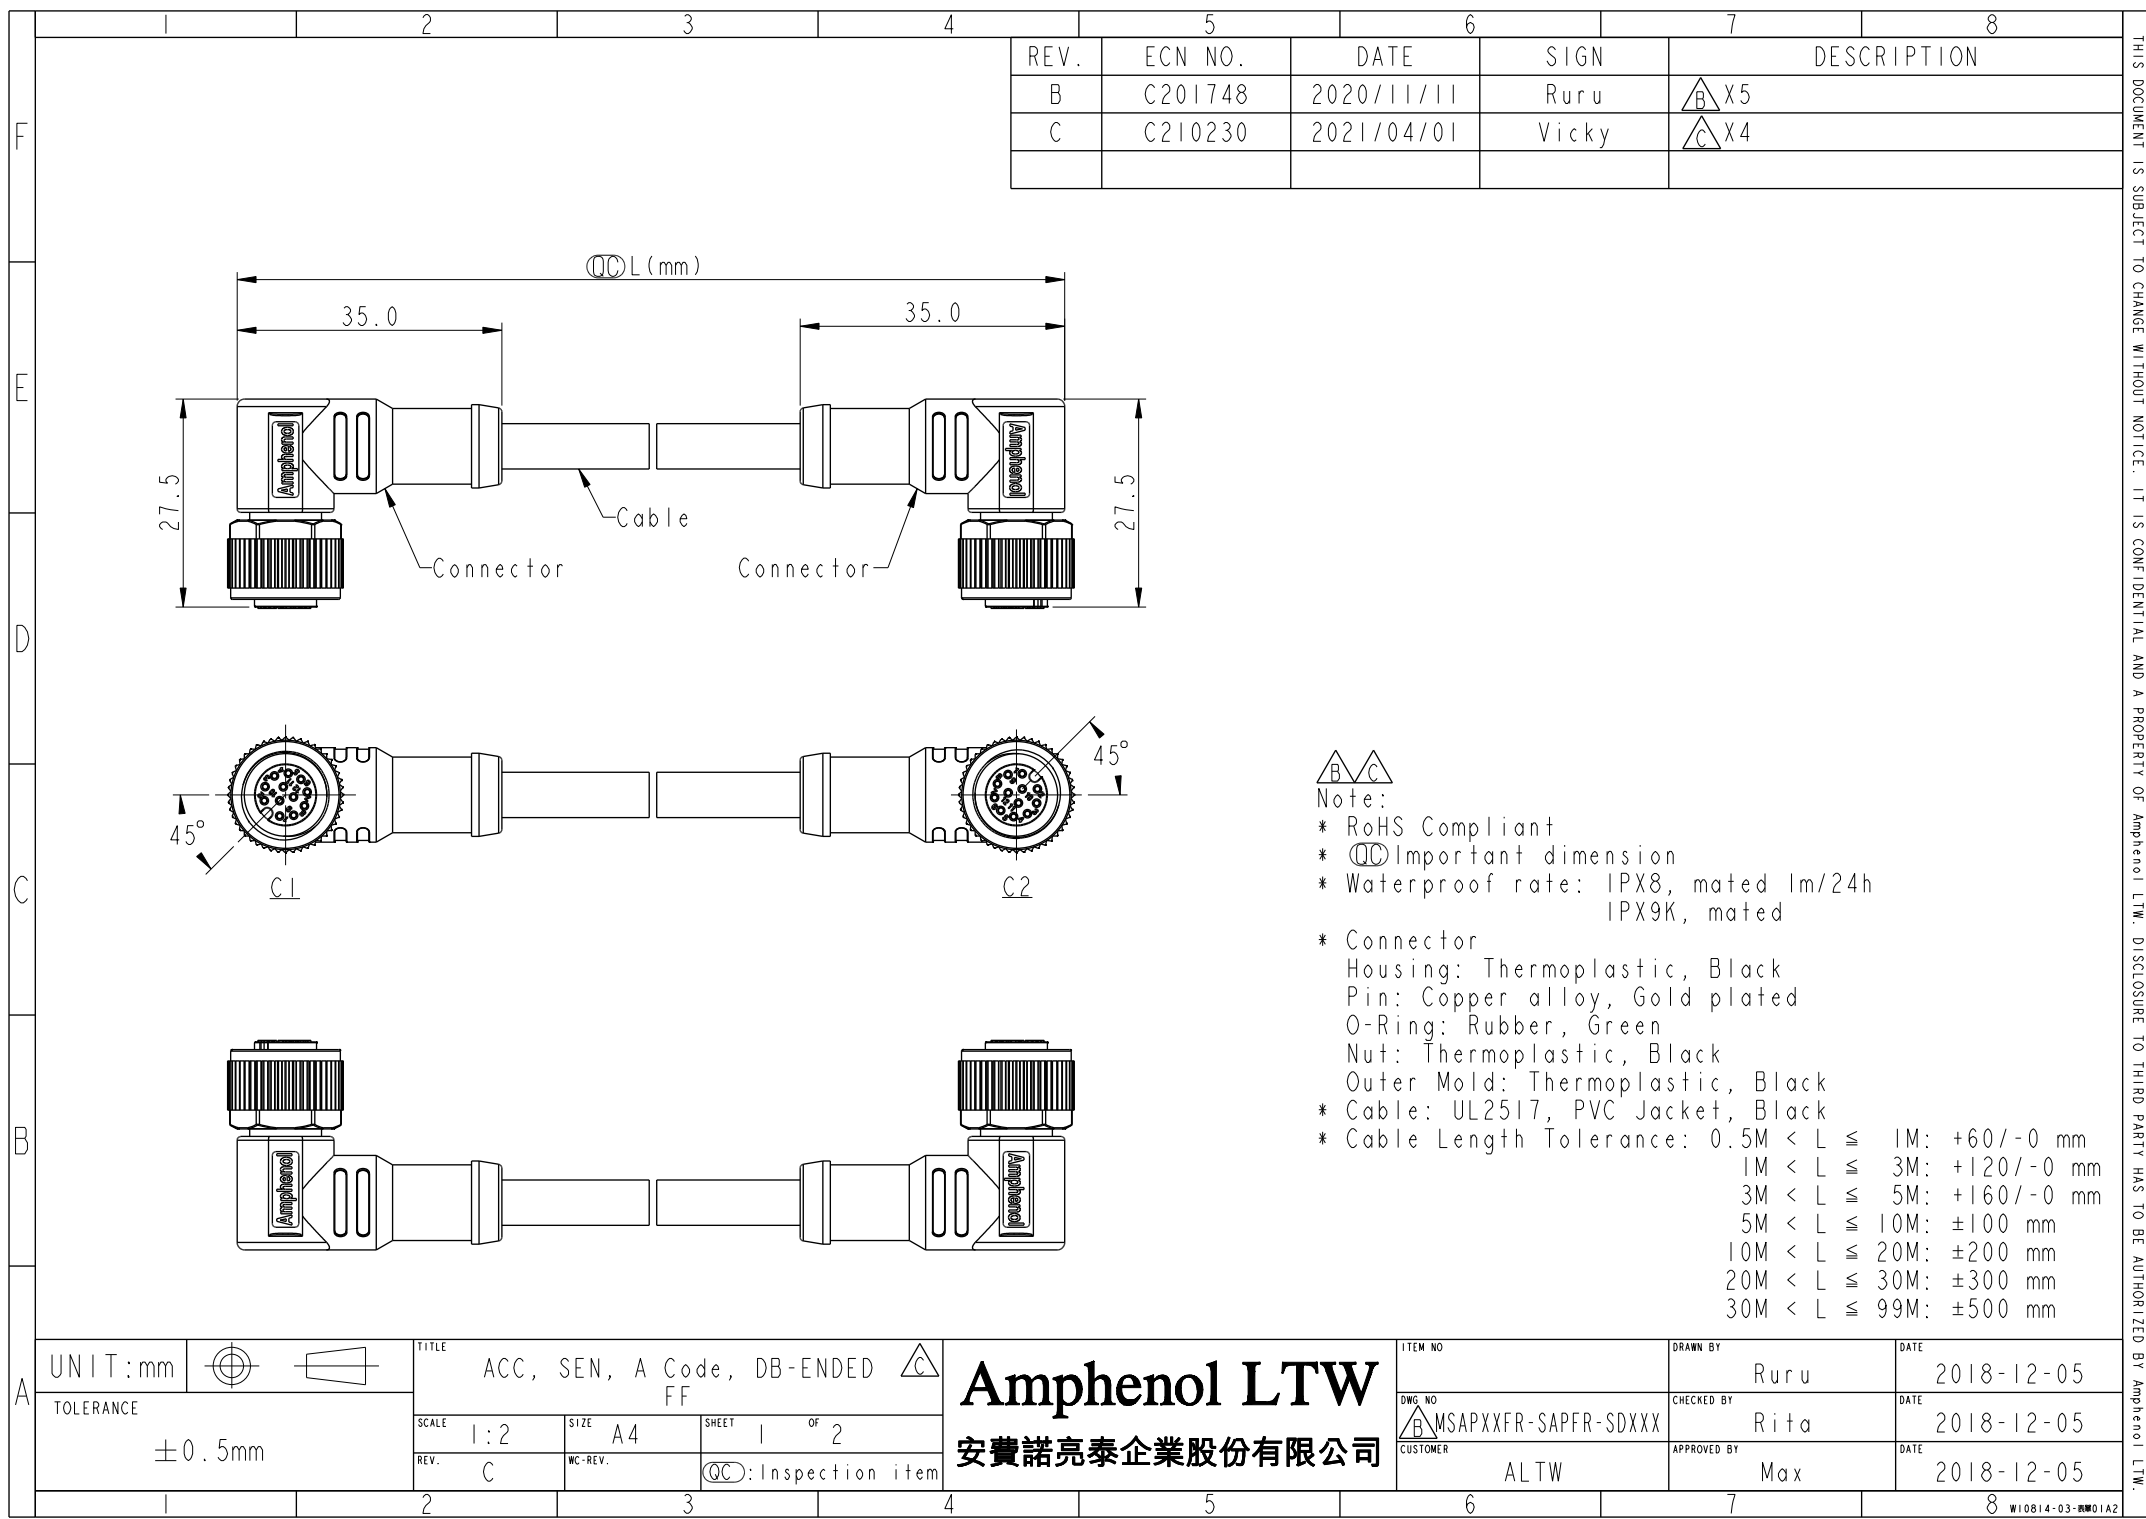

Note:

- * RoHS Compliant
- * $\varnothing$ Important dimension
- * Waterproof rate: IPX8, mated 1m/24h
IPX9K, mated
- * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - O-Ring: Rubber, Green
 - Nut: Thermoplastic, Black
 - Outer Mold: Thermoplastic, Black
- * Cable: UL2517, PVC Jacket, Black
- * Cable Length Tolerance:

0.5M < L ≤ 1M	: +60/-0 mm
1M < L ≤ 3M	: +120/-0 mm
3M < L ≤ 5M	: +160/-0 mm
5M < L ≤ 10M	: ±100 mm
10M < L ≤ 20M	: ±200 mm
20M < L ≤ 30M	: ±300 mm
30M < L ≤ 99M	: ±500 mm

UNIT:mm		TITLE			ACC, SEN, A Code, DB-ENDED			
TOLERANCE		SCALE			SIZE		SHEET	
± 0.5mm		1:2			A4		1 OF 2	
		REV.			WC-REV.		QC: Inspection item	
		C						

Amphenol LTW		ITEM NO	DRAWN BY	DATE
安費諾亮泰企業股份有限公司			Ruru	2018-12-05
		DWG NO	CHECKED BY	DATE
		BMSAPXXFR-SAPFR-SDXXX	Rita	2018-12-05
		CUSTOMER	APPROVED BY	DATE
		ALTW	Max	2018-12-05

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

F

D

C

B

A