

LAVA DSerial-PCI

PCI Bus Dual 16550 Serial Board

Features & Benefits

- Adds two 9-pin 16550 UART serial ports to PCI-equipped PCs
- Each port is capable of a maximum data throughput rate up to 115.2 kbps
- Both ports share one IRQ – saves valuable resources for other expansion cards
- Easy Plug and Play installation – automatically selects next available IRQ and I/O addresses
- Includes Lava Com Port Redirect Utility for renaming Com ports – allows for backward compatibility with software that supports Com 1-4 only
- Compatible with RS-232 serial peripherals including modems, PDAs, digital cameras, bar-code scanners, and UPSes
- Compliant with PCI Specification 2.1
- Lava Lifetime Warranty


Connectors

- Two DB-9 male RS-232

System Requirements

PCI host slot

Drivers ship with product. For updated software support visit www.lavalink.com.

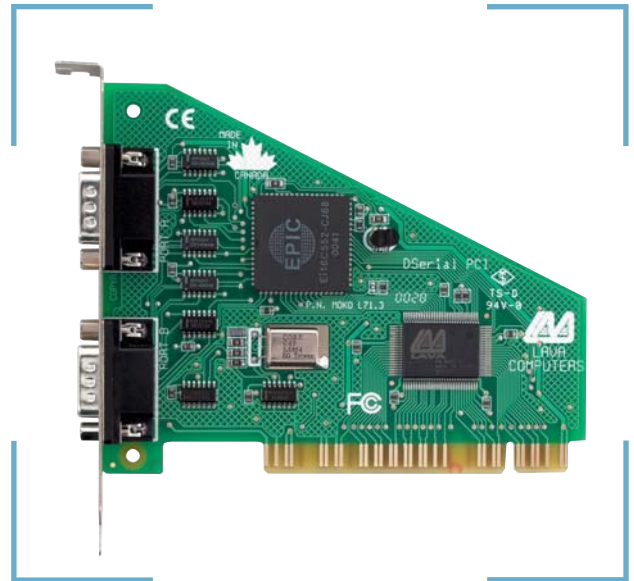

FC CE

