



DPU3000

Tiny Universal
DisplayPort Graphics Splitter



Introduction




SUNIX Tiny Universal Graphics Splitter is an innovative, external multi-display adapter that allows end users to enjoy multiple monitors from Ultrabook single digital DisplayPort source. You can make photos and videos bigger and louder by connecting your Notebook PC's to a TV, external display, or projector. For example, you can watch movies on a big screen by connecting SUNIX Tiny Universal Graphics Splitter to an HDTV. With flexible VGA, HDMI, and DisplayPort video output conversions, wide range of converters no longer needed.

SUNIX Tiny Universal Graphics Splitter adopts DisplayPort innovative technology that supports 3 video connections working simultaneously (Note 1). You can expand 3 displays at the same time for gaming, graphics design or spreadsheet analysis; or you can choose to dedicate each monitor to a separate application. With plug-n-play, simplifying configuration, driver free features, SUNIX Tiny Universal Graphics Splitter is a smart solution to video conversion on Microsoft Windows and Linux based computer.

Features


- Tiny design integrates DisplayPort, HDMI, and VGA (RGB) connectivity.
- Enables 3 monitors working simultaneously with video mirror or extension mode (Note 1).
- Triple monitors output resolution up to 2560X1600@60Hz/each from single DP1.2 MST source.
- 6 combined monitors up to 5760x2160 by connecting two dongles from dual DP1.2 sources (Note 2).
- Supports digital audio stream over DisplayPort or HDMI output.
- Idea for multi-display and TV-Wall application.
- Compatible with DisplayPort v1.2a /1.1a, HDMI v1.4a, VESA DDM, and EDID v1.4 Std.
- Supports DisplayPort link rates of 5.4Gbps (HBR2), 2.7Gbps (HBR) and 1.62Gbps (RBR).
- Supports exceptional Secured Content Protection with HDCP v1.3 for digital content.
- Drivers free under Microsoft Windows, MAC and Linux operations.
- Hot Plug & Plug-n-play feature without configuration.
- Certified by CE, FCC, VCCI, BSMI, C-Tick, and RoHS.

Specifications

Model	DPU3000	
Description	Tiny Universal DisplayPort Graphics Splitter	
Interface	DisplayPort™ v1.2 / 1.1a	
Video input Connectivity	Mini DisplayPort™ Female	 <p>Left: Micro-B +5VDC@1A Power Input. Right: Mini DisplayPort Input.</p>
Video output Connectivity	1-port DisplayPort™ v1.2, DP++ Female	 <p>DP++ Output</p>
	1-port HDMI Ver1.4 Female	 <p>HDMI Output</p>
	1-port VGA (RGB) (Note 3)	 <p>VGA Output</p>
Audio output Connectivity	Digital Audio output over DisplayPort or HDMI connection	
LED	Blue LED indicates DisplayPort source link status.	
Resolution Support (Triple monitors)	<p>DisplayPort1.2 MST source: (multi video/audio steams) max 2560x1600piex@60Hz each monitor.</p> <p>DisplayPort 1.1 SST or DisplayPort1.2 SST source: max 1920x1080piex@60Hz each monitor, 3840x1200piex@60Hz collage-display (ViewXpand mode).</p> <p>GPU dependent (Note 4).</p>	
Display Resolution and Maximum Number of Monitors	DisplayPort 1.2 offers the higher pixel rate available, there is a limitation in how many pixels can be sent down the display pipe. The table below provides maximum monitor count vs. display resolution, based and DisplayPort 1.2 bandwidth limits. It is not required that all of the screens use the same resolution.	
	Display Resolution(standard 60 frames per second refresh rate)	Maximum Number of Monitors based on DisplayPort 1.2 Bandwidth
	1680 x 1050 (WSXGA)	5
	1920 x 1080 (1080p) or 1920 x 1200	4
	2560 x 1600 (WQXGA)	2
3840 x 2160 (UltraHD, 4K) or 4096 x 2160 (4K x 2K)	1	


Power Consumption	1.45W +3.3VDC DisplayPort Bus Power
Power Connector	1-port Micro-B USB port +5VDC in (Reserved)
Case Material	ABS
Weight	40g ± 2g (1.5oz)
Dimensions	70x54x14mm (0.23x0.18x0.05ft).
Regulatory Approvals	EUR: CE, EN55022 Class B, EN55024, EN61000-3-2, EN61000-3-3 US: FCC Part 15 Class B TAIWAN: BSMI: CNS13438 AS/NZS: C-Tick: CISPR22 JAPAN: VCCI
O.S. support	Windows XP/2003/Vista/7/8/8.1, 2008/2012, (32/64-bit) Linux 2.6.x or later MAC Mountain Lion 10.8 or later (Note 4).
Environment	Operation temp. 0 °C ~ 40 °C (32-104°F) Operation humidity: < 85% non-condensing Storage temp. -10 °C ~ 85 °C (14~176°F)

Mechanical Drawings (Unit = mm)

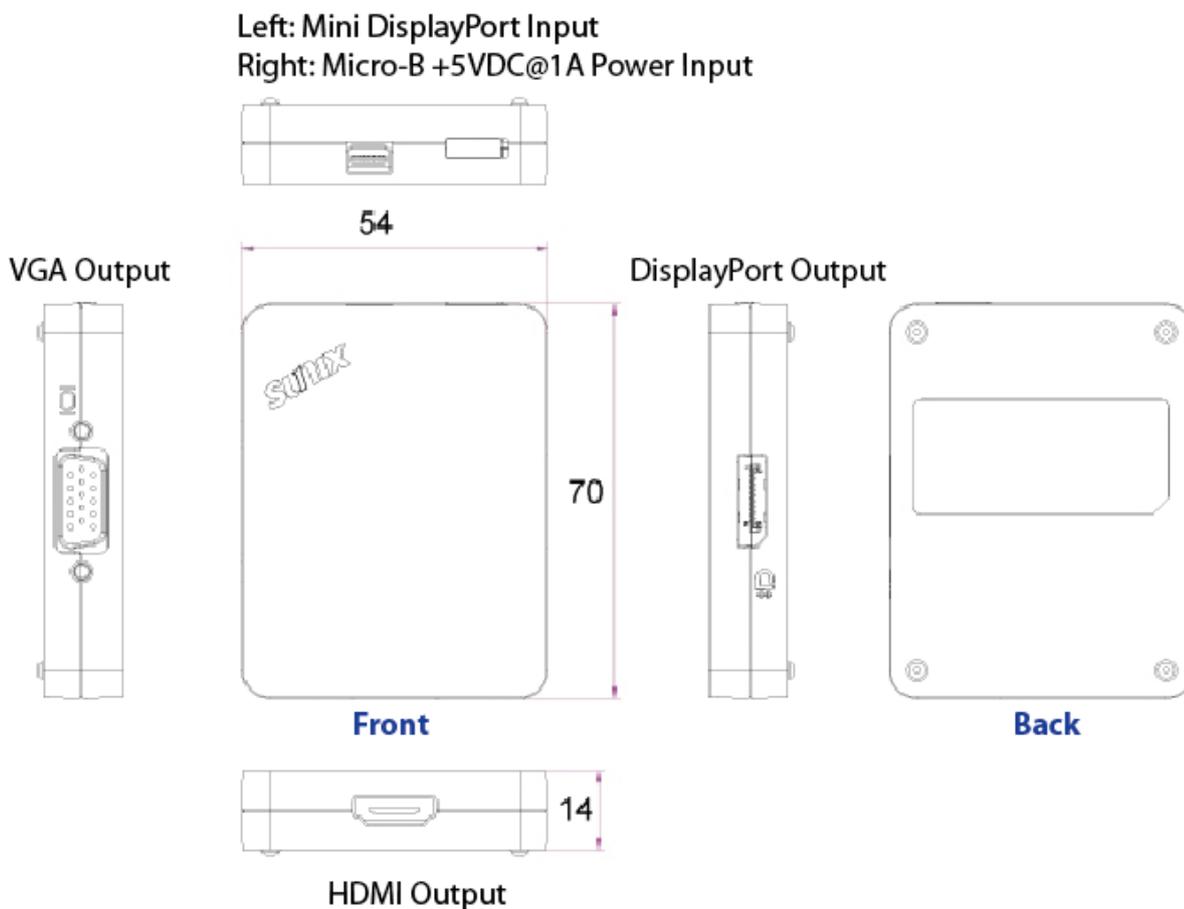


Applications


DP1.2 MST Mode

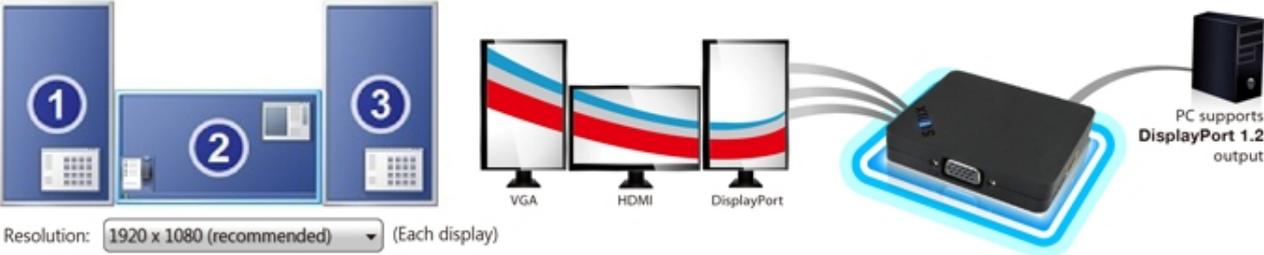

DP1.2 MST Mode with Multiple Display

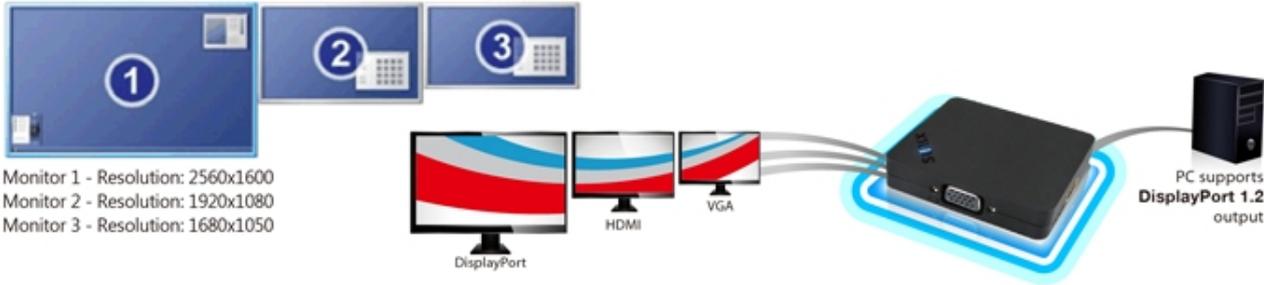

DP1.2 MST Mode with Collage display

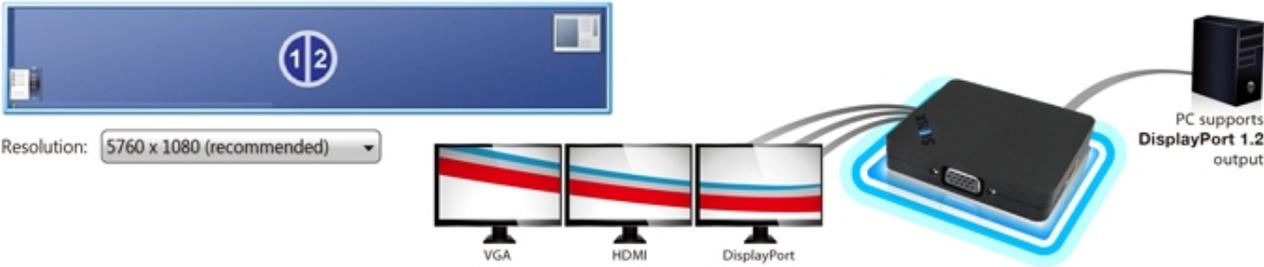

DP1.1 SST Mode



Note:

- * Display architecture based on Intel 4th Generation Intel® Core™ Processors (Haswell Platform).
- * Intel 3rd Generation Intel® Core™ Processors (IVY bridge Platform) supports DP1.1 SST mode only.

Package

- Tiny Universal Graphics Splitter
- Mini DisplayPort Male to Mini DisplayPort Male cable 100mm (4.0 ft.) x 1 (Optional)
- DisplayPort Male to Mini DisplayPort Male cable 100mm (4.0 ft.) x 1 (Optional)
- Quick Installation Guide

Optional Accessory

- D2H13N0 : DisplayPort to HDMI Dongle
- D2H23N0 : Mini DisplayPort to HDMI Dongle
- D2V17C0 : DisplayPort to VGA Dongle
- D2V27C0 : Mini DisplayPort to VGA Dongle
- H2V37C0 : HDMI to VGA Dongle

Note:

1. Intel Haswell platform supports maximum 3 independent displays working simultaneously, including AIO (All-in-one) or Notebook's display panel itself.
2. 6 combined monitors support by AMD Eyefinity multi-display technology.
3. SUNIX Triple-Head DisplayPort Splitter supports DP++ protocol that actively convert the DisplayPort™ signal to the VGA, DVI or HDMI connectivity over SUNIX video dongle.
4. GPU dependent. EDID (Extended Display Identification Data) maximum resolution capabilities may differ based on GPU capability. Output pixel and format options are compatible with VESA standards.
5. Tiny Universal DisplayPort Graphics Splitter does not support MAC system without NV or AMD graphics card built-in.

Headquarters

Taiwan

Sunix Co., Ltd.
Tel : +886-2-8913-1987
Fax : +886-2-8913-1986
Website : www.sunix.com
E-mail : info@sunix.com

America

SUNIX USA, INC.
Tel : +1 (626) 765-4031
Website : www.sunix.com

Germany

Sunix Vertriebs Gmbh
Tel : +49(0)6146-60 1345
Fax : +49(0)6146-60 1346
Website : www.sunix.com
E-mail : info@sunix-gmbh.de

China

Shanghai Office

Tel : +86-21-6469-1670
Fax : +86-21-6468-8346
Website : www.sunix.com.cn
E-mail : info@sunix.com.cn

Beijing Office

Tel : +86-010-65308429
Fax : +86-010-65308421

Shenzhen Office

Tel : +86-755-33500418