


Data sheet

2020-08-05
Product version 00
Document revision 0

Order No.: 1809092

Type: MSTBA 2,5/ 4-G-5,08-LR

PCB headers

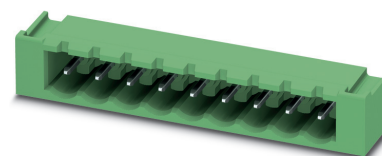

The figure shows a 9-position version

1 Main features



- | | | | |
|-------------------------|---------------------|------------------------|---------------------|
| • No. of pos. | 4 | • Nominal current | 12 A |
| • Nominal cross section | 2.5 mm ² | • Nominal voltage | 320 V |
| • Color | green (6021) | • Connection direction | 0 ° |
| • Pitch | 5.08 mm | • Type of packaging | packed in cardboard |
| • Mounting type | Wave soldering | | |

2 Your advantages

- ✓ Maximum flexibility when it comes to device design – one header for connectors with different connection technologies
- ✓ Well-known mounting principle allows worldwide use
- ✓ Automatic locking and intuitive release through Lock and Release operating lever in contrasting color
- ✓ Closed contour for optimum stability of the plug-in connection




Make sure you always use the latest documentation.
It can be downloaded at: phoenixcontact.net/product/1809092

1809092 MSTBA 2,5/ 4-G-5,08-LR**3 Table of contents**

1	Main features	1
2	Your advantages	1
3	Table of contents	2
4	3D model in PDF can be activated (Acrobat Reader only)	3
5	General Technical Data	4
	5.1 Item properties	4
6	Mounting.....	5
	6.1 Flange fixing	5
7	Material properties.....	5
	7.1 Material of metal parts.....	5
8	Dimensions.....	6
	8.1 Dimensions for the product	6
9	Series drawing.....	7
10	Application.....	8
11	Packaging information	8
	11.1 Temperature limit values	8
12	Mechanical tests.....	9
	12.1 Visual examination	9
	12.2 Dimensional test.....	9
	12.3 Resistance of marking	9
	12.4 Polarization and coding	9
	12.5 Contact retention in insert	9
13	Insertion and withdrawal forces	10
14	Electrical tests	11
	14.1 Electrical data	11
	14.2 Air and creepage distances	11
15	Current carrying capacity/derating curves	12
	15.1 Insulation resistance.....	12
	15.2 Vibration test	12
16	Approvals / Certificates.....	13
17	Commercial Data.....	14
18	Accessories.....	14
19	Combination tests.....	15

1809092 MSTBA 2,5/ 4-G-5,08-LR

4 3D model in PDF can be activated (Acrobat Reader only)

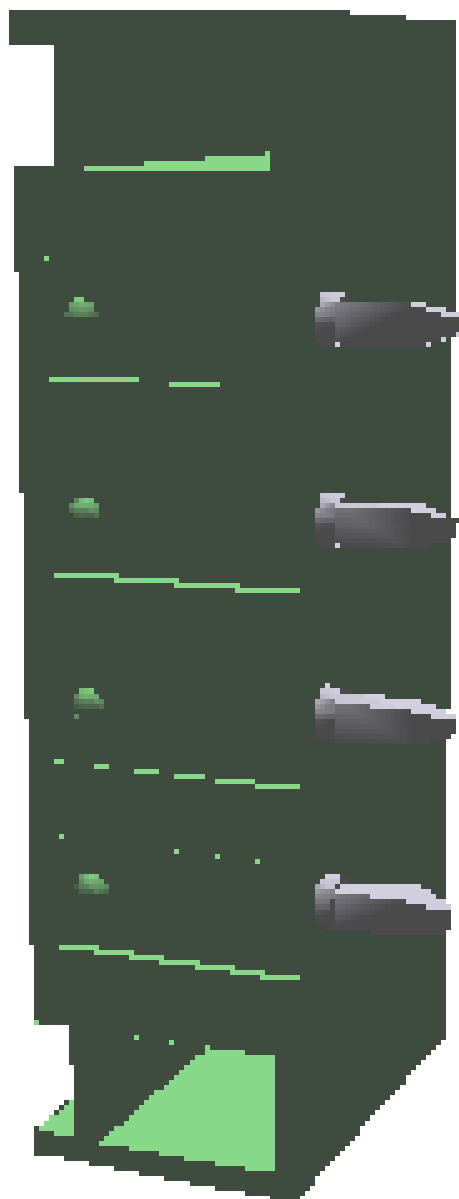

1809092 MSTBA 2,5/ 4-G-5,08-LR**5 General Technical Data****5.1 item properties**

Order No.	1809092
Type	MSTBA 2,5/ 4-G-5,08-LR
Plug-in system	CLASSIC COMBICON
Product type	PCB headers
Type of contact	Male connector
Range of articles	MSTBA 2,5/..-G-LR
Pitch	5.08 mm
Range of positions	2...20
Number of positions	4
Number of levels	1
Number of connections	4
Number of potentials	4
Mounting type	Wave soldering
Connection direction of the connector to the PCB	0 °
Pin layout	Linear pinning
Solder pins per potential	1

1809092 MSTBA 2,5/ 4-G-5,08-LR**6 Mounting****6.1 Flange fixing**

Type of locking	Snap-in locking
Mounting flange	Lock & Release


7 Material properties**7.1 Material of metal parts**

Note	WEEE/RoHS-compliant, whisker-free acc. to IEC 60068-2-82/JEDEC JESD 201
Contact material	Cu alloy
Surface contact area	Nickel (1 - 3 µm Ni), , Tin (3 - 5 µm Sn)
Soldering area surface	Nickel (1 - 3 µm Ni) , Tin (3 - 5 µm Sn)
Surface characteristics	Tin-plated
Insulating material data	Housing
Color	green (6021)
Insulating material	PBT
Insulating material group	IIIa
CTI according to IEC 60112	225
Flammability rating according to UL 94	V0

1809092 MSTBA 2,5/ 4-G-5,08-LR**8 Dimensions****8.1 Dimensions for the product**

Length	12 mm
Width	30.48 mm
Height (without solder pin)	8.6 mm
Total height	12.1 mm
Solder pin [P]	3.5 mm
Dimension a	15.24 mm

9 Series drawing

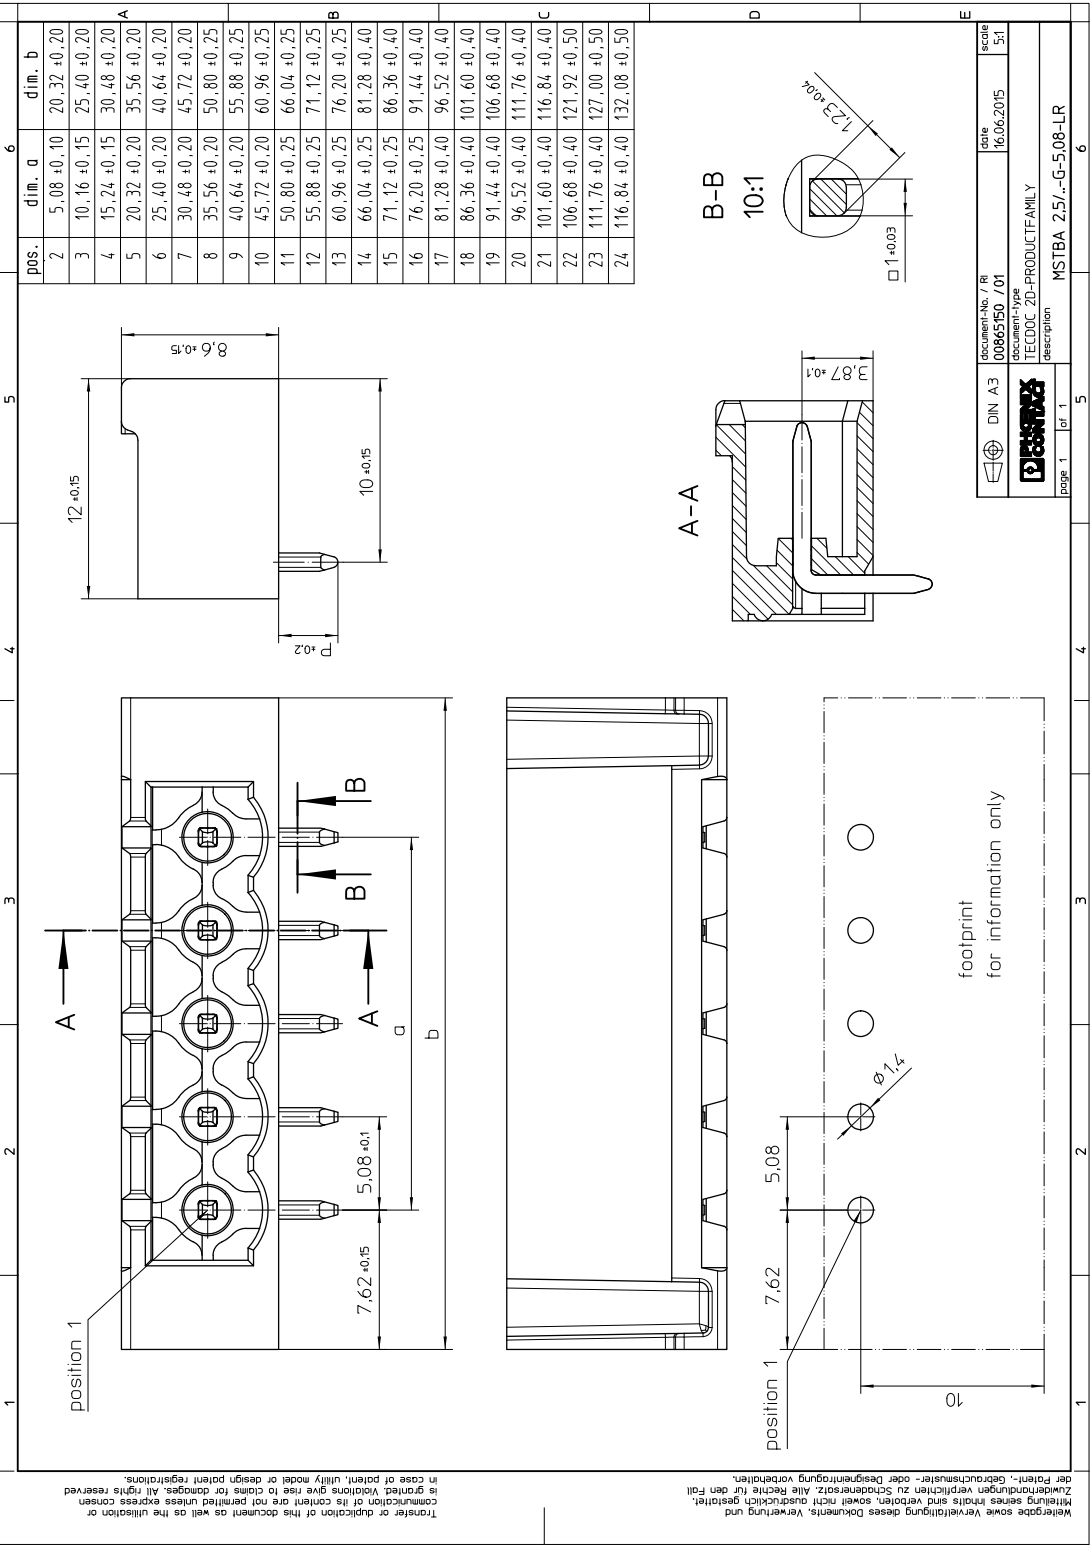

1809092 MSTBA 2,5/ 4-G-5,08-LR**10 Application****11 Packaging information**

Type of packaging	packed in cardboard
Pieces per package	50

11.1 Temperature limit values

Ambient temperature (storage/transport)	-40 °C ... 70 °C
Ambient temperature (assembly)	-5 °C ... 100 °C
Ambient temperature (operation)	-40 °C ... 100 °C (dependent on the derating curve)

1809092 MSTBA 2,5/ 4-G-5,08-LR**12 Mechanical tests****12.1 Visual examination**

Specification	IEC 61984:2008-10
Visual examination	Test passed
Specification	IEC 60512-1-1:2002-02

12.2 Dimensional test

Dimensional test	Test passed
Specification	IEC 60512-1-2:2002-02

12.3 Resistance of marking

Resistance of marking	Test passed
Specification	IEC 60068-2-70:1995-12

12.4 Polarization and coding

Polarization and coding	Test passed
Specification	IEC 60512-13-5:2006-02
Test force	20 N

12.5 Contact retention in insert

Contact retention in insert	Test passed
Specification	IEC 60512-15-1:2008-05
Test force per pos.	20 N

1809092 MSTBA 2,5/ 4-G-5,08-LR**13 Insertion and withdrawal forces**

Insertion and withdrawal force		Test passed
Specification		IEC 60512-13-2:2006-02
No. of cycles		25
Insertion strength per pos. approx.		8 N
Withdraw strength per pos. approx.		11 N

1809092 MSTBA 2,5/ 4-G-5,08-LR**14 Electrical tests****14.1 Electrical data**


Rated current / conductor cross section	12 A / 2.5 mm ²
Rated insulation voltage (III/2)	320 V
Rated surge voltage (III/2)	4 kV
Contact resistance	1.3 mΩ
Degree of pollution	2

14.2 Air and creepage distances

Component	PCB headers		
Specification	IEC 60664-1:2007-04		
Mains type	unearthed mains		
Insulating material group	IIIa		
Comparative tracking index (IEC 60112:2003-01)	CTI 225		
Rated insulation voltage	250 V	320 V	400 V
Rated surge voltage	4 kV	4 kV	4 kV
Degree of pollution	3	2	2
Overvoltage category	III	III	II
Minimum clearance case A (inhomogeneous field)	3 mm	3 mm	3 mm
Minimum value of the creepage path requirement in acc. with table	4 mm	3.2 mm	4 mm

1809092 MSTBA 2,5/ 4-G-5,08-LR**15 Current carrying capacity/derating curves**

Specification	IEC 61984:2008-10
Note	Representation based on IEC 60512-5-2:2002-02
Note	For number of positions, see diagram
Reduction factor	0.8
Conductor cross section	2.5 mm ²

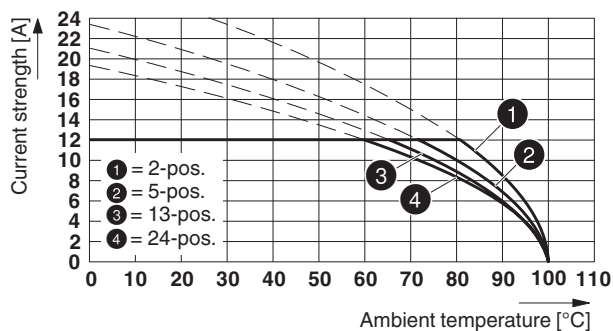Type: FKCO(R/W) 2,5/...-ST-5,08-LR with MSTBA(R/W) 2,5/...-G-5,08-LR**15.1 Insulation resistance**

Specification	IEC 60512-3-1:2002-02
Result	Test passed
Insulation resistance, neighboring positions	> 1.5 TΩ

15.2 Vibration test

Specification	IEC 60068-2-6:2007-12
Result	Test passed
Frequency	10 - 150 - 10 Hz
Sweep speed	1 octave/min
Amplitude	0.35 mm (10 - 60.1 Hz)
Acceleration	5 g (60.1 - 150 Hz)
Test duration per axis	2.5 h
Test directions	X-, Y- and Z-axis
Note	The connected conductor loops were guided to the test sample at a distance of approx. 10 cm.

1809092 MSTBA 2,5/ 4-G-5,08-LR**16 Approvals / Certificates**



IECEE CB Scheme 	Voltage [V]	Current [A]	Cross section [AWG]	Cross section [mm ²]
	250 V	12 A	-	-
EAC 				
VDE Zeichengenehmigung 	Voltage [V]	Current [A]	Cross section [AWG]	Cross section [mm ²]
	250 V	12 A	-	-
cULus Recognized 	Voltage [V]	Current [A]	Cross section [AWG]	Cross section [mm ²]
Usegroup B				
	300 V	15 A	-	-
Usegroup D				
	300 V	10 A	-	-

1809092 MSTBA 2,5/ 4-G-5,08-LR**17 Commercial Data**

Order No.	1809092
Type	MSTBA 2,5/ 4-G-5,08-LR
Pieces per package	50
Net weight	2.736 g
GTIN	4046356702546
	Information that applies locally, see link on page 1
Country of origin	Information that applies locally, see link on page 1

18 Accessories

Description	Order No.	Type
Keying cap, for forming sections, plugs onto header pin, green insulating material	1755477	MSTB-BL
	0804293	SK 5,08/3,8:FORTL.ZAHLEN
Coding section, inserted into the recess in the header or the inverted plug, red insulating material	1734401	CR-MSTB

1809092 MSTBA 2,5/ 4-G-5,08-LR**19 Combination tests****MSTBA 2,5/..-G-LR****FKCOR 2,5/..-ST-LR**

IEC 61984

IEC 61984

Mechanical tests (A)

Insertion/withdrawal force per position

approx. 8 N / 11 N

Polarization when inserted
Requirement >20 N

Test passed

Contact holder in insert
Requirements >20 N

Test passed

Durability tests (B)Contact resistance R_1

1.3 mΩ

Insertion/withdrawal cycles

25

Contact resistance R_2

1.3 mΩ

Rated impulse voltage at sea level
Voltage waveform $\geq (1.2/50 \mu s)$

4.8 kV

Power-frequency withstand voltage
Voltage waveform $\geq (50/60 \text{ Hz})$

2.21 kV

Thermal tests (C)

Tested number of positions

24

Tested conductor cross section

2.5 mm²

Test current

12 A

Upper limiting temperature
Requirements < 100°C

Test passed

Climatic tests (D)

Test sequence 1: low temperature storage

-40 °C/2 h

Test sequence 2: heat storage

100 °C/168 h

Test sequence 3: noxious gas storage
(ISO 6988)0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycleRated impulse voltage at sea level
Voltage waveform $\geq (1.2/50 \mu s)$

4.8 kV

Power-frequency withstand voltage
Voltage waveform $\geq (50/60 \text{ Hz})$

2.21 kV

Environmental and endurance tests (E)

Specification

IEC 61984:2008-10

Degree of protection

Finger safety with IP20
test finger